

RoHS Compliant

Specifications:

Material And Finish:

Insulator:General Purpose Phenolic Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:10.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:



Contact resistance:16m Ohm Max

Ordering Information



P8001S-XXXM-XX-A

1 2 3 4 5 6 7



- 1: — Series No.
2: — S: Straight Type
3: — No. of Positions
4: — S: Matte Tin Plated
Q: Tin Plated
5: — M: Male
6: — 01: Without Bracket
02: With Bracket
7: — A: In Bag





2 PIN



3 PIN




4 PIN

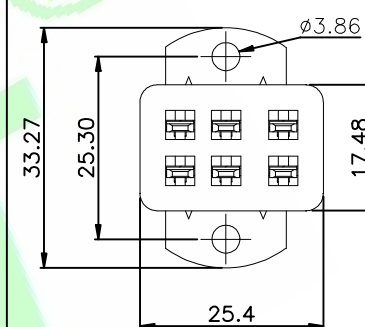


6 PIN

Without Bracket



With Bracket



DR.BY.:
Kenry

CHKD.:
Tony

APPD.:
Billy

GENERAL TOLERANCE:

LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : P8001S-XXXM-XX-A

DWG. NO.:

TITLE :

Plug Assembly Angle Bracket Male

DATE: 21-Jul-2016

HJBRIGHT® 东莞市華晶电子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Kenry	
REV.	DESCRIPTION	DR.BY	ECN. NO.