

Specifications:

Material And Finish:

Insulator:PA6T UL94V-0 Color:Black

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Dielectric Voltage:550V AC/Minute

Ordering Information

PCI1270M-12A-01-X

1 2 3 4 5

1:— Series No.

2:— M:SMT Type

3:— No. of Positions

4:— A:Gold Flash

Q:Tin Plated





S:Matte Tin Plated

5:— A:In Bag


B:In Tube

C:In Tray

F:W/Cap In Tape&Reel

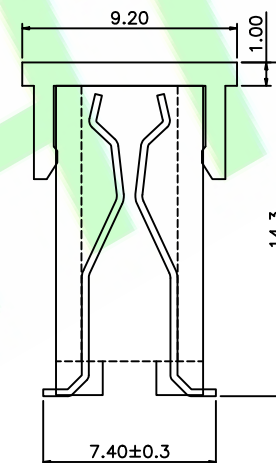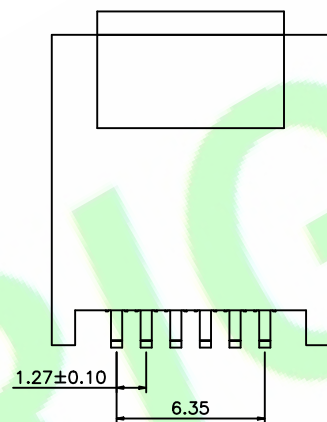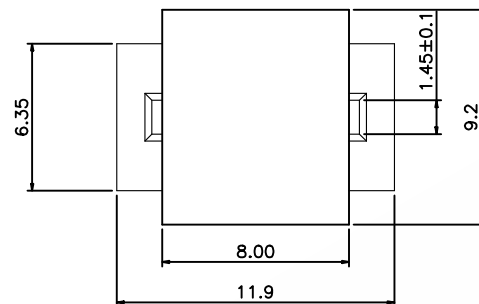

RECOMMENDED PCB LAYOUT

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : PCI1270M-12A-01-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	ANGLES	DWG. NO.:		
3X				CHKD.: Aren	X.: ±0.30	X': ±5.0°	TITLE :	SHEET: 1/1	 THIRD ANGLE PROJECTION
2X					X.X: ±0.20	X.X': ±3.0°	1.27mm PITCH PCI SMT Type	SCALE: 1:1	
1X	ORIGINAL	Judyyan		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	DATE: 1-Feb-2022	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°			A4