

RoHS Compliant







Specifications:

Insulator:PC UL94V-0 Color:Natural
Current Rating:70 Amp
Voltage Rating:1000V AC/DC
Operating Temperature Range:-40°~+125°C
Contact resistance:30m Ohm Max
Insulator resistance:400M ohm min.
Rated Impulse voltage:8KV
Mating cycles:500 cycles

Ordering Information

PM1480KF-01G-01-XA
1 2 3 4 5

- 1: — Series No.
2: — KF:Housing Female
3: — 01G:Grounding PIN
4: — P:PBT
PC:PC
5: — A:In Bag

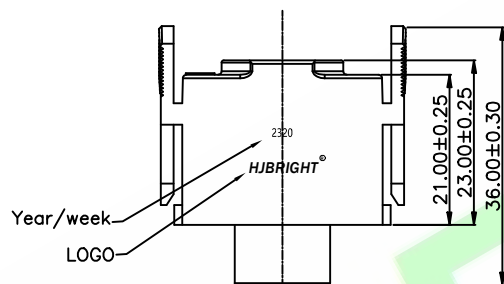

5X				DR.BY.: kang	GENERAL TOLERANCE:		PART NO : PM1480KF-01G-01-XA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X					LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.: kang	X.: ±0.30	X': ±5.0°	TITLE : 母座地线PIN塑胶	SHEET: 1/1			A4
2X					X.X: ±0.25	X.X': ±3.0°		SCALE: 1:1			
1X	ORIGINAL	kang		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°		DATE: 17-Aug-2023	UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°					