

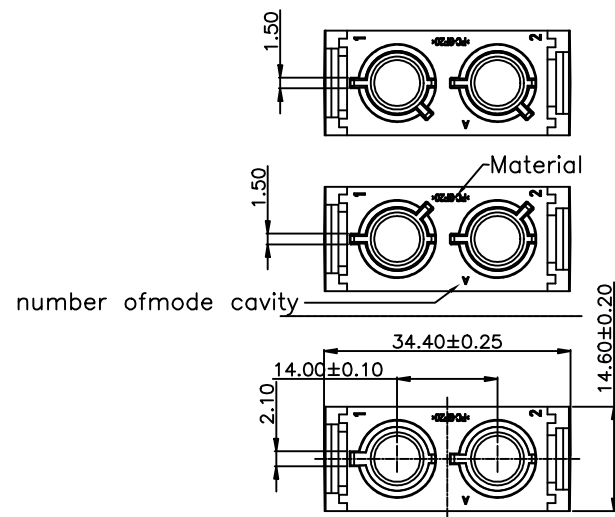
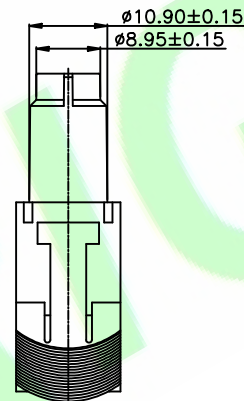


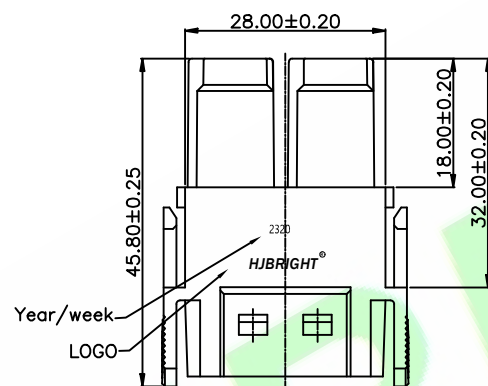

Fool-proof 3
PM1480KF-02-03-XA

Fool-proof 2
PM1480KF-02-02-XA


Fool-proof 1
PM1480KF-02-01-XA



Specifications:
Insulator:PC UL94V-0 Color:Natural
Current Rating:70 Amp
Voltage Rating:1000V AC/DC
Operating Temperature Range:-40°~+125°C
Contact resistance:30m Ohm Max
Insulator resistance:400M ohm min.
Rated Impulse voltage:8KV
Mating cycles:500 cycles
Wire range:10~25mm²

Ordering Information
PM1480KF-02-XX-XA

- 1: Series No.
2: KF:Housing Female
3: 02P:Power PIN
4: 01:01 Type
02:02 Type
03:03 Type
5: P:PBT
PC:PC
6: A:In Bag



5X				DR.BY.: kang	GENERAL TOLERANCE:		PART NO : PM1480KF-02-XX-XA	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: kang	x.: ±0.30	x': ±5.0°	TITLE : 14.0mm Pitch 母座电源PIN塑胶	SHEET: 1/1		A4
2X					x.x: ±0.25	x.x': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	kang		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 17-Aug-2023	UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°				