

RoHS Compliant

Specifications:

Insulator:PC UL94V-0 Color:Natural
Current Rating:70 Amp
Voltage Rating:1000V AC/DC
Operating Temperature Range:-40°~+125°C
Contact resistance:30m Ohm Max
Insulator resistance:400M ohm min.
Rated Impulse voltage:8KV
Mating cycles:500 cycles

Ordering Information

PM1480KM-01P-01-XA

1	2	3	56	
1: Series No.	2: KM:Housing Female	3: 01P:Power PIN	4: P:PBT PC:PC	5: A:In Bag

1: Series No.







2: KM:Housing Female

3: 01P:Power PIN

4: P:PBT

PC:PC

5: A:In Bag

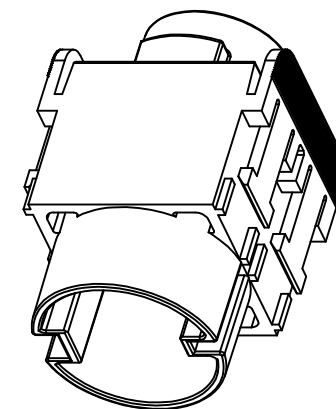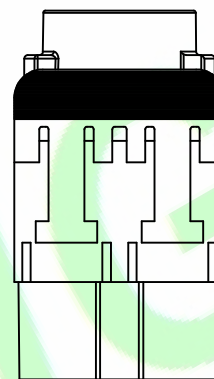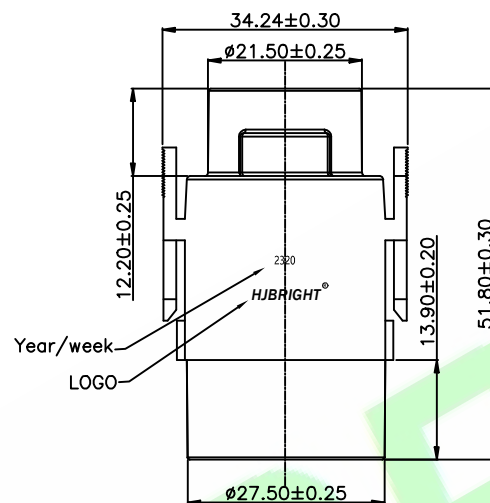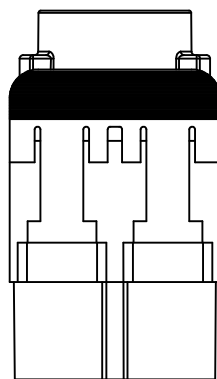

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : PM1480KM-01P-01-XA	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
4X				kang	LINEAR	ANGLES	DWG. NO.:				
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 公座电源PIN塑胶				
2X				kang	x.x: ±0.25	x.x': ±3.0°					
1X	ORIGINAL	kang		APPD.:	x.xx: ±0.15	x.xx': ±2.0°					
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 17-Aug-2023	SHEET: 1/1		A4	
							SCALE: 1:1	THIRD ANGLE PROJECTION			
							UNIT: mm				