

Specifications:


Insulator:PC UL94V-0 Color:Natural
Current Rating:70 Amp
Voltage Rating:1000V AC/DC
Operating Temperature Range:-40°~+125°C
Contact resistance:30m Ohm Max
Insulator resistance:400M ohm min.
Rated Impulse voltage:8KV
Mating cycles:500 cycles
Wire range:10~25mm²

Ordering Information

PM1480KM-02-XX-XA

1	2	3	4	5	6
---	---	---	---	---	---






- 1:—Series No.
2:—KF:Housing Male
3:—02P:Power PIN
4:—01:01 Type
02:02 Type
5:—P:PBT
PC:PC
6:—A:In Bag

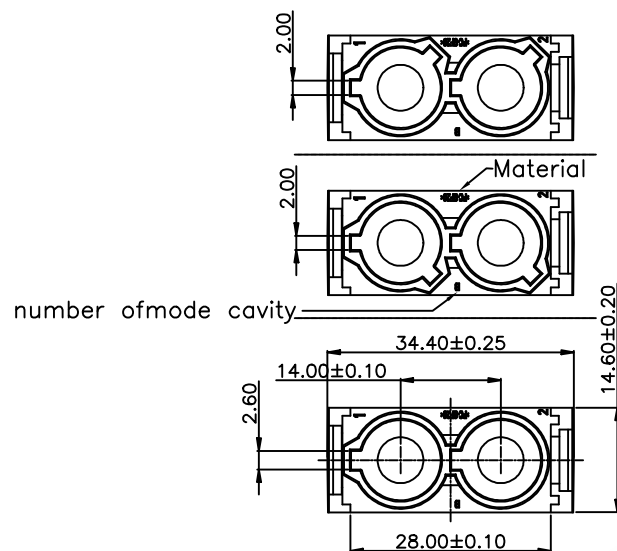


Fool-proof 3
PM1480KM-02-03-XA

Fool-proof 2
PM1480KM-02-02-XA

Fool-proof 1
PM1480KM-02-01-XA

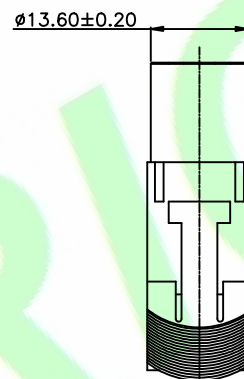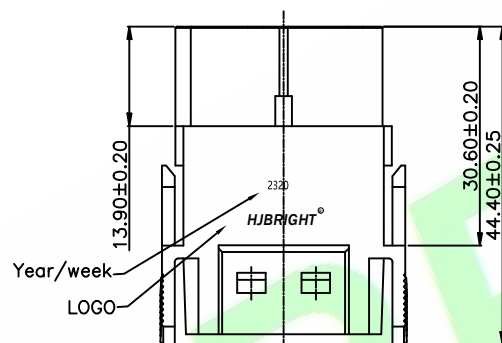

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : PM1480KM-02-XX-XA	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		SHEET: 1/1		A4
4X				kang	LINEAR	ANGLES	DWG. NO.:					
3X				CHKD.:	X.: ±0.30	X': ±5.0°	TITLE :	14.0mm Pitch 公座电源PIN塑胶		SCALE: 1:1	THIRD ANGLE PROJECTION	
2X				kang	X.X: ±0.25	X.X': ±3.0°	DATE: 17-Aug-2023			UNIT: mm		
1X	ORIGINAL	kang		APPD.:	X.XX: ±0.15	X.XX': ±2.0°						
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX: ±0.10	X.XXX': ±1.0°						