




Material: T2
Mating cycles: 500
Current Rating: 70 Amp

PM1480TM-01G-GX

1 2 3 45

- 1:—Series No.
2:—TM:Male Terminal
3:—01G:Grounding PIN
4:—G:high conductivity copper
5:—AG:Silvering Plated
S:Matte Tin Plated
Q:Tin Plated

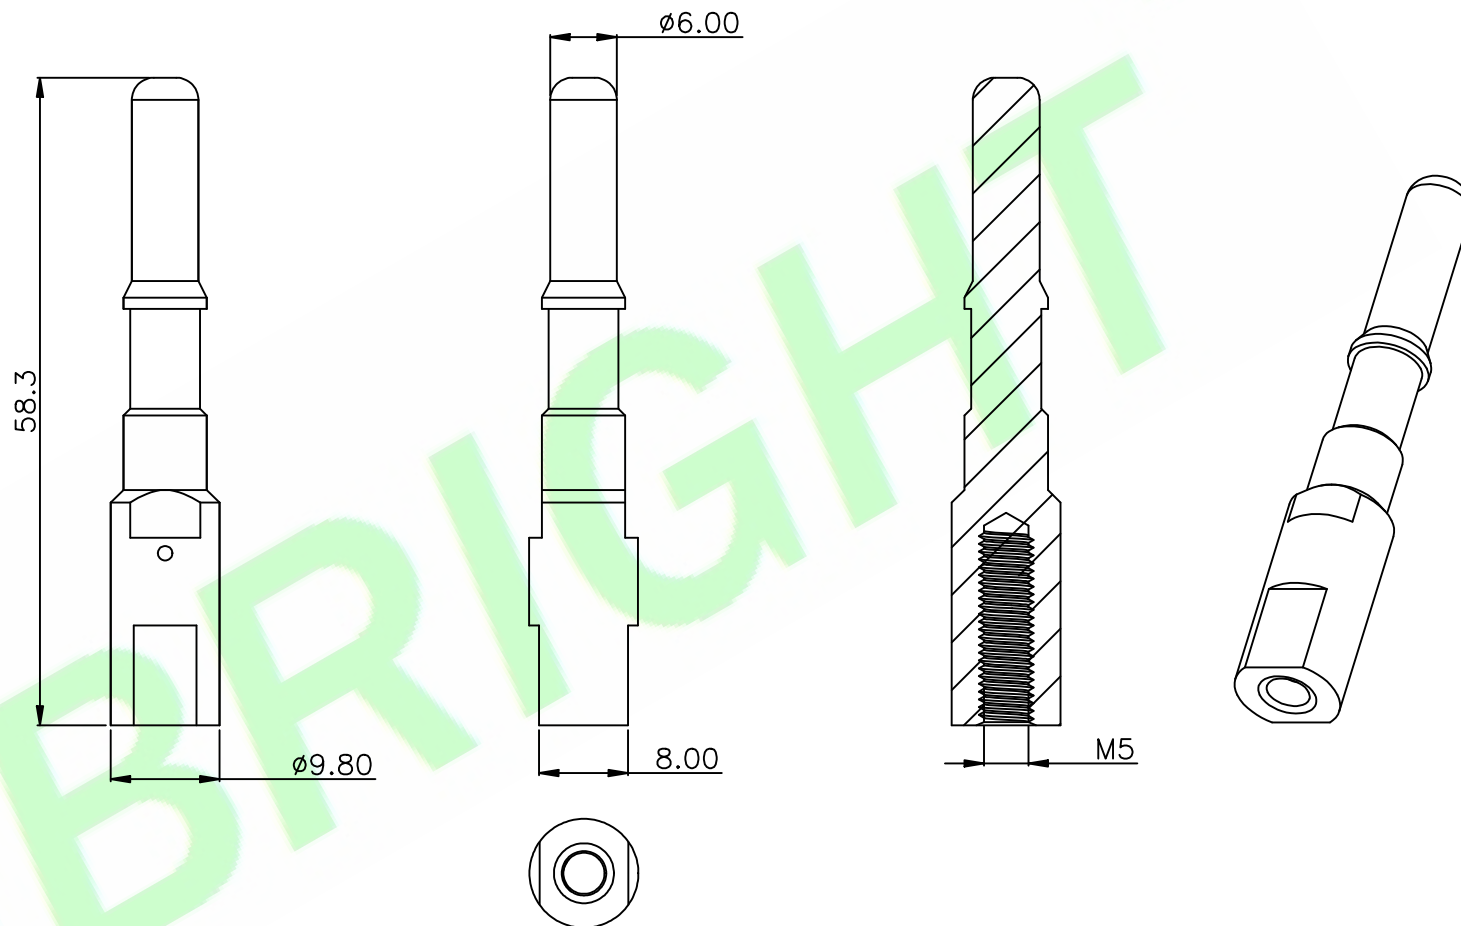

5X				DR.BY.: kang	GENERAL TOLERANCE:		PART NO : PM1480TM-01G-GX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED						
4X					LINEAR	ANGLES	DWG. NO.:								
3X				CHKD.: kang	X.:	X':	TITLE : 接地PIN公針		SHEET: 1/1			A4			
2X					X.X: ±0.20	X.X':			SCALE: 1:1						
1X	ORIGINAL	kang		APPD.:	X.XX: ±0.10	X.XX':			UNIT: mm				THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	X.XXX:±0.05	X.XXX':	DATE: 17-Aug-2023								
1		2		3		4		5		6		7		8	