
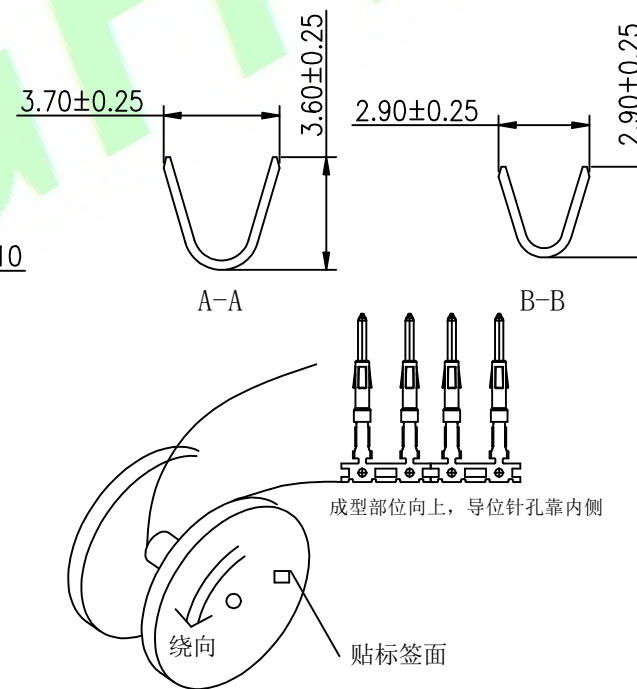


Specifications:
Insulator:C5191
Shell:SUS301
Mating cycles:500

Ordering Information
PM1480TM-12S-XX

1	2	3	45
---	---	---	----

- 1: — Series No.
2: — TM:Male Terminal
3: — 12S:Signal Pin
4: — B:Brass
P:Phosphor copper
G:high conductivity copper
5: — AG:Silvering Plated
S:Matte Tin Plated
Q:Tin Plated

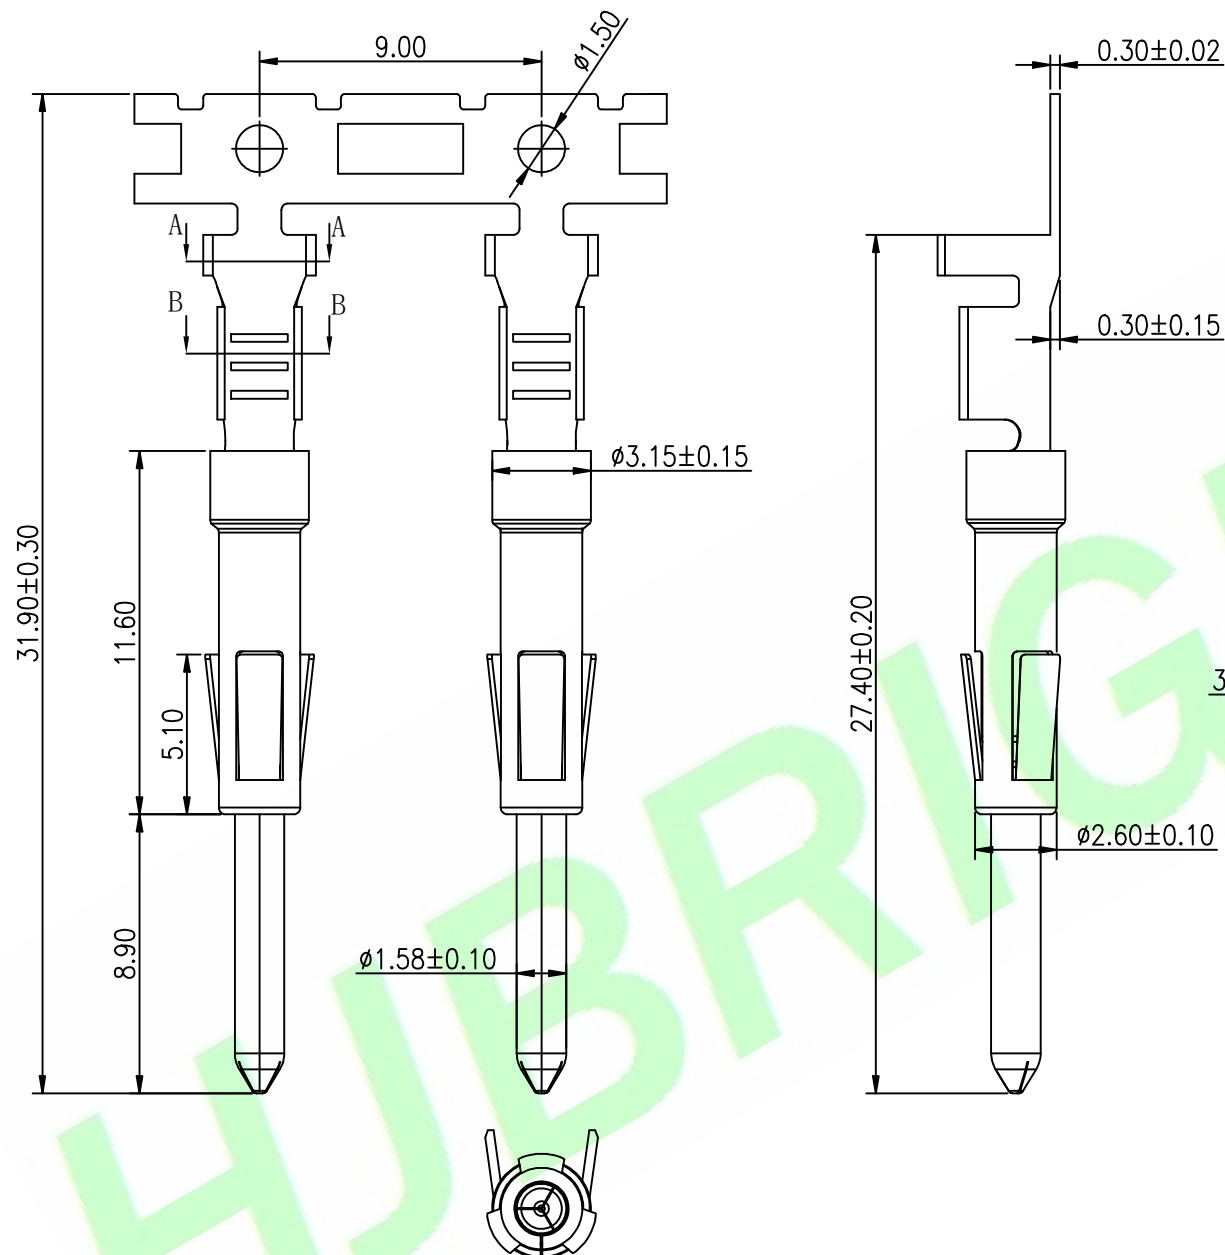

5X				DR.BY.: kang	GENERAL TOLERANCE:		PART NO : PM1480TM-12S-XX	HJBRIGHT® 东莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		A4
4X					LINEAR	ANGLES				
3X				CHKD.: kang	x.: ±0.30	x': ±5.0°	TITLE : 4.5mm Pitch 公座信号PIN端子			
2X					x.x: ±0.25	x.x': ±3.0°				
1X	ORIGINAL	kang		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 17-Aug-2023			
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°		SCALE: 1:1		
								UNIT: mm		THIRD ANGLE PROJECTION