

Specifications:

Material And Finish:

Insulator:PBT UL94V-0

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:2.0 Amp

Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Ordering Information

PM2540R-30FX-01-XX

1 2 3 4 5 6 7

1: — Series No.

2: — R:R/A Type

3: — No. of Positions

4: — F:Female

5: — H:Gold flash on contact;Matte Tin on tail





A1:Gold flash on contact;Tin on tail

6: — W:White

B:Black


BE:Beige

7: — C:In Tray

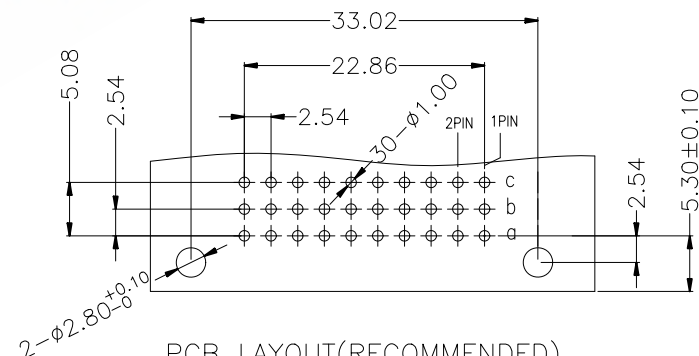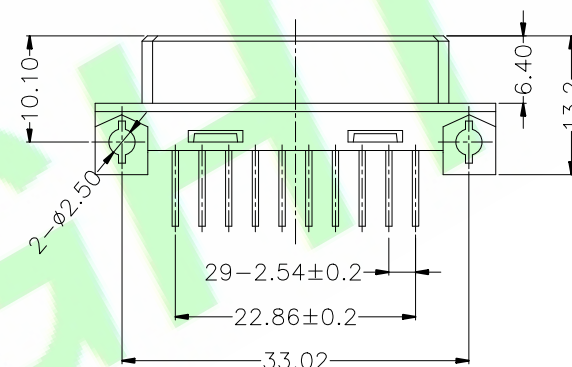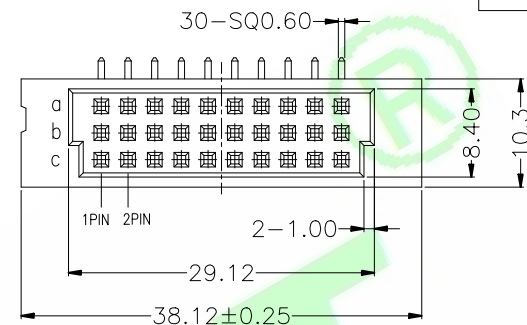

PCB LAYOUT(RECOMMENDED)

(TOP VIEW TOL. :±0.05)

				DR.BY.: Bin		GENERAL TOLERANCE:		PART NO : PM2540R-30FX-01-XX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED					
						LINEAR	ANGLES	DWG. NO.:							
				CHKD.: Judyyan		x.: x.x: ±0.25	x*: ±5.0° x.x*: ±3.0°	TITLE : 2.54mm Pitch BTB R Type Fmale							
						x.xx: ±0.20	x.xxx: ±2.0°								
				APPD.: Billy		x.xxx: ±0.10	x.xxx*: ±1.0°	DATE: 31-Jul-2024		SHEET: 1/1		 THIRD ANGLE PROJECTION		A4	
										SCALE: 1:1					
								UNIT: mm							
1X		ORIGINAL		Bin											
REV.		DESCRIPTION		DR.BY		ECN. NO.									
1				2				3		4		5		6	