

Specifications:

Material And Finish:

Insulator:LCP UL94V-0 Color:BLACK

Contact:High Conductivity Copper Alloy

Rating:

Current Rating:Signal Contact 2.5A AC,DC

Power Contact 50A AC,DC

Voltage Rating:Signal Contact 250V AC,DC

Operating Temperature Range:-40°~+105°C





Electrical:

Contact resistance:Signal Contact 30m Ohm Max

Power Contact 0.3m Ohm Max

Insulator resistance:5000M ohm min.

Withstanding Voltage:1500V AC/Minute

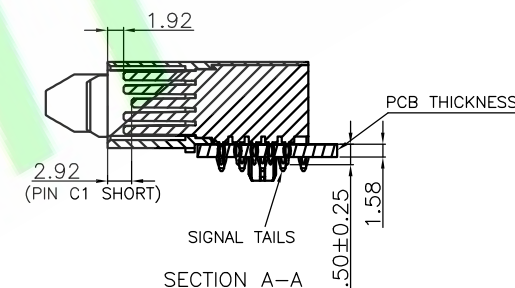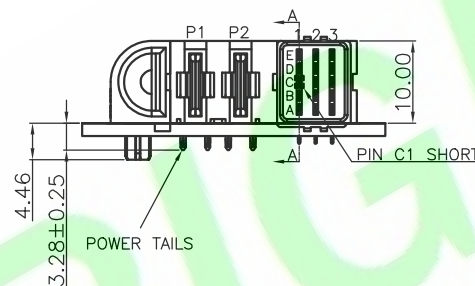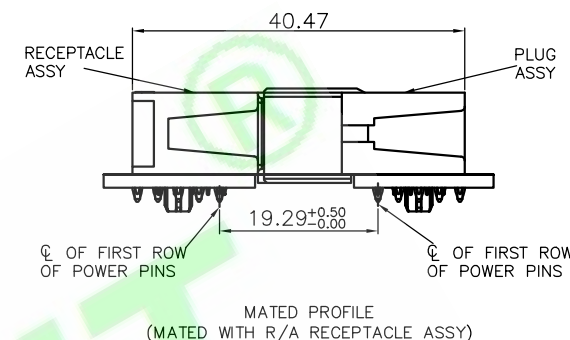

Ordering Information

PM55020R-17MY-01-C

1 2 3 4 5 6

1:— Series No.



2:— R:R/A Type

3:— No. of Positions

4:— M:Male

5:— Y:30u"Gold on Contact;Matte Tin on tail

6:— C:In Tray

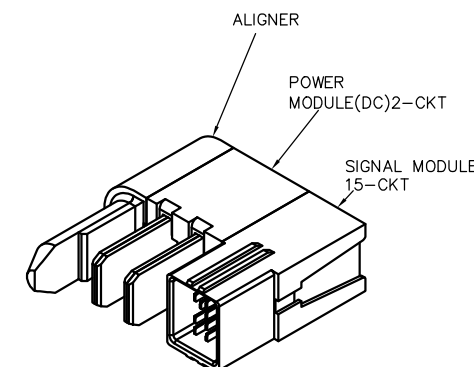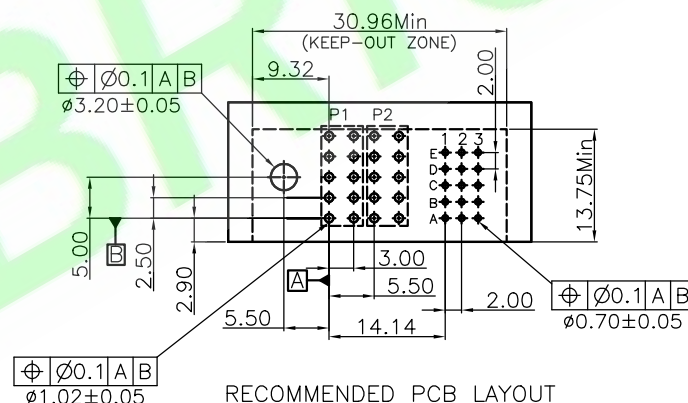

5X				DR.BY.:		GENERAL TOLERANCE:	PART NO : PM55020R-17MY-01-C
4X				Zolin		LINEAR	DWG. NO.:
3X				CHKD.:		x.: ±0.30	TITLE : 2 POWER PIN 15 SIGNAL PIN
2X				Tony		x.x: ±0.20	R/A PLUG ASSY-TEN60 POWER
1X	ORIGINAL	Zolin		APPD.:		x.xx: ±0.15	FAMILY
REV.	DESCRIPTION	DR.BY	ECN. NO	Billy		x.xxx: ±0.10	DATE: 30-Mar-2023
						x.xxx: ±1.0°	

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4