

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.


Withstanding Voltage:500V AC/Minute

Ordering Information

S12712M-XXX43-XX

1 2 3 4 5 6

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— 0:W/O Peg
1:With Peg
6:— A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

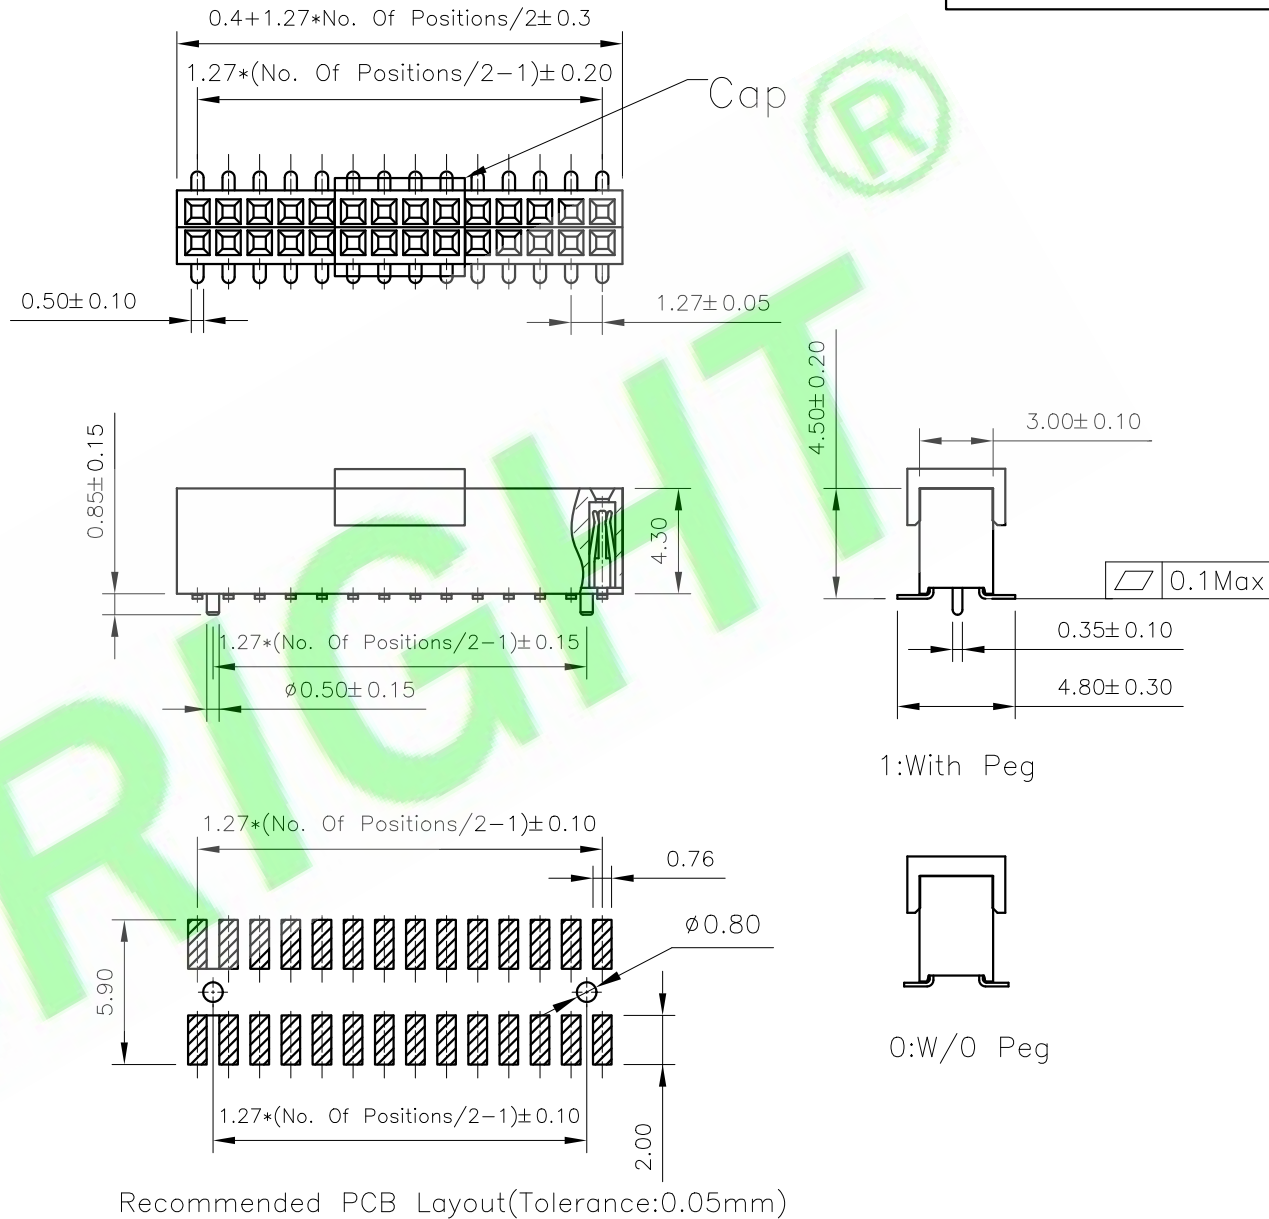

DR.BY:

XQR

GENERAL TOLERANCE:

LINEAR

ANGLES

x.: ±0.30 x': ±5.0°

x.x: ±0.20 x.x': ±3.0°

x.xx: ±0.15 x.xx': ±2.0°

x.xxx: ±0.10 x.xxx': ±1.0°

PART NO : S12712M-XXX43-XX

DWG. NO.:

TITLE :

1.27mm Pitch PCB Socket Header SMT Type

DATE: 20-Jan-2025

HJBRIGHT®


東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	XQR	
REV	DESCRIPTION	DR.BY	ECN. NO