

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

S12722M-XXX43-0X

1 2 3 4 5

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash

D:10u"Gold on Contact;Gold Flash on tail

F:20u"Gold on Contact;Gold Flash on tail


H:Gold Flash on Contact;Matte Tin on tail

T:10u"Gold on Contact;Matte Tin on tail

Y:30u"Gold on Contact;Matte Tin on tail.

S:Matte Tin Plated.

- 5:— A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

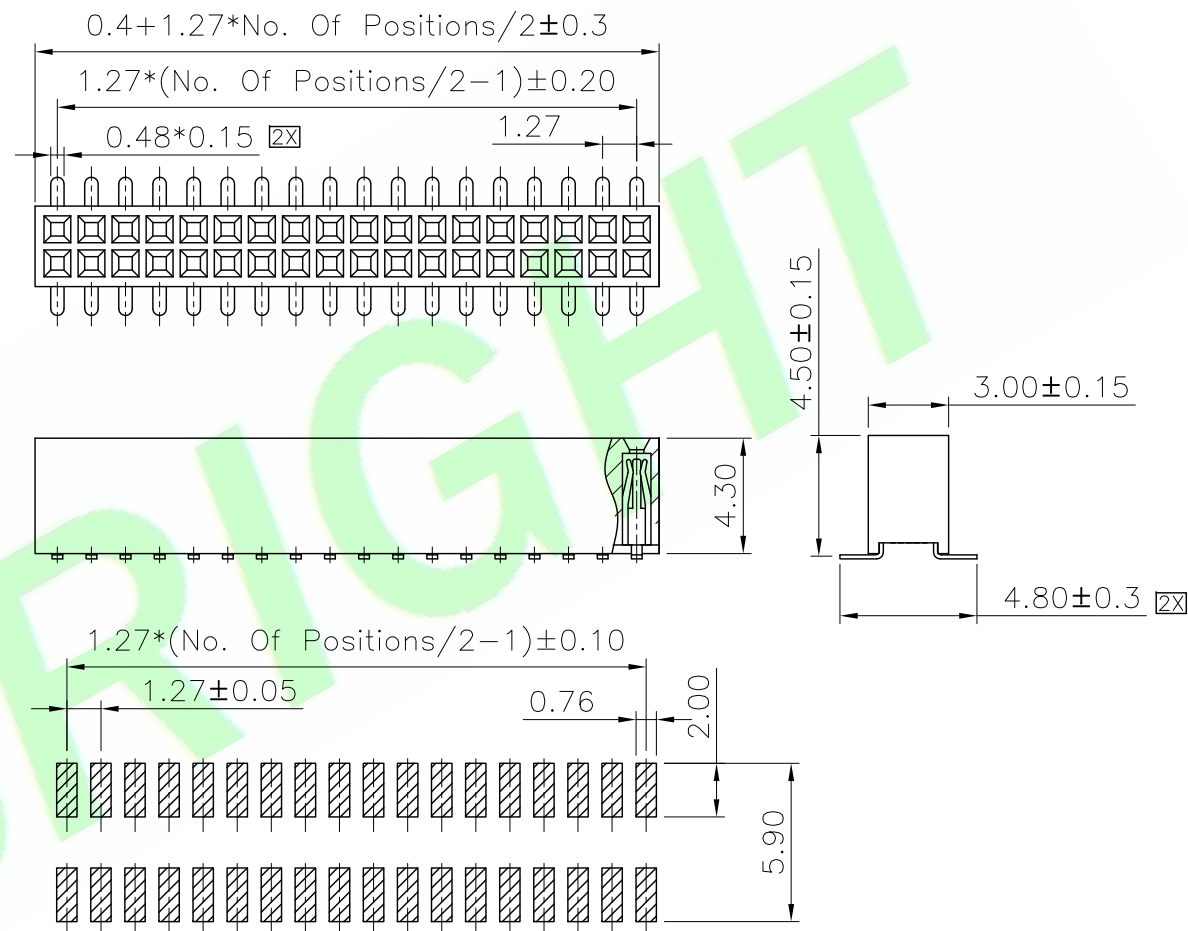

Recommended PCB Layout(Tolerance:0.05mm)

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : S12722M-XXX43-0X		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X				Samson	LINEAR	ANGLES	DWG. NO.: RD0806-114				
3X				CHKD.:	x.: ±0.30	x': ±5.0°	TITLE : 1.27mm Pitch PCB Socket Header SMT Type		SHEET: 1/1		A4
2X	修正SMT展开尺寸	Samson	17-Apr-2016	Tony	x.x: ±0.20	x.x': ±3.0°			SCALE: 1:1		
1X	ORIGINAL	joy chen		APPD.:	x.xx: ±0.15	x.xx': ±2.0°			UNIT: mm		
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx: ±0.10	x.xxx': ±1.0°	DATE: 28-Jun-2008				