


Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ} \sim +105^{\circ} \text{C}$

Withstanding Voltage:500V AC/Minute

1	2	3	4	5	6
---	---	---	---	---	---

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
H:Selective Gold Plated
Q:Tin Plated
5:— O:Without Peg
1:With Peg
6:— A:In bag
B:In Tube
C:In Tray
E:W/Cap In Tube
F:W/Cap In Tape&Reel

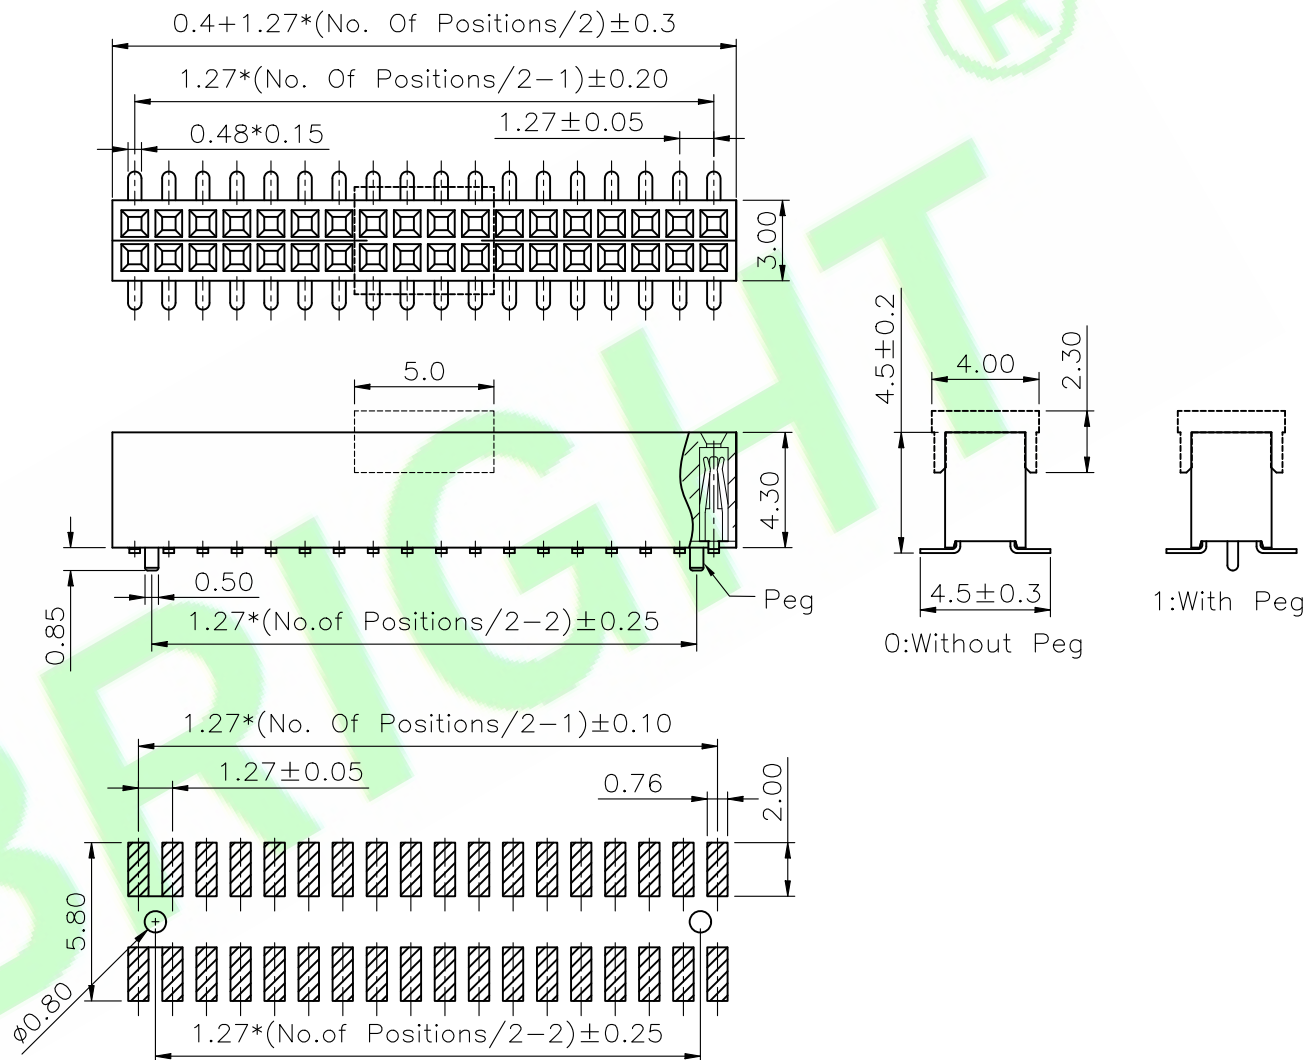

Recommended PCB Layout(Tolerance:0.05mm)

				DR.BY.: Samson	GENERAL TOLERANCE:		PART NO : S12722M-XXX43C-XX		HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			
					LINEAR	ANGLES						
				CHKD.: Tony	x.: ±0.30	x': ±5.0°	DWG. NO.:		TITLE : 1.27mm Pitch PCB Socket Header SMT Type	SHEET: 1/1		A4
					x.x: ±0.20	x.x': ±3.0°				SCALE:1:1		
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 12-Dec-2013		UNIT:mm	THIRD ANGLE PROJECTION		
REV.	DESCRIPTION	DR.BY	ECN. NO.		x.xxx: ±0.10	x.xxx': ±1.0°						