

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

S12722M-XXX43E-XX

1 2 3 4 5 6

1:— Series No.

2:— M:SMT Type

3:— No. of Positions

4:— A:Gold Flash

H:Selective Gold Plated

Q:Tin Plated

5:— 1:W/Peg

2:W/O Peg




6:— A:In bag

B:In Tube


C:In Tray

E:W/Cap In Tube

F:W/Cap In Tape&Reel

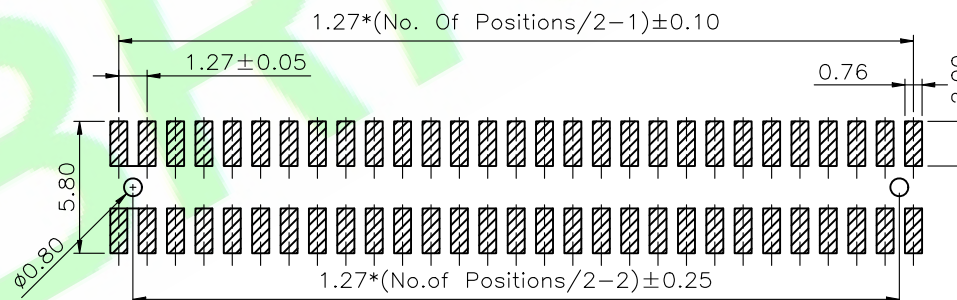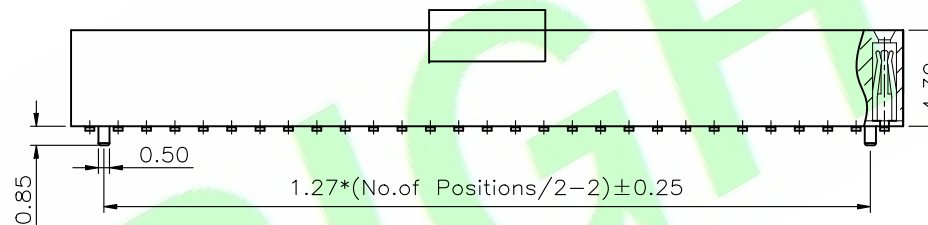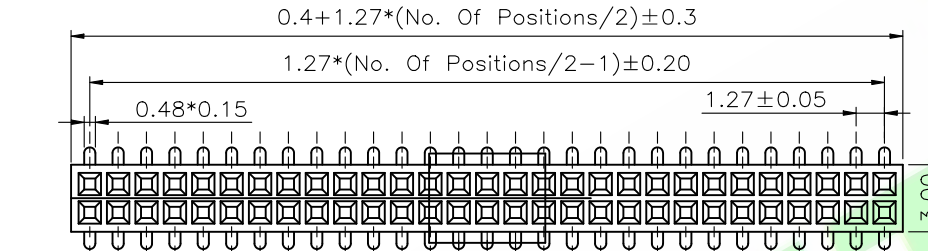

Recommended PCB Layout(Tolerance:0.05mm)



DR.BY:

Billy

GENERAL TOLERANCE:

LINEAR

ANGLES

CHKD.:

Samson

APPD.:

Tony

PART NO : S12722M-XXX43E-XX

DWG. NO.:

TITLE :

1.27mm Pitch PCB
Socket Header SMT Type

DATE: 18-05-2023

HJBRIGHT®


東莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Samson	
REV.	DESCRIPTION	DR.BY	ECN. NO.