

RoHS Compliant

Specifications:

Material And Finish:

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

S12722S-XXX43-X

1 2 3 4 5

1:— Series No.

2:— S:Straight Type

3:— No. of Positions

4:— A:Gold Flash

H:Selective Gold Plated


Q:Tin Plated

5:— A:In bag

B:In Tube

C:In Tray

F:W/Cap In Tape&Reel

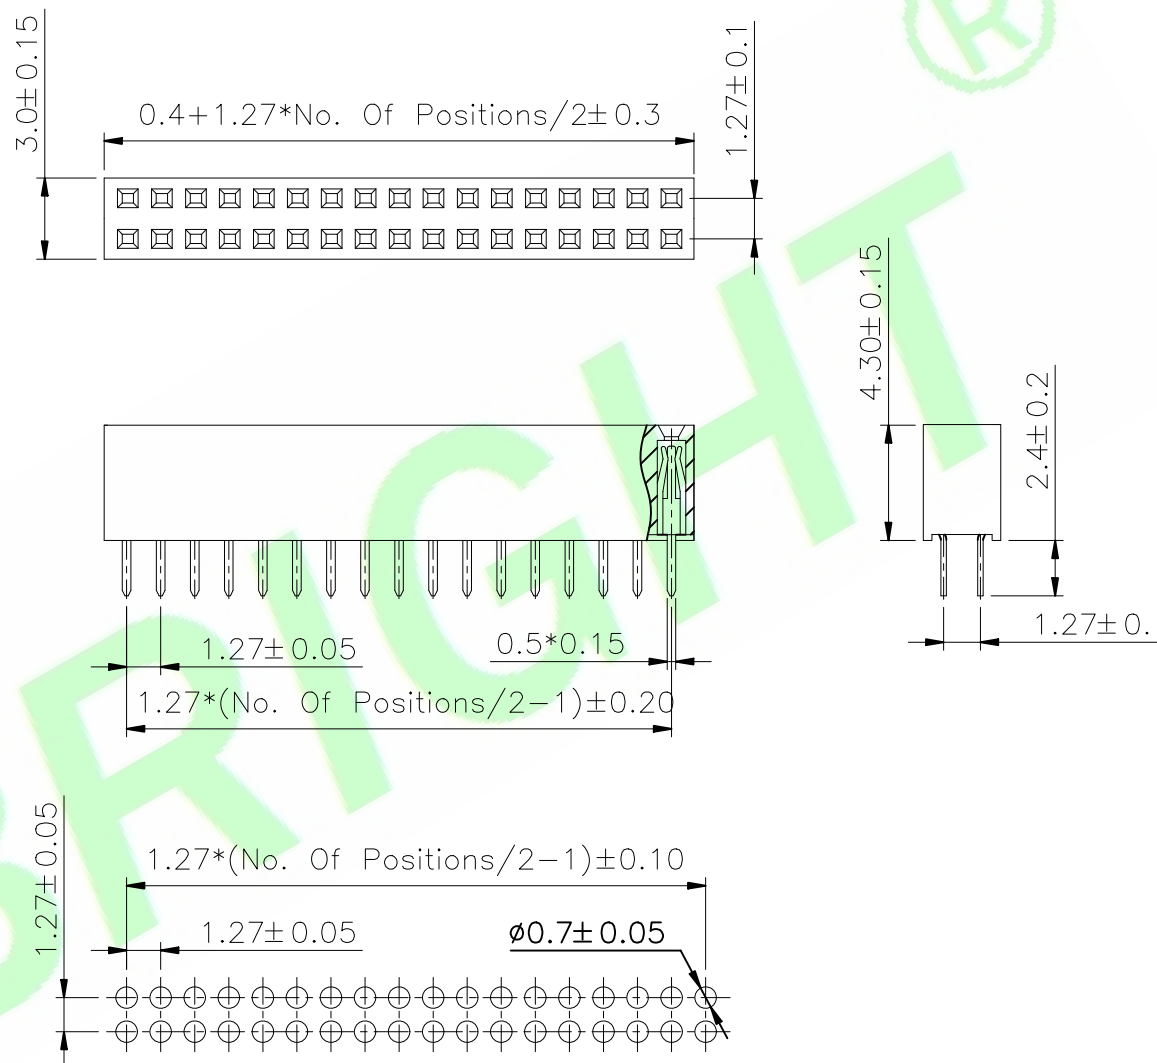

Recommended PCB Layout

1X	ORIGINAL	Stewie	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Stewie	GENERAL TOLERANCE:		PART NO : S12722S-XXX43-X
	LINEAR	ANGLES	
	X.: ±0.30	X': ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X': ±3.0°	
	X.XX: ±0.15	X.XX': ±2.0°	TITLE : 1.27mm Pitch PCB Socket Header Straight Type
CHKD.: Tony	X.XXX: ±0.10	X.XXX': ±1.0°	
APPD.: Billy	DATE: 28-Jun-2008		

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4