

Specifications:**Material And Finish:**

Insulator:Nylon 6T UL94V-0 Color:Black

Contact:Phosphor Bronze

Plated:See Ordering Information

Rating:

Current Rating:1.0 Amp

Voltage Rating:100V AC/DC

Operating Temperature Range:-40° ~+105° C

Electrical:

Contact resistance:20m Ohm Max



Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute


Ordering Information**S12762M-XXX48-0X**

1 2 3 4 5

- 1:— Series No.
2:— M:SMT Type
3:— No. of Positions
4:— A:Gold Flash
Q: Tin Plated
6:— A: In bag
B: In Tube
C: In Tray
E: W/Cap In Tube
F: W/Cap In Tape&Reel

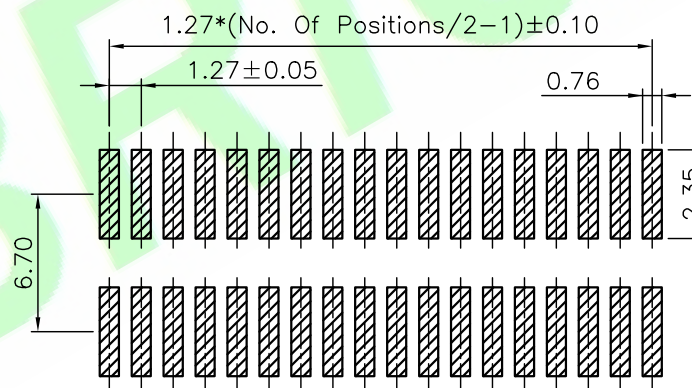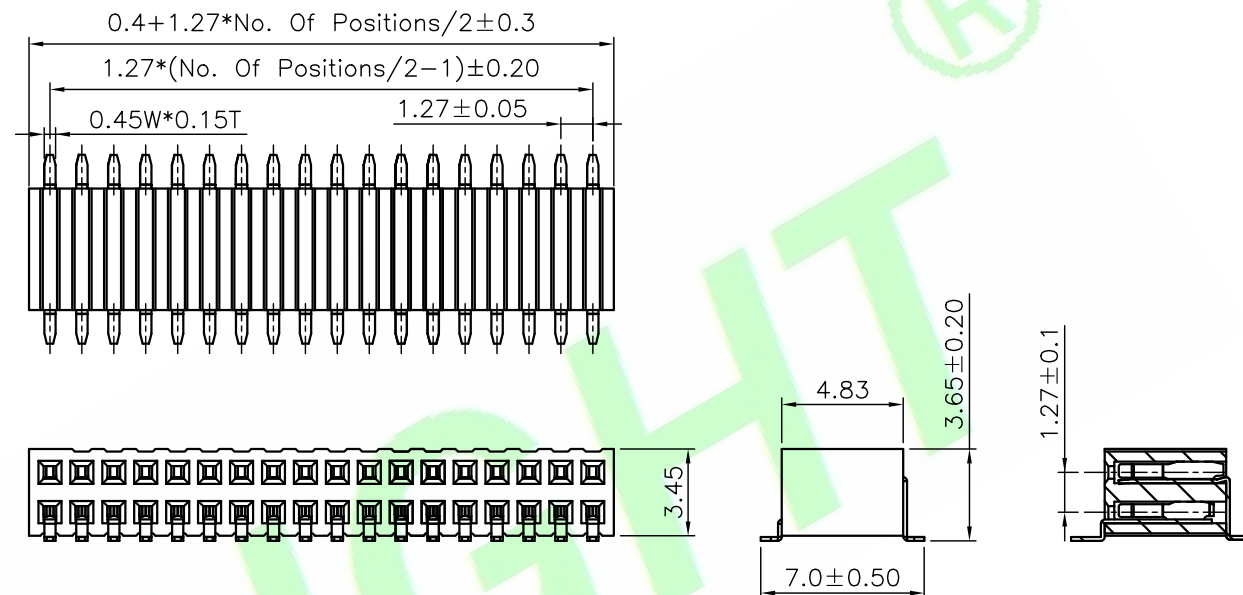

Recommended PCB Layout(Tolerance:0.05mm)

5X				DR.BY.: Samson	GENERAL TOLERANCE:	PART NO : S12762M-XXX48-0X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED	
4X					LINEAR	DWG. NO.: RD0807-009		
3X				CHKD.: Tony	x.: ±0.30	TITLE : 1.27mm Pitch PCB	SHEET: 1/1	
2X					x.x: ±0.20	Socket Header SMT Type Side Entry	SCALE: 1:1	
1X	ORIGINAL	Samson		APPD.: Billy	x.xx: ±0.15	DATE: 01-Jul-2008	UNIT: mm	
REV.	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±0.10			A4