




Plated: See Ordering Information

Operating Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$



Withstanding Voltage:500V AC/Minute


1	2	3	4	5
---	---	---	---	---

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— A: Gold Flash
5:— A: In bag
 B: In Tube
 C: In Tray
 F: W/ Cap In Tape & Reel

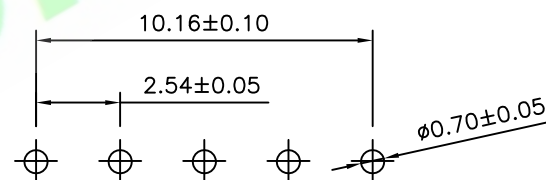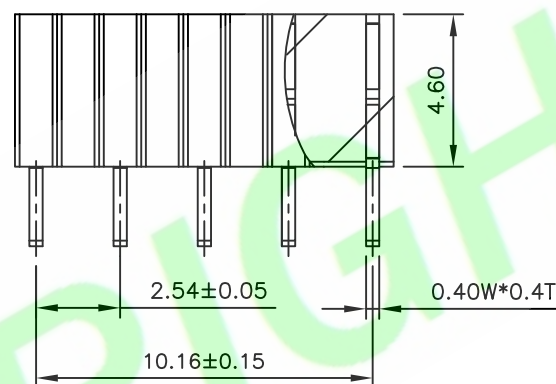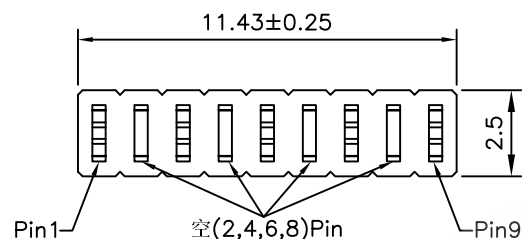

Recommended PCB Layout

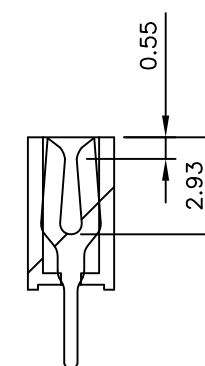

5X				DR.BY.: Bruce	GENERAL TOLERANCE:		PART NO : S27541S-09A46-V4-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X					LINEAR	ANGLES	DWG. NO.:			
3X				CHKD.: Tony	x.: ±0.30	x': ±5.0°	TITLE :			
2X					x.x: ±0.20	x.x': ±3.0°	1.27mm Pitch PCB Socket Header Straight Type 空(2,4,6,8)Pin			
1X	ORIGINAL	Bruce		APPD.: Billy	x.xx: ±0.15	x.xx': ±2.0°	DATE: 25-Apr-2018	SHEET: 1/1		A4
REV.	DESCRIPTION	DR.BY	ECN. NO		x.xxx: ±0.10	x.xxx': ±1.0°		SCALE: 1:1		
								UNIT: mm	THIRD ANGLE PROJECTION	