

Specifications:

Material And Finish:

Contact: Copper alloy

Plated: See Ordering Information

Rating:

Current Rating: 80 Amp

Voltage Rating: 250V AC/DC




Operating Temperature Range: $-40^{\circ}\sim+125^{\circ}\text{C}$

Electrical:

Contact resistance: 1m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 1000V AC/Minute

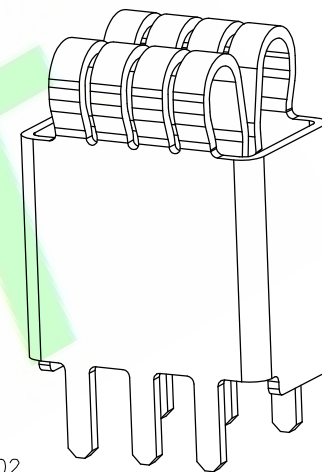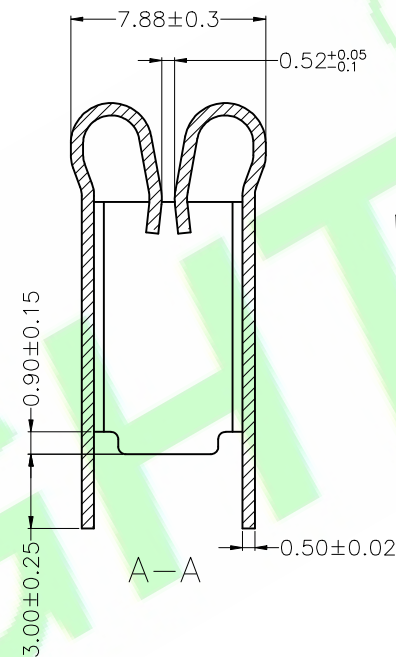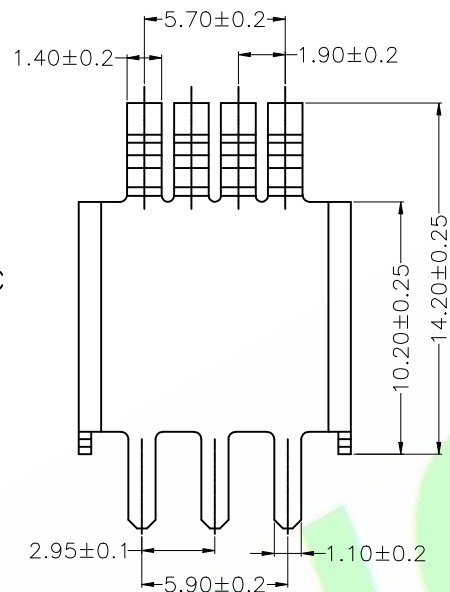

Ordering Information

SFPC-06-Q-X

1 2 3

1: — Series No.



2: — Q: Matte Tin Plated

3: — A: In bag


B: In Tube

C: In Tray

G: W/O Cap in Tape & Reel

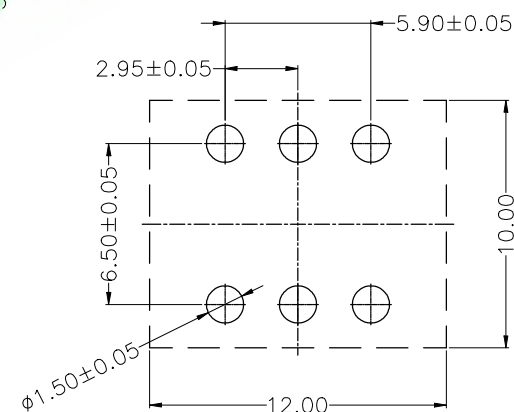

Recommended PCB Layout

5X				DR.BY.:	GENERAL TOLERANCE:		PART NO : SFPC-06-Q-X	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED			 THIRD ANGLE PROJECTION	A4
4X			Mark	LINEAR	ANGLES	DWG. NO.:						
3X			CHKD.:	x.: ±0.15	x': ±5.0°	TITLE : SFPC Terminal						
2X			Tony	x.x: ±0.10	x.x': ±3.0°							
1X	ORIGINAL	Mark	APPD.:	x.xx: ±0.05	x.xx': ±2.0°							
REV.	DESCRIPTION	DR.BY	ECN. NO.	Billy	x.xxx:	x.xxx': ±1.0°	DATE: 8-Aug-2022	SHEET: 1/1	SCALE: 1:1	UNIT: mm		