

Specifications:

Material: Brass, T=0.80mm

Plated: Matte Tin plated

Ordering Information

T934080-01-SA

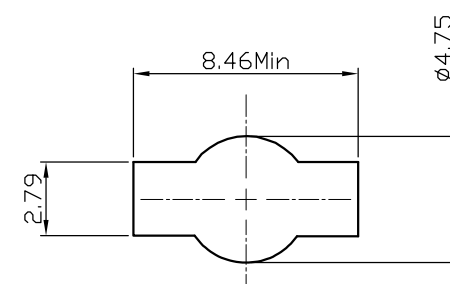

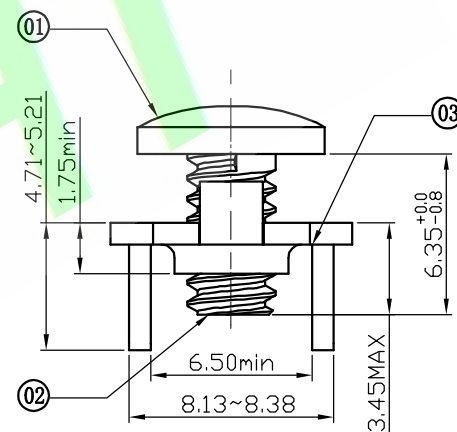
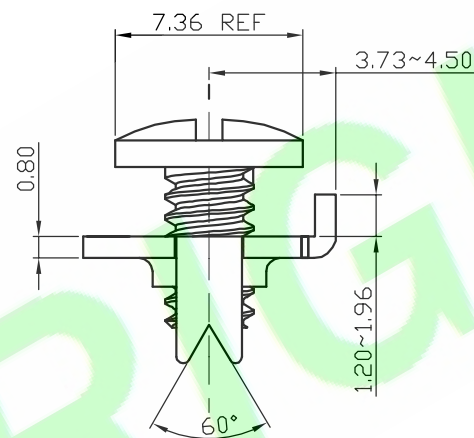

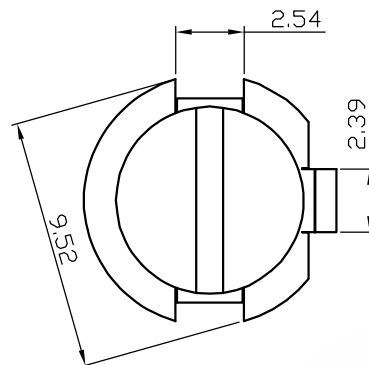
1

23

1: — Series No.


2: — S: Matte Tin Plated

3: — A: In Bag

Typical pcb
mounting configuration

Note:

01: Stainless steel Binding Head 6.35mm X 6-32
Screw Inserted Staked and Backed Out02: Screw must be staked such that the Screw cannot
be removed from the screw terminal with less than
than one inch pounds of torque and backed up
fully to staked area03: 90°+2°-0° Bend, two places, 0.38mm radius MAX.
or a formed recess may be used

5X				DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : T934080-01-SA	HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED		
4X						LINEAR	ANGLES			
3X				CHKD.: Aren	X.: ±0.30	X': ±5.0°	TITLE : 934 ST.S BINDING POST	SHEET: 1/1		A4
2X					X.X: ±0.25	X.X': ±3.0°		SCALE: 1:1		
1X	ORIGINAL	Judyyan		APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°		UNIT: mm		
REV	DESCRIPTION	DR.BY	ECN. NO.		X.XXX: ±0.10	X.XXX': ±1.0°	DATE: 4-Nov-2022			