

Specifications:

Material And Finish:

Insulator:Nylon 9T UL94V-0 Color:Black

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:5.0 Amp

Voltage Rating:30V AC/DC

Operating Temperature Range:-40°~+125°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

USBCF-24A-01-F

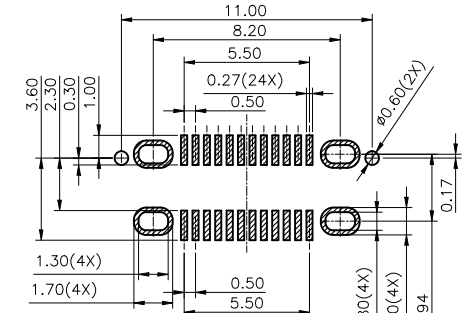
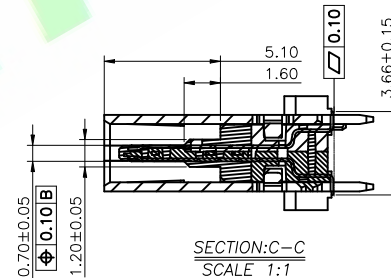
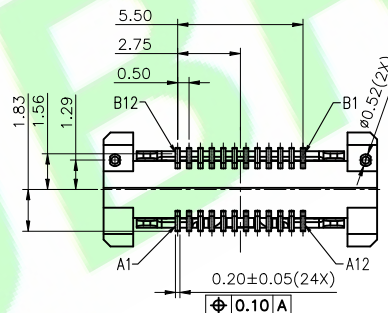
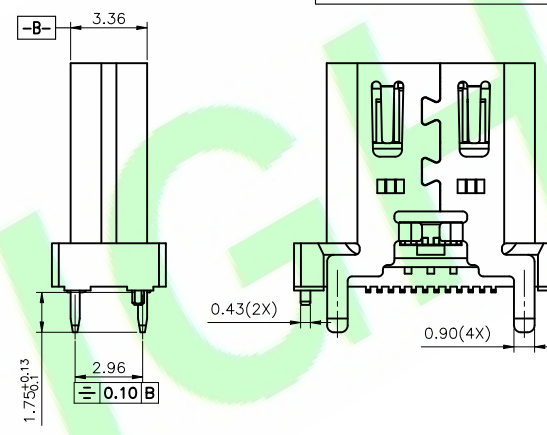
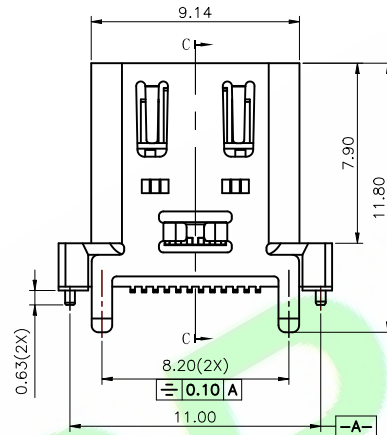
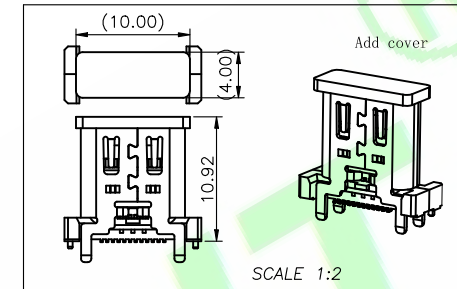
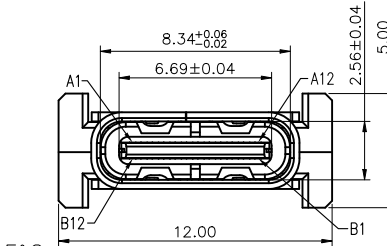
1 2 3 4

1: — Series No.

2: — No. of Positions

3: — A:Gold flash

4: — F:W/Cap In Tape&Reel

RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 1.0±0.10MM;DEFAULT TOLERANCE:±0.05

1X	ORIGINAL	Bin	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Bin	GENERAL TOLERANCE:		PART NO : USBCF-24A-01-F
	LINEAR	ANGLES	
CHKD.: Judyyan	X.: ±0.30	X': ±5.0°	DWG. NO.:
	X.X: ±0.20	X.X': ±3.0°	
APPD.: Billy	X.XX: ±0.15	X.XX': ±2.0°	TITLE : USB TYPE C 24PIN
	X.XXX: ±0.10	X.XXX': ±1.0°	
			DATE: 31-Jul-2024

HJBRIGHT® 東莞市華晶電子有限公司 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED				
SHEET: 1/1			THIRD ANGLE PROJECTION	A4
SCALE: 1:1				
UNIT: mm				