


RoHS Compliant

NOTE:


1. Material: Phosphor Bronze
2. Total Temperature Range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
3. Current Carrying Capacity: 5.0 Amp
4. Plated:
TA: 1~4um Bright over 1.2~2um Nickel

PRESS-IN AREA FOR 1.6mm PCB
REQUIREMENTS FOR PCB HOLE
PLATED HOLE:

DRILL- ϕ : 1.15 ± 0.025
FINISHED HOLE- ϕ : $0.94 \sim 1.09$
Cu-THICKN.: $25 \sim 75 \mu\text{m}$
SnPb-THICKNESS.: $4 \sim 10 \mu\text{m}$

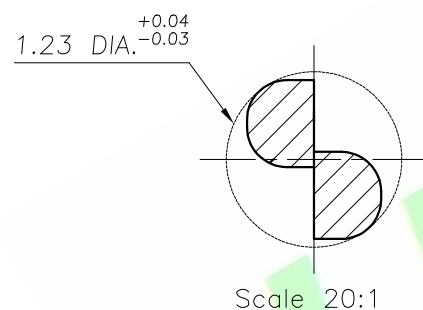

ROTATION PERMITTED
VERDREHUNG ERLAUBT

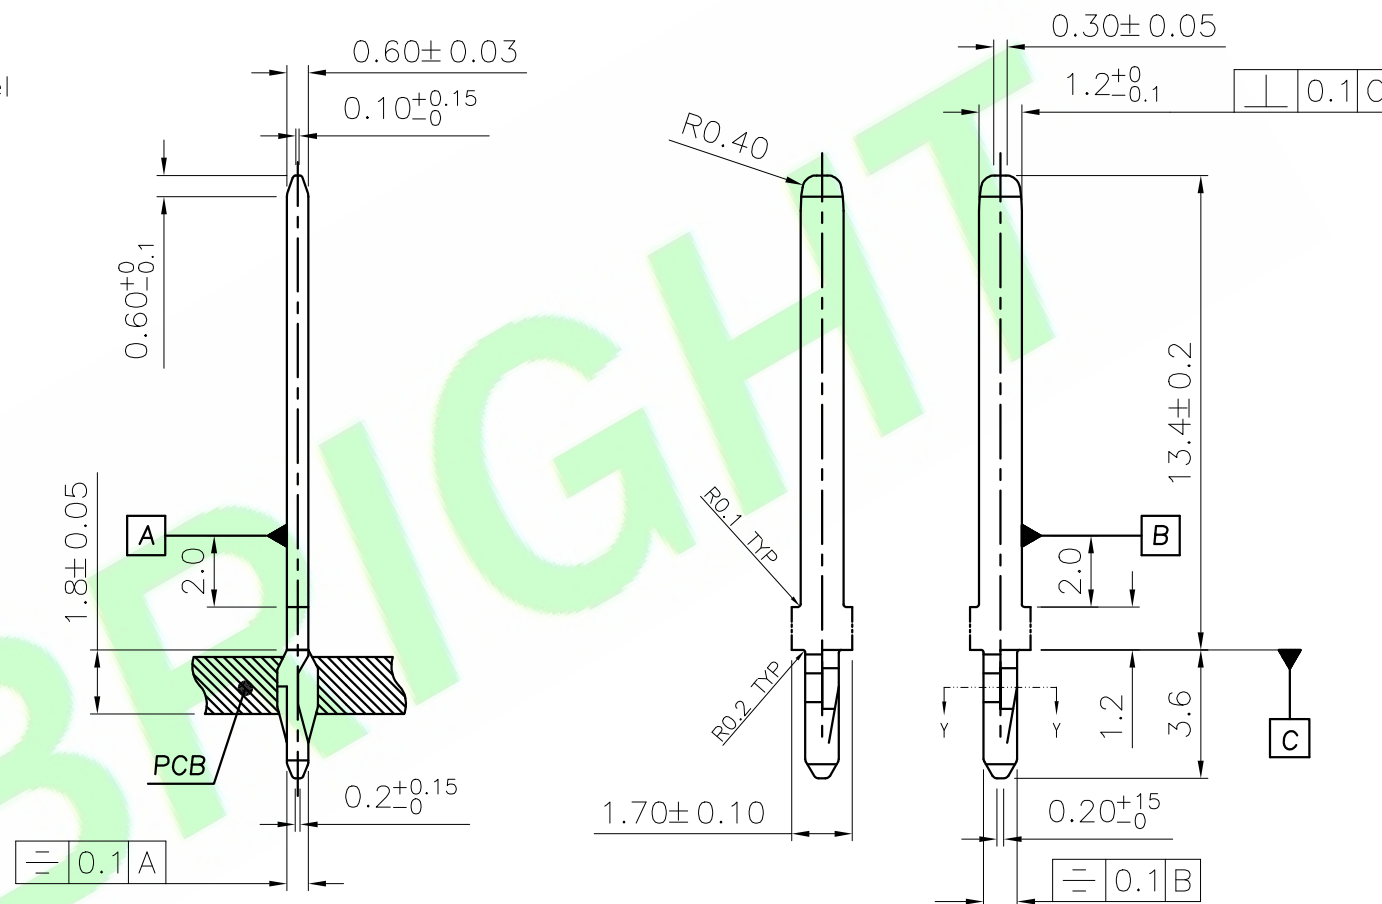

DR.BY.:	GENERAL TOLERANCE:		PART NO. : Y060L250-1700-A
	LINEAR	ANGLES	
Mark	x.: ± 0.30	x': $\pm 3.0^{\circ}$	DWG. NO.:
CHKD.: Tony	x.x: ± 0.25	x.x': $\pm 2.0^{\circ}$	
APPD.: Billy	x.xx: ± 0.10	x.xx': $\pm 1.0^{\circ}$	TITLE : 0.60mm fish-eye needle
	x.xxx: ± 0.03	x.xxx':	
			DATE: 2-Sep-2021

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

2X	New loose PIN material numbers have been added.	JoinZm	20250506
1X	ORIGINAL	Judyyan	
REV	DESCRIPTION	DR.BY	ECN. NO

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4