



RoHS Compliant

NOTE:

1. Material: Phosphor Bronze
2. Total Temperature Range: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
3. Current Carrying Capacity: 5.0 Amp
4. Plated:
TA: $1 \sim 4 \mu\text{m}$ Bright over $1.2 \sim 2 \mu\text{m}$ Nickel

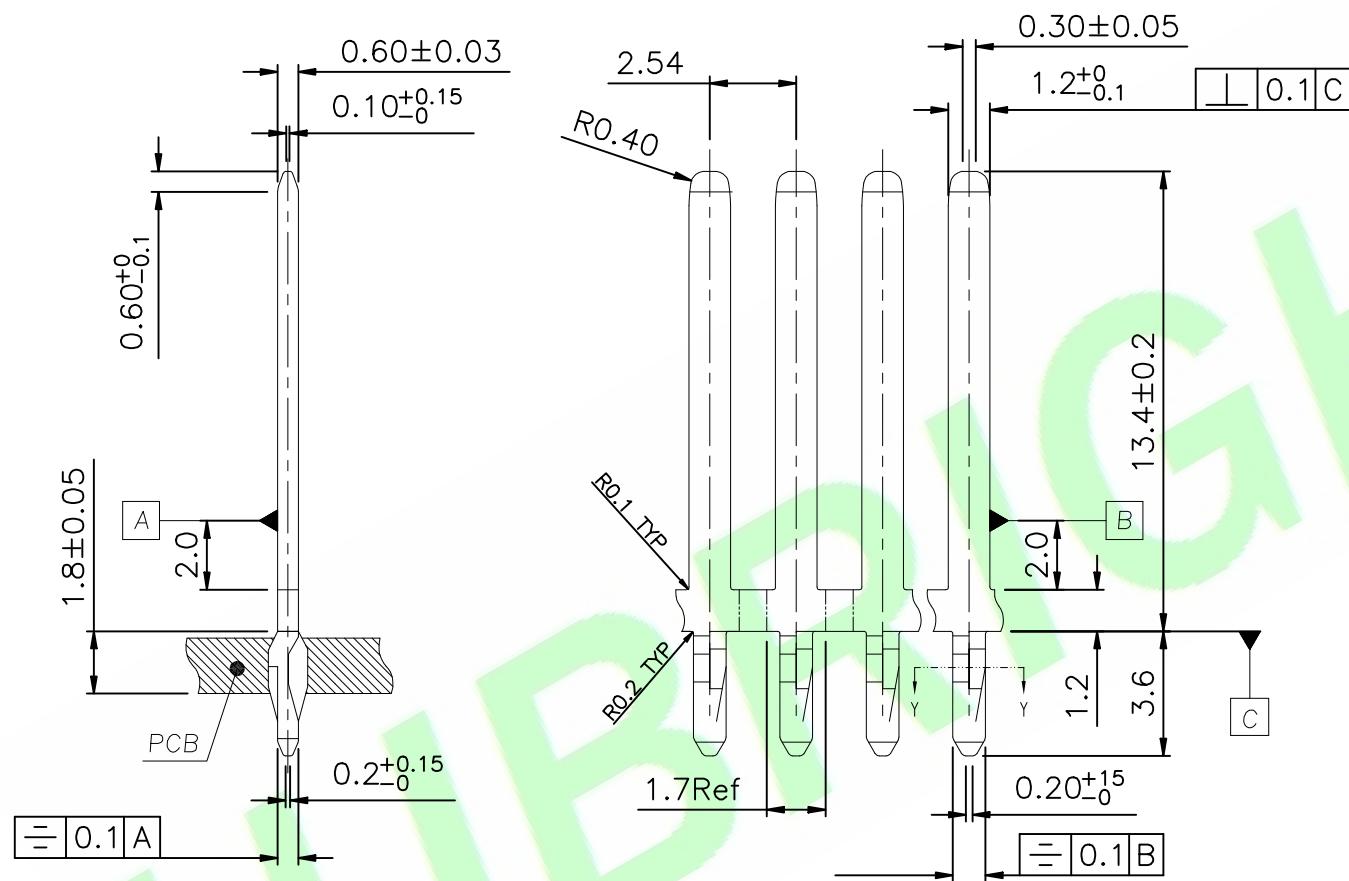

PACKED ON CARDBOARD REEL
REEL UNIT 50.000 PIECES
REEL- $\phi 600\text{mm}$ / $\phi 588\text{mm}$

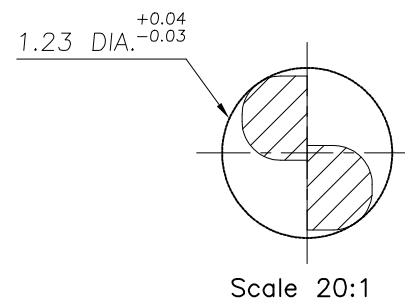

ROTATION PERMITTED
VERDREHUNG ERLAUBT

PRESS-IN AREA FOR 1.6mm PCB
REQUIREMENTS FOR PCB HOLE
PLATED HOLE:


DRILL- ϕ : 1.15 ± 0.025
FINISHED HOLE- ϕ : $0.94 \sim 1.09$
Cu-THICKNESS: $25 \sim 75 \mu\text{m}$
SnPb-THICKNESS: $4 \sim 10 \mu\text{m}$

1X	ORIGINAL	Judyann	
REV.	DESCRIPTION	DR.BY	ECN. NO.

DR.BY.: Mark	GENERAL TOLERANCE:		PART NO : Y060L250-1700-TA
	LINEAR	ANGLES	DWG. NO.:
CHKD.: Tony	x.: ±0.30	x': ±3.0°	TITLE : 0.60mm fisheye needle
	x.x: ±0.25	x.x': ±2.0°	
APPD.: Billy	x.xx: ±0.10	x.xx': ±1.0°	
	x.xxx: ±0.03	x.xxx':	
			DATE: 2-Sep-2021

HJBRIGHT® 东莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
SCALE: 1:1
UNIT: mm



THIRD ANGLE PROJECTION

A4