


HJBRIGHT[®]

MicroBridge

1.270mm Connectors

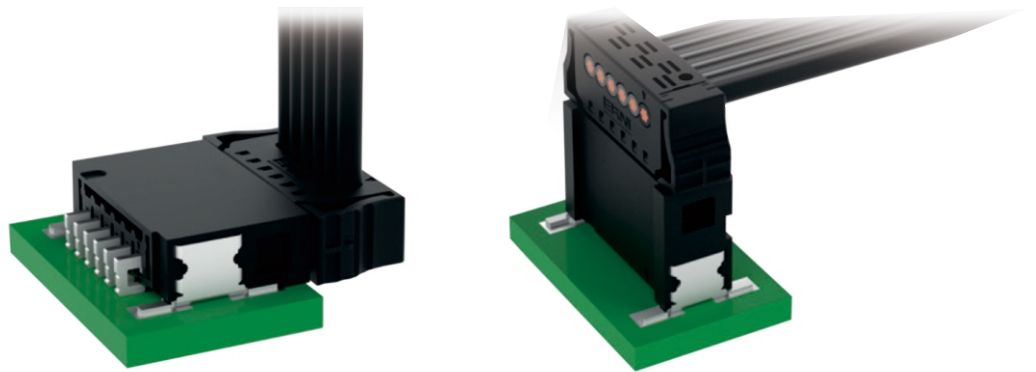

东莞市华晶电子有限公司
<http://www.hjbright.com>

1.270mm Connectors

Specifications:

Material And Finish:

Insulator:LCP UL94V-0

Contact:Copper alloy

Plated:See Ordering Information

Rating:


Voltage Rating:250V AC/DC

Operating Temperature Range:LCP:-40°~+150°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.





Ordering Information

M1270M-02X-XX-F

1 2 3 4 5 6

- 1: — Series No.
- 2: — M: SMT Type
- 3: — No. of Positions
- 4: — S: Matte Tin Plated
H: Gold flash on contact;
Matte Tin on tail
- 5: — 01: A Type Red
02: B Type Green
03: C Type Blue
04: D Type Black
- 6: — F: W/Cap In Tape & Reel

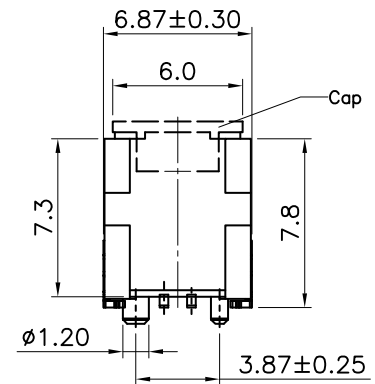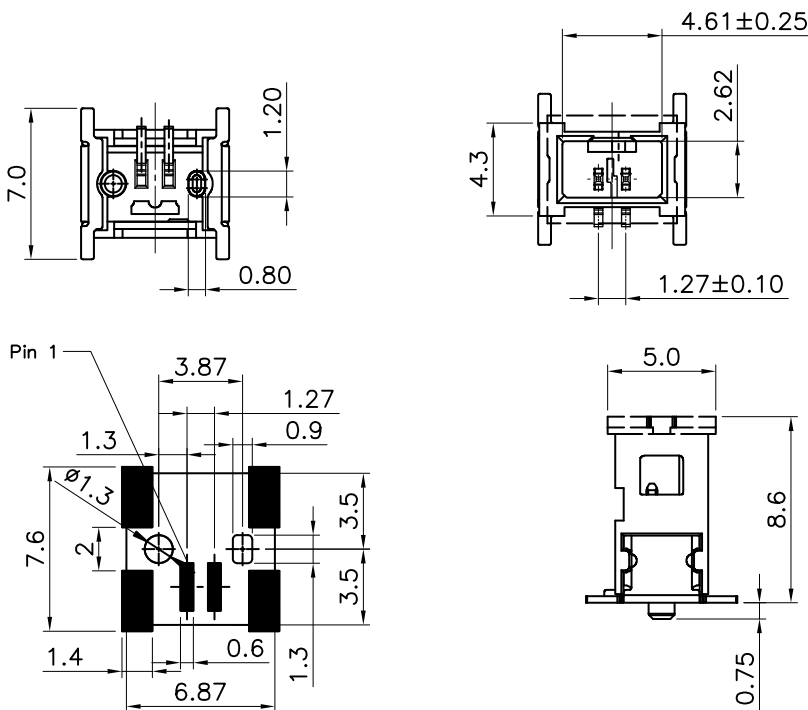

A Type Red	B Type Green	C Type Blue	D Type Black
0.60	0.60	0.30	0.30

1.270mm Connectors

Specifications:
Material And Finish:
Insulator:LCP UL94V-0
Contact:Copper alloy
Plated:See Ordering Information





Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:LCP:-40°~+150°C

Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.



Ordering Information
M1270H-02X-XX-G
1 2 3 4 5 6

- 1:— Series No.
- 2:— H:Horizontal SMT Type
- 3:— No. of Positions
- 4:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
- 5:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 6:— G:Tape&Reel

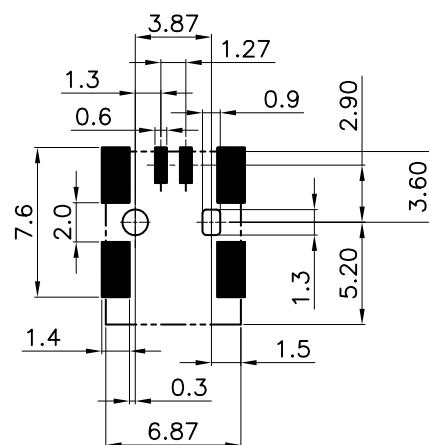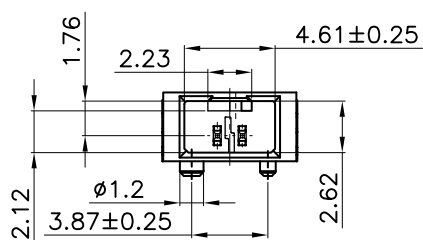


A Type Red	B Type Green	C Type Blue	D Type Black
0.60	0.60	0.30	0.30

1.270mm Connectors

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0
Contact:Copper alloy

Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+150°C

Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.






Ordering Information


M1270-02X-XX-AA
1 2 3 4 5 6

- 1:— Series No.
- 2:— No. of Positions
- 3:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
- 4:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 5:— A:90 Degree
- 6:— A:In Bag


with opening cable guide mounted
(state at time of supply)

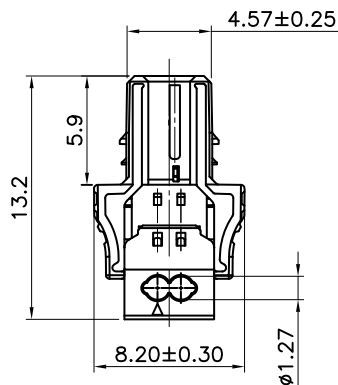

cable guide pressed on



contact marking

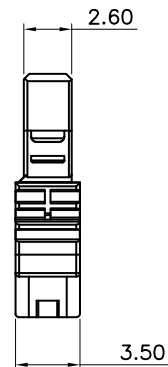

A Type Red	B Type Green	C Type Blue	D Type Black
 0.62	 0.62	 0.30	 0.30

1.270mm Connectors

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0
Contact:Copper alloy

Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+150°C





Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.



Ordering Information
M1270-02X-XX-BA
1 2 3 4 5 6

- 1:— Series No.
- 2:— No. of Positions
- 3:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tai
- 4:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 5:— B:180 Degree
- 6:— A:In Bag

with opening cable guide mounted
(state at time of supply)

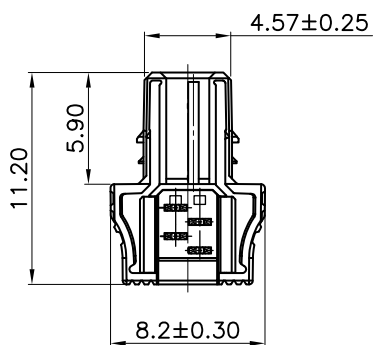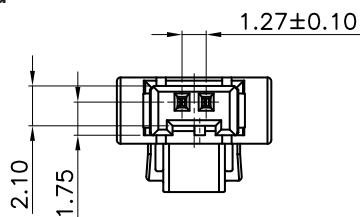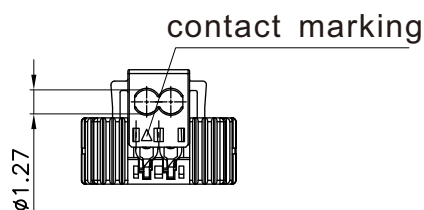

cable guide pressed on


A Type Red	B Type Green	C Type Blue	D Type Black
 0.62	 0.62	 0.30	 0.30

1.270mm Connectors

Specifications:
Material And Finish:
Insulator:LCP UL94V-0
Contact:Copper alloy
Plated:See Ordering Information



Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:LCP:-40°~+150°C

Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.



Ordering Information
M1270M-04X-XX-F
1 2 3 4 5 6

- 1:— Series No.
- 2:— M:SMT Type
- 3:— No. of Positions
- 4:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
- 5:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 6:— F:W/Cap In Tape&Reel

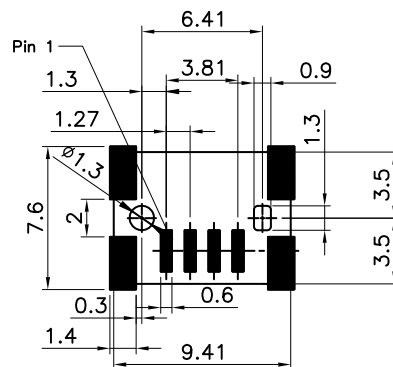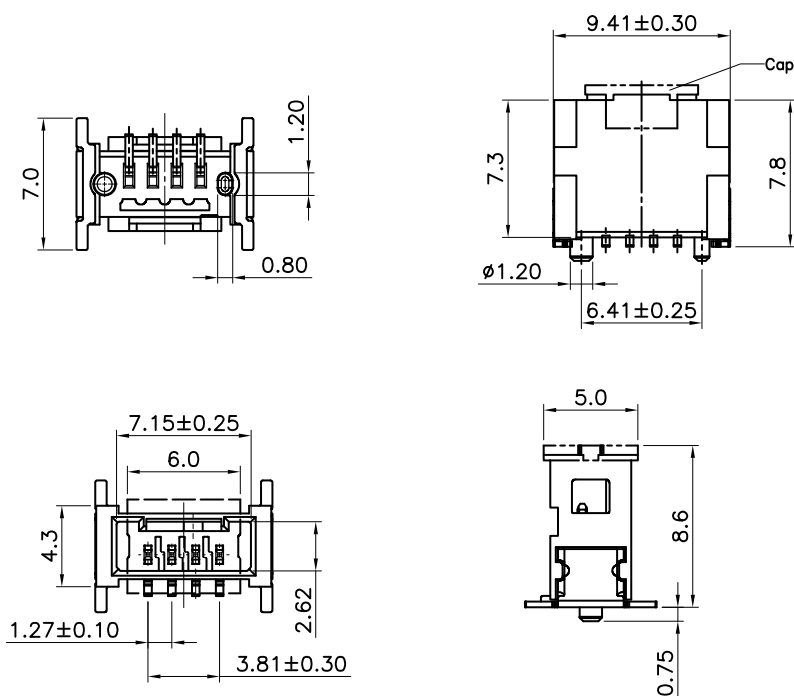

A Type Red	B Type Green	C Type Blue	D Type Black

1.270mm Connectors

Specifications:
 Material And Finish:
 Insulator:LCP UL94V-0
 Contact:Copper alloy
 Plated:See Ordering Information

Rating:
 Voltage Rating:250V AC/DC
 Operating Temperature Range:LCP:-40°~+150°C

Electrical:
 Contact resistance:5m Ohm Max
 Insulator resistance:100M ohm min.







Ordering Information

M1270H-04X-XX-G

1 2 3 4 5 6

- 1:— Series No.
 2:— H:Horizontal SMT Type
 3:— No. of Positions
 4:— S:Matte Tin Plated
 H:Gold flash on contact;
 Matte Tin on tail
 5:— 01:A Type Red
 02:B Type Green
 03:C Type Blue
 04:D Type Black
 6:— G:Tape&Reel

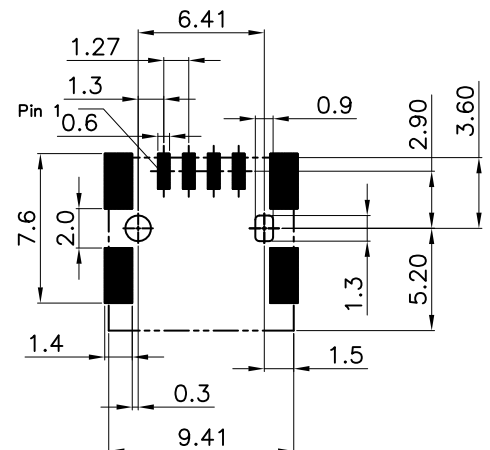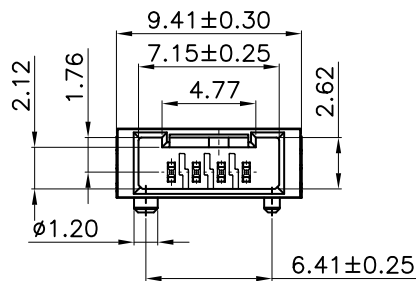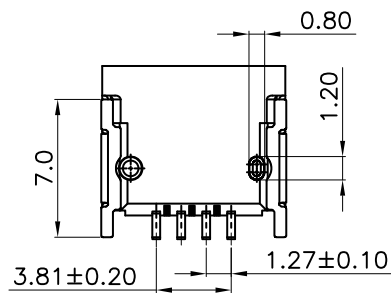


A Type Red	B Type Green	C Type Blue	D Type Black

1.270mm Connectors

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0
Contact:Copper alloy

Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+150°C




Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.




Ordering Information
M1270-04X-XX-AA
1 2 3 4 5 6

- 1:— Series No.
2:— No. of Positions
3:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
4:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
5:— A:90 Degree
6:— A:In Bag


with opening cable guide mounted
(state at time of supply)


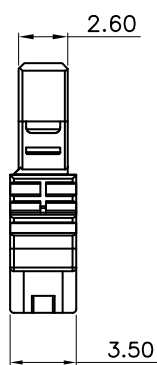
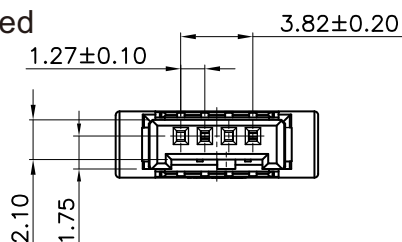



cable guide pressed on



contact marking

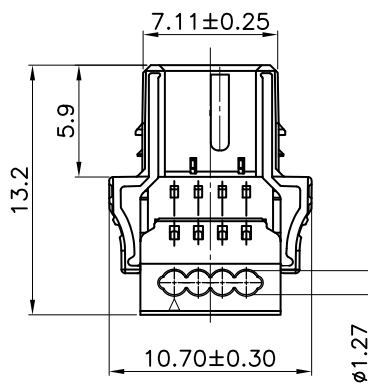

A Type Red	B Type Green	C Type Blue	D Type Black
			

1.270mm Connectors

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0
Contact:Copper alloy


Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+150°C

Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.






Ordering Information
M1270-04X-XX-BA
1 2 3 4 5 6

- 1:— Series No.
2:— No. of Positions
3:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tai
4:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
5:— B:180 Degree
6:— A:In Bag

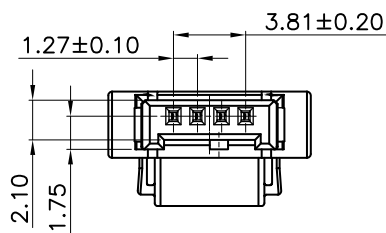

with opening cable guide mounted
(state at time of supply)

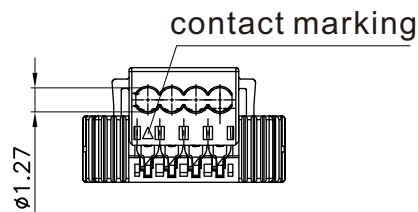

cable guide pressed on

A Type Red	B Type Green	C Type Blue	D Type Black

1.270mm Connectors

Specifications:

Material And Finish:

Insulator:LCP UL94V-0

Contact:Copper alloy

Plated:See Ordering Information

Rating:

Voltage Rating:250V AC/DC

Operating Temperature Range:LCP:-40°~+150°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.








Ordering Information

M1270M-05X-XX-F

1 2 3 4 5 6

- 1:— Series No.
- 2:— M:SMT Type
- 3:— No. of Positions
- 4:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
- 5:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 6:— F:W/Cap In Tape&Reel

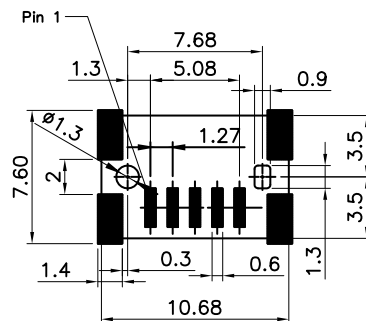

A Type Red	B Type Green	C Type Blue	D Type Black

1.270mm Connectors




Specifications:
 Material And Finish:
 Insulator:LCP UL94V-0
 Contact:Copper alloy
 Plated:See Ordering Information

Rating:
 Voltage Rating:250V AC/DC
 Operating Temperature Range:LCP:-40°~+150°C

Electrical:
 Contact resistance:5m Ohm Max
 Insulator resistance:100M ohm min.

Ordering Information
 M1270H-05X-XX-G
 1 2 3 4 5 6

1:— Series No.
 2:— H:Horizontal SMT Type
 3:— No. of Positions
 4:— S:Matte Tin Plated
 H:Gold flash on contact;
 Matte Tin on tail
 5:— 01:A Type Red
 02:B Type Green
 03:C Type Blue
 04:D Type Black
 6:— G:Tape&Reel

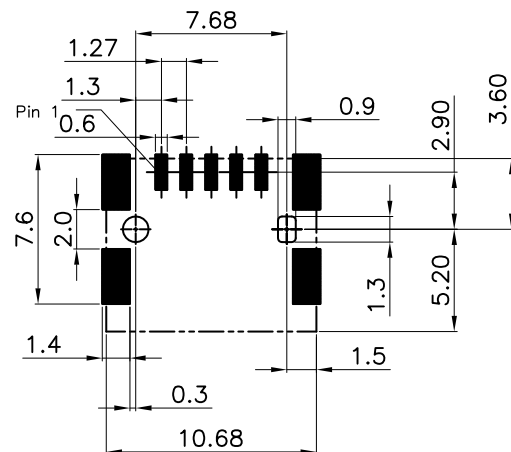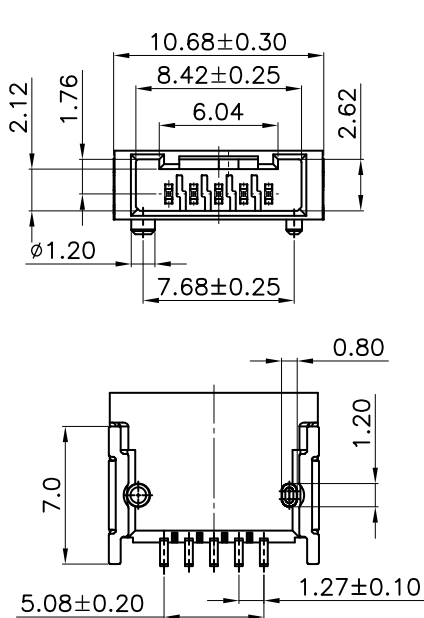


A Type Red	B Type Green	C Type Blue	D Type Black

1.270mm Connectors

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0
Contact:Copper alloy

Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+150°C

Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.





Ordering Information
M1270-05X-XX-AA


1 2 3 4 5 6

- 1:— Series No.
- 2:— No. of Positions
- 3:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
- 4:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 5:— A:90 Degree
- 6:— A:In Bag



with opening cable guide mounted
(state at time of supply)



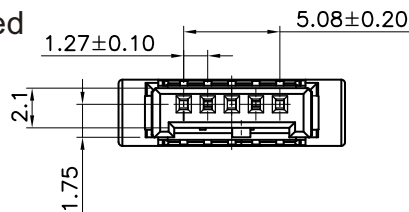



cable guide pressed on



contact marking

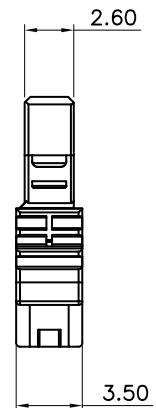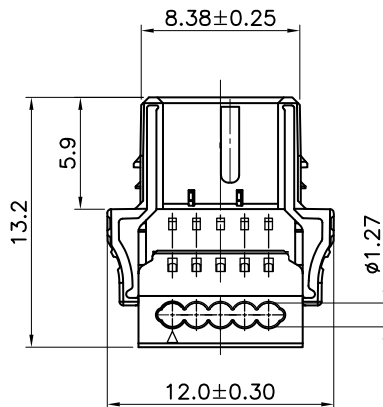

A Type Red	B Type Green	C Type Blue	D Type Black
			

1.270mm Connectors

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0
Contact:Copper alloy

Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+150°C





Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.



Ordering Information
M1270-05X-XX-BA
1 2 3 4 5 6

- 1:— Series No.
- 2:— No. of Positions
- 3:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tai
- 4:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 5:— B:180 Degree
- 6:— A:In Bag

with opening cable guide mounted
(state at time of supply)

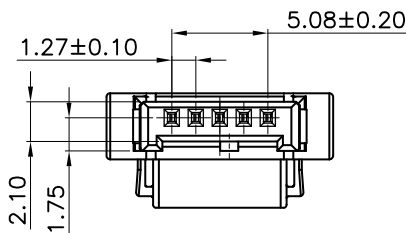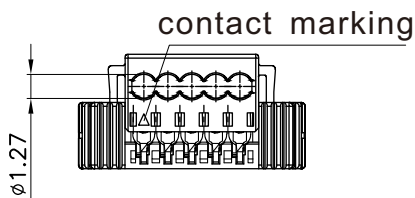

cable guide pressed on

A Type Red	B Type Green	C Type Blue	D Type Black

1.270mm Connectors

Specifications:

Material And Finish:

Insulator:LCP UL94V-0

Contact:Copper alloy

Plated:See Ordering Information

Rating:

Voltage Rating:250V AC/DC

Operating Temperature Range:LCP:-40°~+150°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.












Ordering Information

M1270M-06X-XX-F

1 2 3 4 5 6

- 1:— Series No.
- 2:— M:SMT Type
- 3:— No. of Positions
- 4:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
- 5:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 6:— F:W/Cap In Tape&Reel

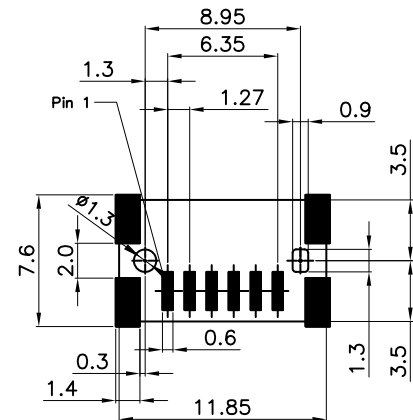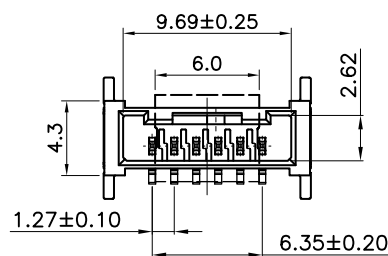

A Type Red	B Type Green	C Type Blue	D Type Black
			

1.270mm Connectors

Specifications:
 Material And Finish:
 Insulator:LCP UL94V-0
 Contact:Copper alloy
 Plated:See Ordering Information





Rating:
 Voltage Rating:250V AC/DC
 Operating Temperature Range:LCP:-40°~+150°C

Electrical:
 Contact resistance:5m Ohm Max
 Insulator resistance:100M ohm min.



Ordering Information
 M1270H-06X-XX-G
 1 2 3 4 5 6

- 1:— Series No.
- 2:— H:Horizontal SMT Type
- 3:— No. of Positions
- 4:— S:Matte Tin Plated
 H:Gold flash on contact;
 Matte Tin on tail
- 5:— 01:A Type Red
 02:B Type Green
 03:C Type Blue
 04:D Type Black
- 6:— G:Tape&Reel

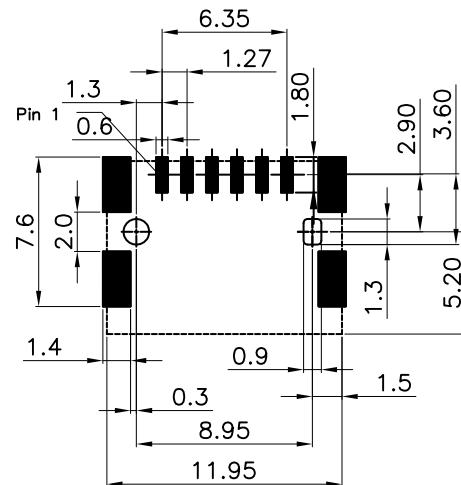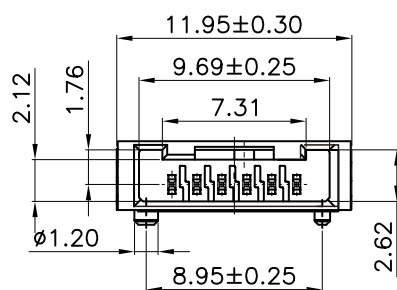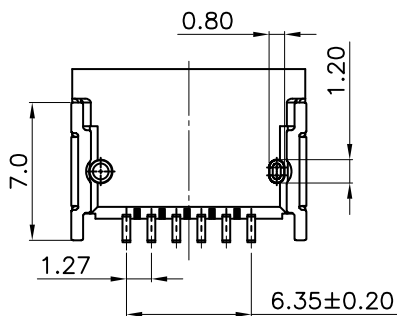

A Type Red	B Type Green	C Type Blue	D Type Black

1.270mm Connectors

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0
Contact:Copper alloy

Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+150°C



Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.




Ordering Information
M1270-06X-XX-AA
1 2 3 4 5 6

- 1:— Series No.
- 2:— No. of Positions
- 3:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
- 4:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 5:— A:90 Degree
- 6:— A:In Bag



with opening cable guide mounted
(state at time of supply)



cable guide pressed on



contact marking

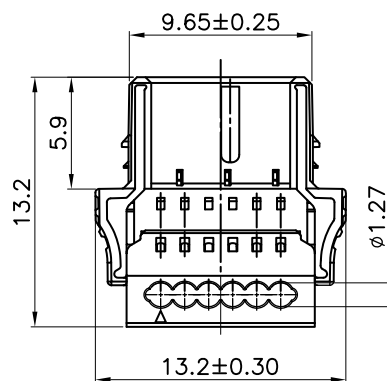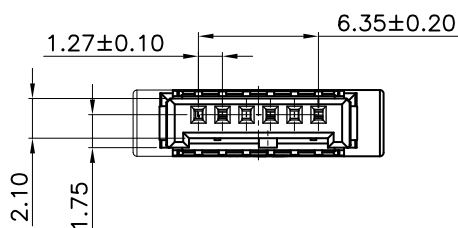

A Type Red	B Type Green	C Type Blue	D Type Black
 1.50	 1.50	 0.50	 0.50

1.270mm Connectors

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Contact:Copper alloy

Rating:

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+150°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.





Ordering Information

M1270-06X-XX-BA


1 2 3 4 5 6





- 1:— Series No.
- 2:— No. of Positions
- 3:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tai
- 4:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 5:— B:180 Degree
- 6:— A:In Bag

with opening cable guide mounted
(state at time of supply)

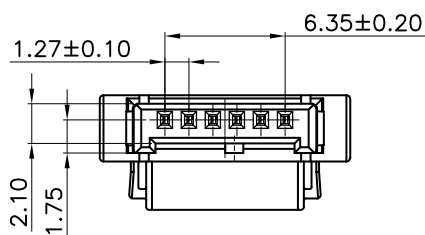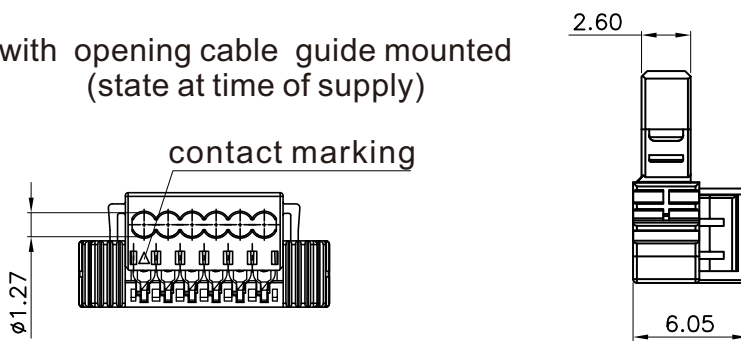

cable guide pressed on



A Type Red	B Type Green	C Type Blue	D Type Black
			

1.270mm Connectors

Specifications:
 Material And Finish:
 Insulator:LCP UL94V-0
 Contact:Copper alloy
 Plated:See Ordering Information






Rating:
 Voltage Rating:250V AC/DC
 Operating Temperature Range:LCP:-40°~+125°C

Electrical:
 Contact resistance:5m Ohm Max
 Insulator resistance:100M ohm min.



Ordering Information
 M1270M-08X-XX-F
 1 2 3 4 5 6

- 1:— Series No.
- 2:— M:SMT Type
- 3:— No. of Positions
- 4:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
- 5:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 6:— F:W/Cap In Tape&Reel

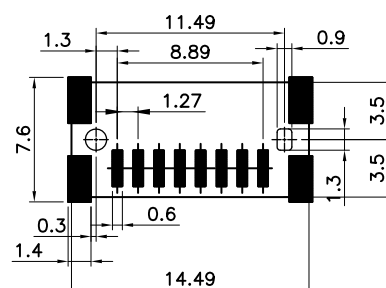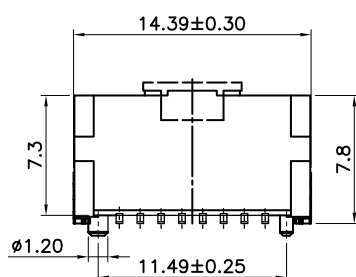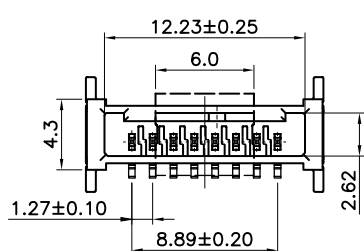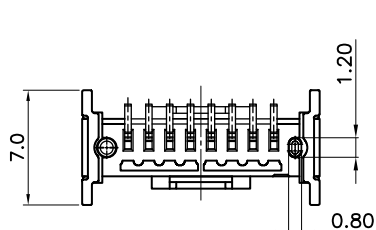

A Type Red	B Type Green	C Type Blue	D Type Black

1.270mm Connectors

Specifications:
Material And Finish:
Insulator:LCP UL94V-0
Contact:Copper alloy
Plated:See Ordering Information


Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:LCP:-40°~+125°C





Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.



Ordering Information
M1270H-08X-XX-G
1 2 3 4 5 6

- 1:— Series No.
2:— H:Horizontal SMT Type
3:— No. of Positions
4:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
5:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
6:— G:Tape&Reel

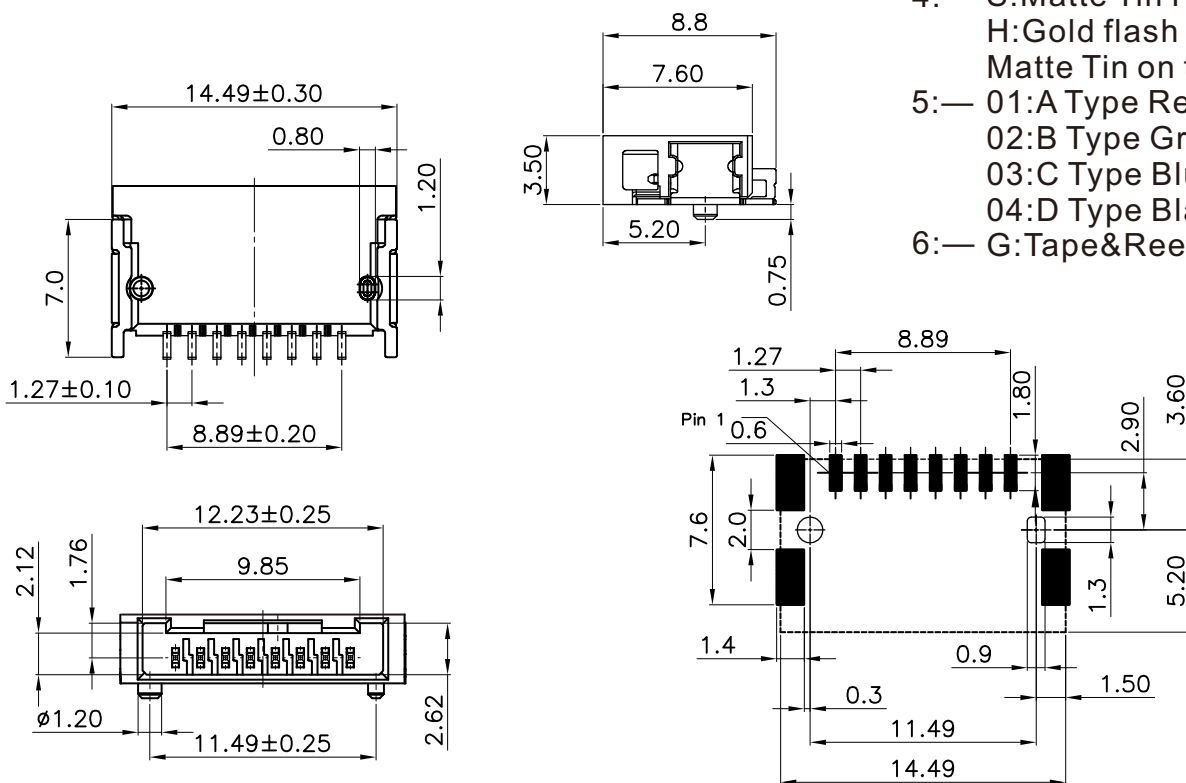


A Type Red	B Type Green	C Type Blue	D Type Black
			

1.270mm Connectors

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0
Contact:Copper alloy

Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+150°C



Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.




Ordering Information
M1270-08X-XX-AA
1 2 3 4 5 6

- 1:— Series No.
- 2:— No. of Positions
- 3:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
- 4:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 5:— A:90 Degree
- 6:— A:In Bag



with opening cable guide mounted
(state at time of supply)



cable guide pressed on

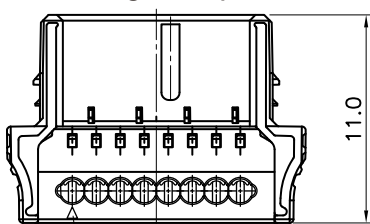

contact marking

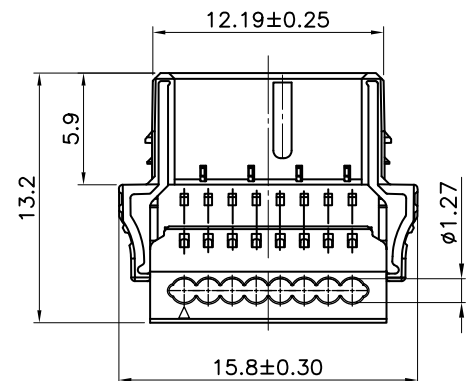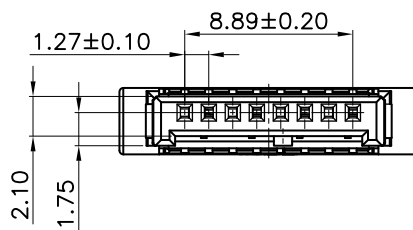

A Type Red	B Type Green	C Type Blue	D Type Black
 2.25	 2.25	 0.75	 0.75

1.270mm Connectors

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0
Contact:Copper alloy

Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+150°C





Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.







Ordering Information
M1270-08X-XX-BA
1 2 3 4 5 6

- 1:— Series No.
2:— No. of Positions
3:— S:Matte Tin Plated
H:Gold flash on contact;
MatteTin on tai
4:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
5:— B:180 Degree
6:— A:In Bag

with opening cable guide mounted
(state at time of supply)

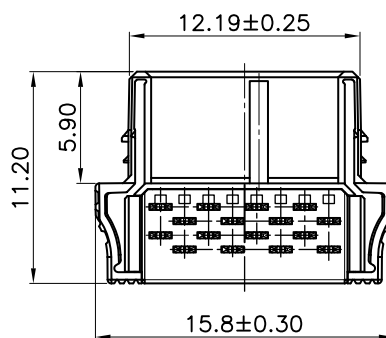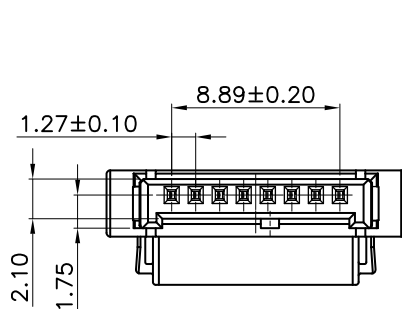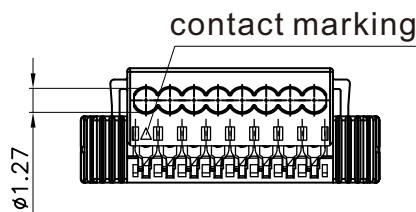

cable guide pressed on

A Type Red	B Type Green	C Type Blue	D Type Black
			

1.270mm Connectors

Specifications:
 Material And Finish:
 Insulator:LCP UL94V-0
 Contact:Copper alloy
 Plated:See Ordering Information











Rating:
 Voltage Rating:250V AC/DC
 Operating Temperature Range:LCP:-40°~+125°C

Ordering Information
M1270H-09X-XX-G
 1 2 3 4 5 6

Electrical:
 Contact resistance:5m Ohm Max
 Insulator resistance:100M ohm min.

- 1:— Series No.
- 2:— H:Horizontal SMT Type
- 3:— No. of Positions
- 4:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
- 5:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 6:— G:Tape&Reel

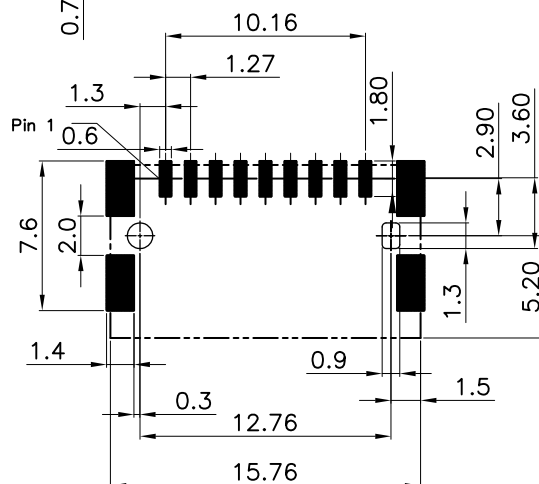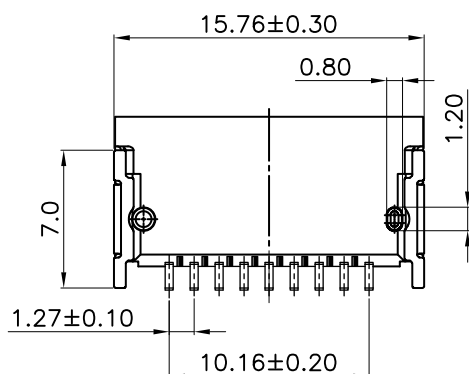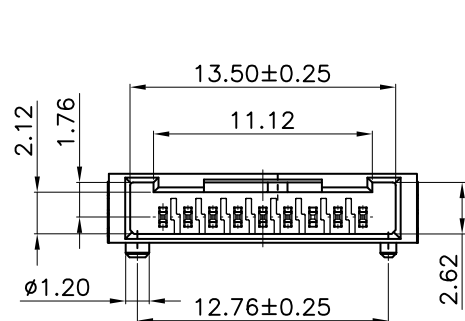

A Type Red	B Type Green	C Type Blue	D Type Black
			

1.270mm Connectors

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Contact:Copper alloy

Rating:

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+150°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.




Ordering Information

M1270-09X-XX-BA




1 2 3 4 5 6





- 1:— Series No.
- 2:— No. of Positions
- 3:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tai
- 4:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 5:— B:180 Degree
- 6:— A:In Bag

with opening cable guide mounted
(state at time of supply)

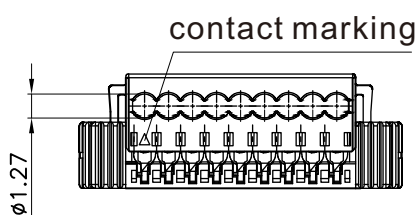

cable guide pressed on

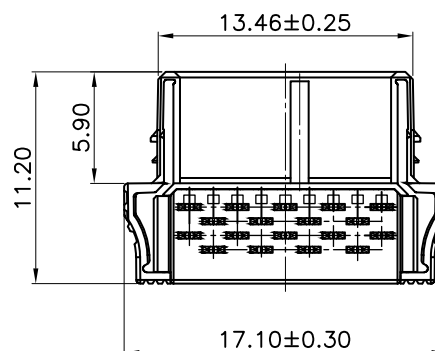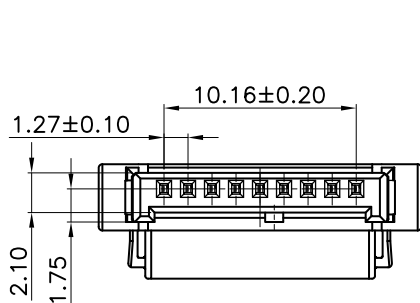

A Type Red	B Type Green	C Type Blue	D Type Black
			

1.270mm Connectors







Specifications:
 Material And Finish:
 Insulator:LCP UL94V-0
 Contact:Copper alloy
 Plated:See Ordering Information

Rating:
 Voltage Rating:250V AC/DC
 Operating Temperature Range:LCP:-40°~+125°C

Electrical:
 Contact resistance:5m Ohm Max
 Insulator resistance:100M ohm min.

Ordering Information
 M1270H-10X-XX-G
 1 2 3 4 5 6

- 1:— Series No.
- 2:— H:Horizontal SMT Type
- 3:— No. of Positions
- 4:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
- 5:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 6:— G:Tape&Reel

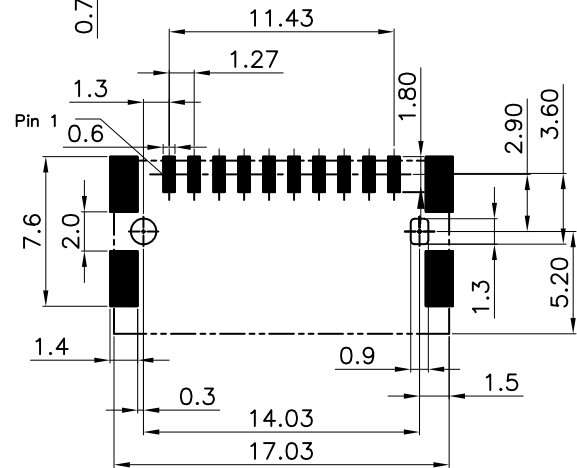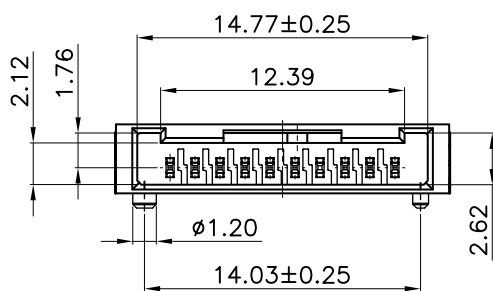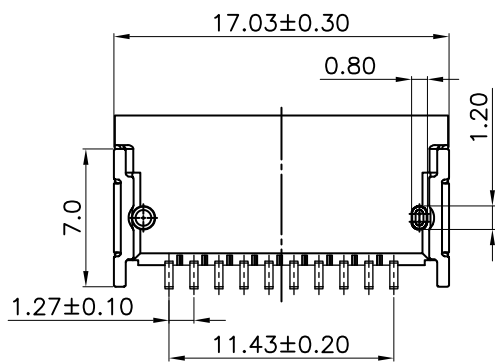


A Type Red	B Type Green	C Type Blue	D Type Black

1.270mm Connectors

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0

Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+125°C



Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.




Ordering Information
M1270-10X-XX-AA
1 2 3 4 5 6

- 1:— Series No.
- 2:— No. of Positions
- 3:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
- 4:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 5:— A:90 Degree
- 6:— A:In Bag


with opening cable guide mounted
(state at time of supply)

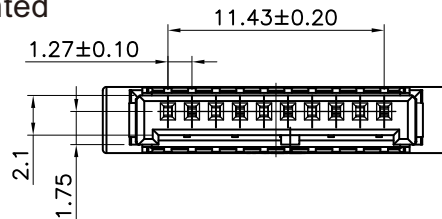



cable guide pressed on

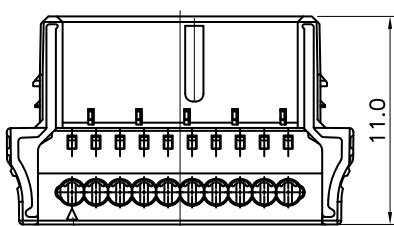

contact marking

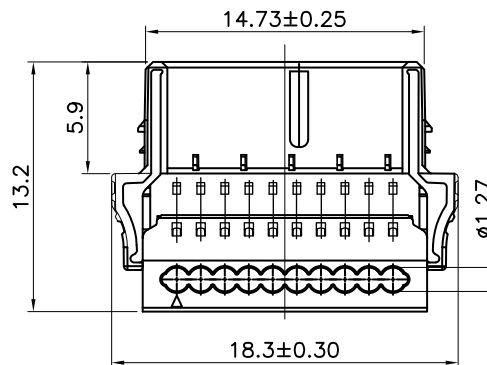

A Type Red	B Type Green	C Type Blue	D Type Black
			

1.270mm Connectors

Specifications:
Material And Finish:
Insulator:LCP UL94V-0
Contact:Copper alloy
Plated:See Ordering Information





Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:LCP:-40°~+125°C

Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.



Ordering Information
M1270H-12X-XX-G
1 2 3 4 5 6

- 1:— Series No.
2:— H:Horizontal SMT Type
3:— No. of Positions
4:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
5:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
6:— G:Tape&Reel

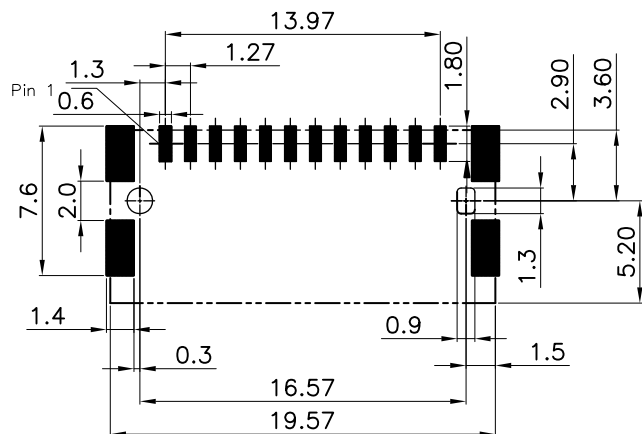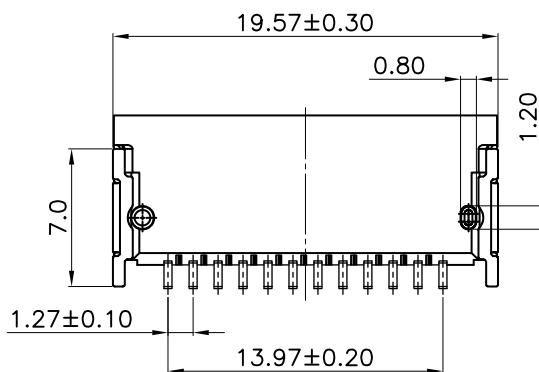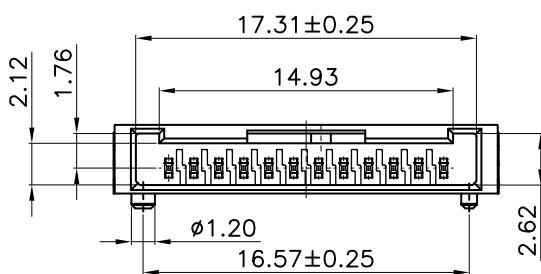

A Type Red	B Type Green	C Type Blue	D Type Black

1.270mm Connectors

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Contact:Copper alloy

Rating:

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+150°C

Electrical:

Contact resistance:5m Ohm Max


Insulator resistance:100M ohm min.




Ordering Information
M1270-12X-XX-AA
1 2 3 4 5 6

- 1:— Series No.
- 2:— No. of Positions
- 3:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
- 4:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 5:— A:90 Degree
- 6:— A:In Bag

with opening cable guide mounted
(state at time of supply)

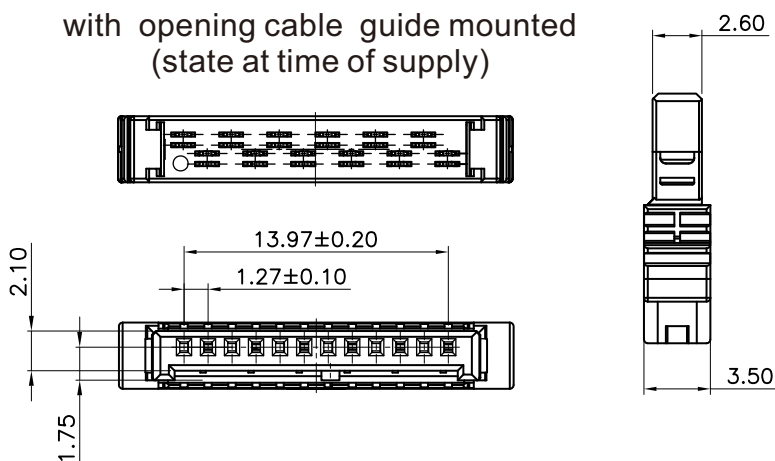

cable guide pressed on

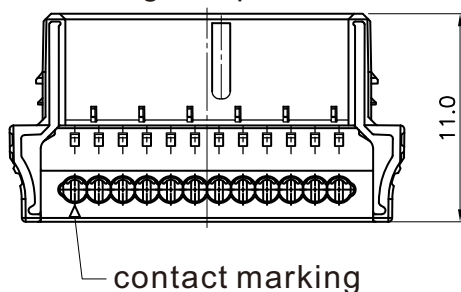

contact marking

A Type Red	B Type Green	C Type Blue	D Type Black

1.270mm Connectors





Specifications:
Material And Finish:
Insulator:LCP UL94V-0
Contact:Copper alloy
Plated:See Ordering Information

Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:LCP:-40°~+125°C

Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.

Ordering Information
M1270H-14X-XX-G
1 2 3 4 5 6

- 1:— Series No.
2:— H:Horizontal SMT Type
3:— No. of Positions
4:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tail
5:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
6:— G:Tape&Reel

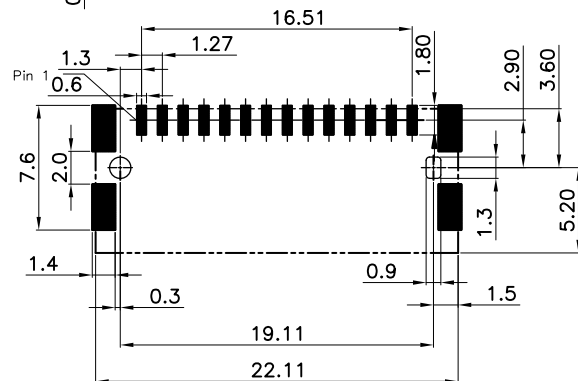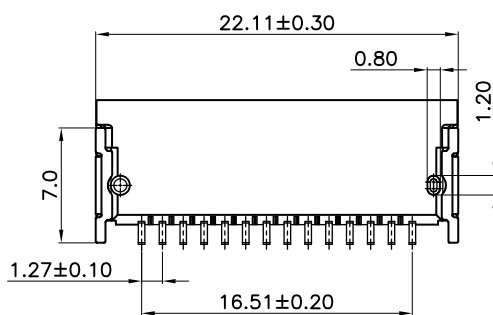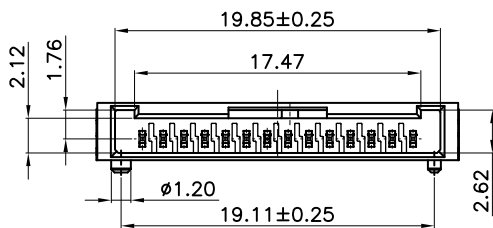

A Type Red	B Type Green	C Type Blue	D Type Black

1.270mm Connectors

Specifications:

Material And Finish:

Insulator:PA46 UL94V-0

Contact:Copper alloy

Rating:


Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+150°C

Electrical:

Contact resistance:5m Ohm Max

Insulator resistance:100M ohm min.



Ordering Information
M1270-14X-XX-AA

1 2 3 4 5 6

1:— Series No.

2:— No. of Positions

3:— S:Matte Tin Plated

H:Gold flash on contact;
Matte Tin on tail

4:— 01:A Type Red

02:B Type Green



03:C Type Blue

04:D Type Black


5:— A:90 Degree

6:— A:In Bag



with opening cable guide mounted
(state at time of supply)

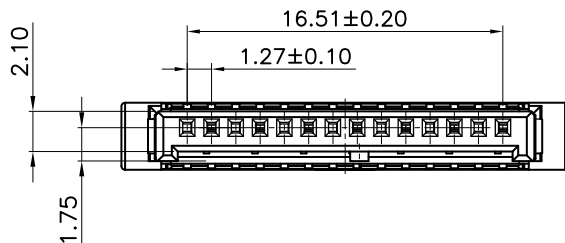


cable guide pressed on

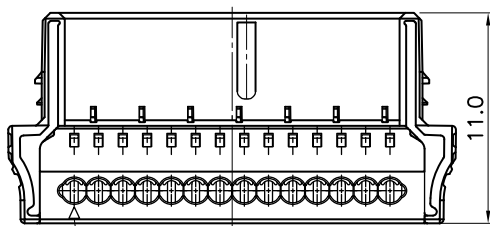

contact marking

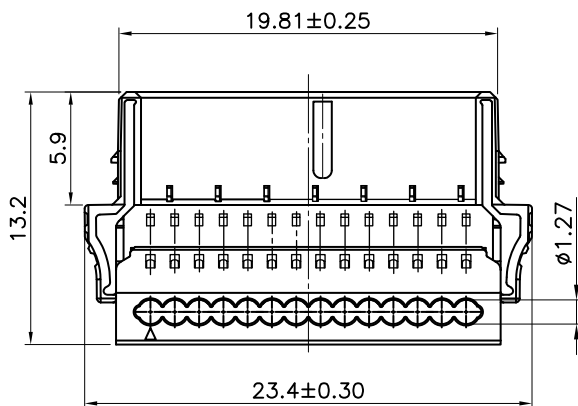

A Type Red	B Type Green	C Type Blue	D Type Black
			

1.270mm Connectors

Specifications:
 Material And Finish:
 Insulator:LCP UL94V-0
 Contact:Copper alloy
 Plated:See Ordering Information





Rating:
 Voltage Rating:250V AC/DC
 Operating Temperature Range:LCP:-40°~+125°C

Electrical:
 Contact resistance:5m Ohm Max
 Insulator resistance:100M ohm min.



Ordering Information
 M1270H-16X-XX-G
 1 2 3 4 5 6

- 1:— Series No.
 2:— H:Horizontal SMT Type
 3:— No. of Positions
 4:— S:Matte Tin Plated
 H:Gold flash on contact;
 Matte Tin on tail
 5:— 01:A Type Red
 02:B Type Green
 03:C Type Blue
 04:D Type Black
 6:— G:Tape&Reel

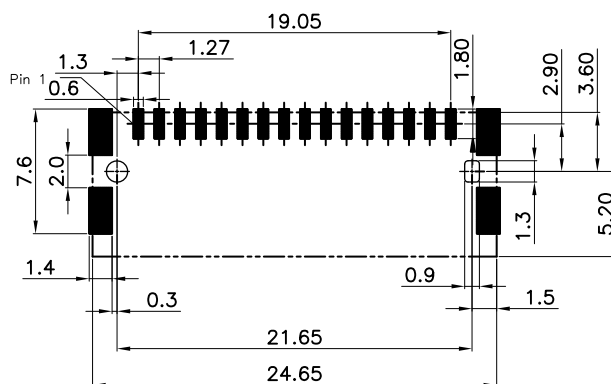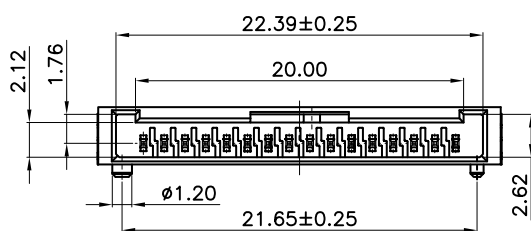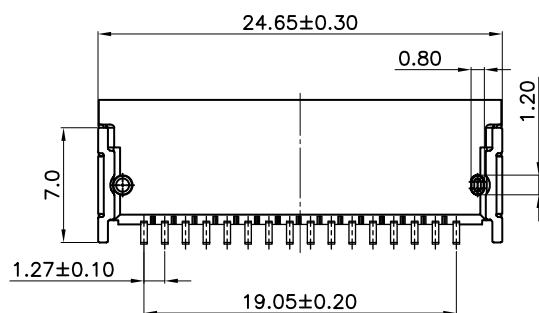

A Type Red	B Type Green	C Type Blue	D Type Black

1.270mm Connectors

Specifications:
Material And Finish:
Insulator:PA46 UL94V-0
Contact:Copper alloy

Rating:
Voltage Rating:250V AC/DC
Operating Temperature Range:-40°~+150°C






Electrical:
Contact resistance:5m Ohm Max
Insulator resistance:100M ohm min.



Ordering Information
M1270-16X-XX-BA
1 2 3 4 5 6

- 1:— Series No.
- 2:— No. of Positions
- 3:— S:Matte Tin Plated
H:Gold flash on contact;
Matte Tin on tai
- 4:— 01:A Type Red
02:B Type Green
03:C Type Blue
04:D Type Black
- 5:— B:180 Degree
- 6:— A:In Bag

with opening cable guide mounted
(state at time of supply)

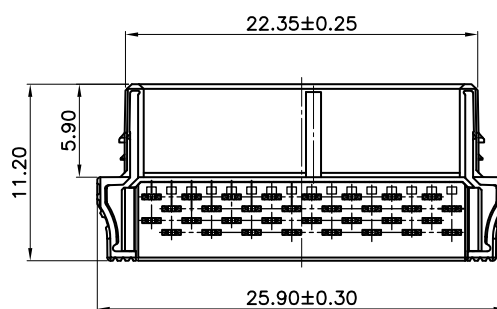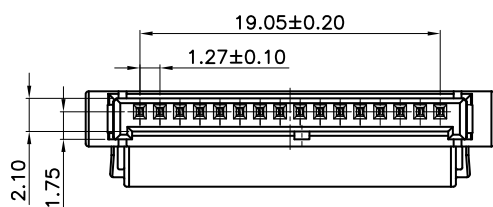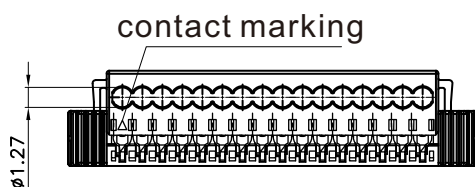

A Type Red	B Type Green	C Type Blue	D Type Black
 2.25	 2.25	 0.75	 0.75

HJBRIGHT[®]



Professional connector and wiring harness manufacturer

东莞市华晶电子有限公司

地址:广东省东莞市常平镇黄泥塘禾石路1号3栋

DDR:Building 3, No.1 Heshi Road, Huangnitang, Changping Town, Dongguan, Guangdong

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

DDR:Rm. 1105, Lippo Centre Tower 1, 89 Queensway, Admiralty, Hong Kong.

地址: 香港金钟道89号力宝中心第一座11楼1105室

E-mail:billy@hjbright.com

PHONE:18819764786

TEL:0769-81089582

FAX:0769-81089581