
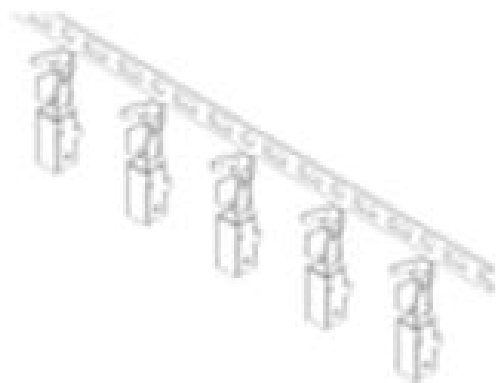



.098''(2.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.098''(2.50mm) Connectors



.098" (2.50mm) Pitch Terminal

Specifications:

Material And Finish:

Insulator:

Contact: Copper alloy

Plated: See Ordering Information

Rating:

Current Rating: 5.0 Amp

Voltage Rating: 250V AC/DC

Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 1500V AC/Minute

HJBRIGHT®

Ordering Information

H25080T-PX-01

1 2 3


1:—Series No.

2:—T: Terminal

3:—A: Gold flash

Q: Tin Plated

S: Matte Tin Plated

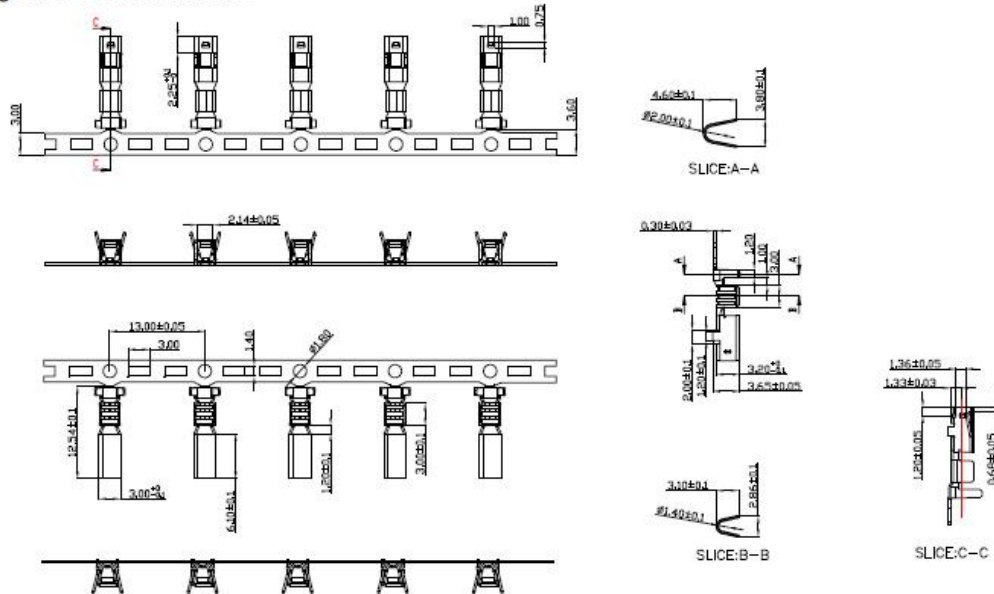

Specifications:

Material And Finish:

Insulator:

Contact: Copper alloy

Plated: See Ordering Information

Rating:

Current Rating: 5.0 Amp

Voltage Rating: 250V AC/DC

Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 1500V AC/Minute

Ordering Information

H25080T-PX-02

1 2 3


1:—Series No.

2:—T: Terminal

3:—A: Gold flash

Q: Tin Plated

S: Matte Tin Plated

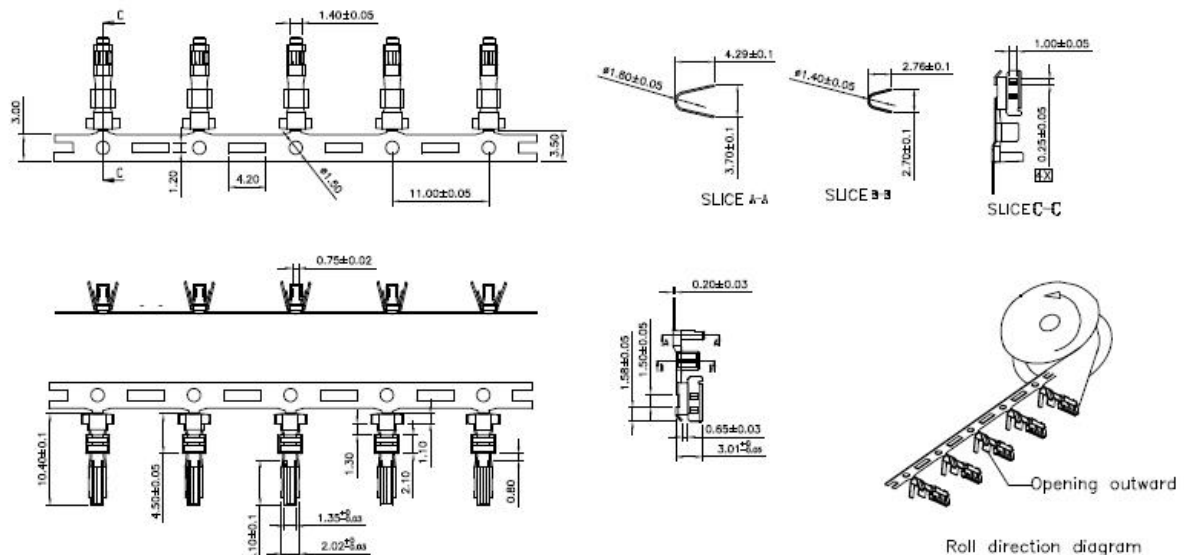

东莞市华晶电子有限公司
http://www.hjbright.com