


.098''(2.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.098''(2.50mm) Connectors

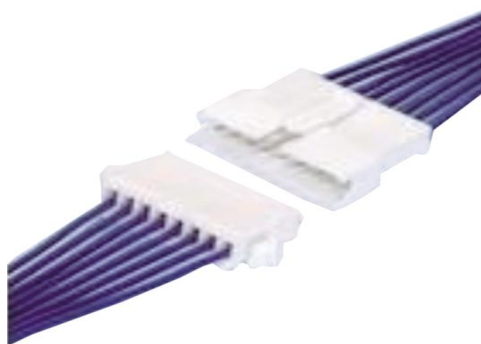

.098" (2.50mm) Pitch Wafer

Specifications:

Material:

Insulator:PA66 UL94V-0

Rating:

Current Rating:3.0 Amp(22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:1500V AC/Minute

Female shell with male terminal



Ordering Information

H2513F-XXP-XA

1 2 3 4 5

1:—Series No.



2:—F:Female Housing

3:—No. of Positions

4:—W:White

B:Black

5:—A:Bag

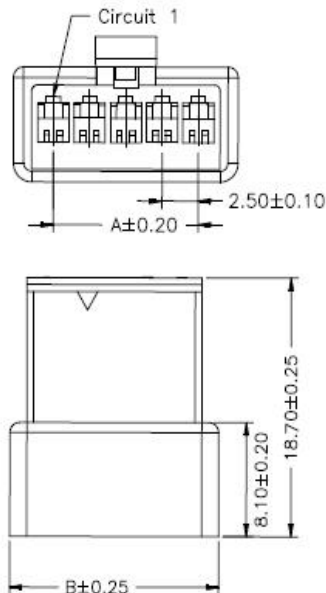

Circuits	Dimension mm	
	A	B
02	2.50	5.50
03	5.00	8.00
04	7.50	10.50
05	10.00	13.00
06	12.50	15.50
07	15.00	18.00
08	17.50	20.50
09	20.00	23.00
10	22.50	25.50
11	25.00	28.00
12	27.50	30.50
15	35.00	38.00

Specifications:

Material:

Insulator:PA66 UL94V-0

Rating:

Current Rating:3.0 Amp(22AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:1500V AC/Minute

Male rubber shell with female terminal



Ordering Information

H2513M-XXP-XA

1 2 3 4 5

1:—Series No.



2:—M:Male Housing

3:—No. of Positions

4:—W:White

B:Black

5:—A:Bag

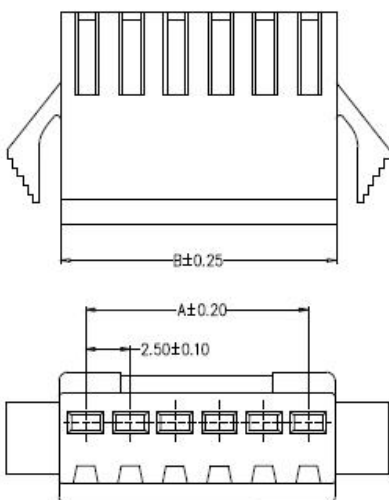

Circuits	Dimension mm	
	A	B
02	2.50	5.50
03	5.00	8.00
04	7.50	10.50
05	10.00	13.00
06	12.50	15.50
07	15.00	18.00
08	17.50	20.50
09	20.00	23.00
10	22.50	25.50
11	25.00	28.00
12	27.50	30.50
15	35.00	38.00

.098" (2.50mm) Pitch Terminal

Specifications:

Material: Phosphoric copper

Applicable wire sizes: AWG#22~28#

Rating:

Current Rating: 3.0 Amp (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 500M ohm min.

Withstanding Voltage: 1500V AC/Minute


Male terminal with female plastic shell

HJBRIGHT®

Ordering Information

H2513TM-PQ
1 2 3 4

- 1:—Series No.
2:—T:Terminal
3:—M:Male
4:—Q:Plated Tin

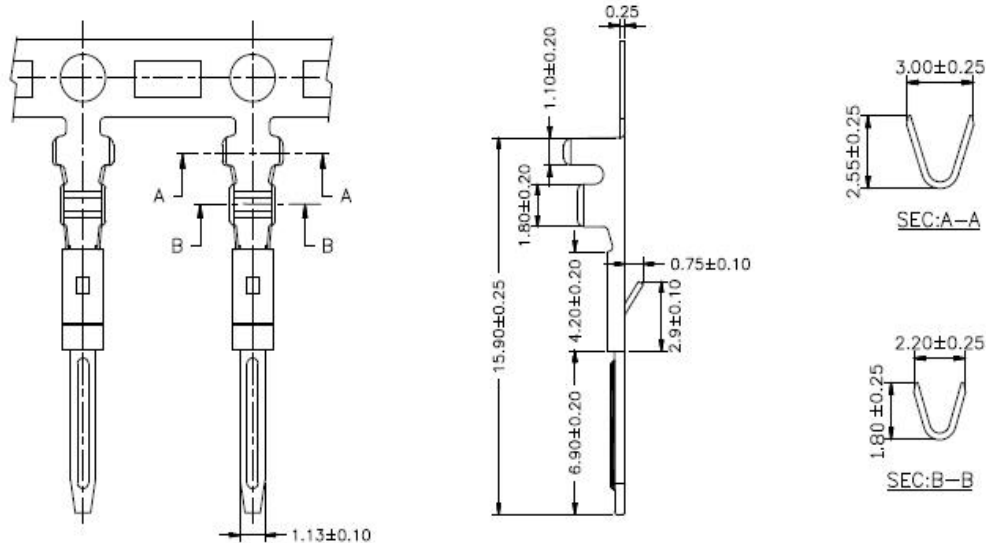

Specifications:

Material: Phosphoric copper

Applicable wire sizes: AWG#22~28#

Rating:

Current Rating: 3.0 Amp (22AWG)

Voltage Rating: 250V AC/DC

Operating Temperature Range: -40°~+105°C

Electrical:

Contact resistance: 10m Ohm Max

Insulator resistance: 500M ohm min.


Withstanding Voltage: 1500V AC/Minute

Female terminal with male rubber shell

Ordering Information

H2513TF-PQ
1 2 3 4

- 1:—Series No.
2:—T:Terminal
3:—F:Female
4:—Q:Plated Tin

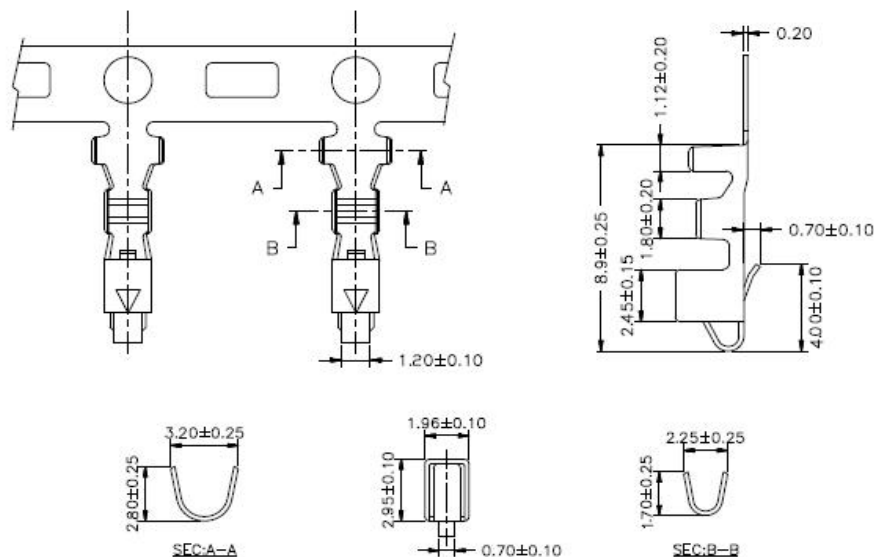

东莞市华晶电子有限公司
<http://www.hjbright.com>