


.098''(2.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.098''(2.50mm) Connectors

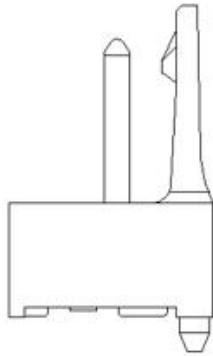

Specifications:

Material And Finish:

Insulator: Nylon 6T UL94V-0 Color: Natural

Contact: Copper Alloy

Plated: See Ordering Information

Rating:

Current Rating: 3.0 Amp

Voltage Rating: 250V AC/DC

Operating Temperature Range: $-40^{\circ}\sim+125^{\circ}\text{C}$

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 800V AC/Minute





Ordering Information

A2581H-02S-01-D

1 2 3 4 5

- 1: —Series No.
- 2: —H: SMT Type
- 3: —No. of Positions
- 4: —S: Matte Tin Plated
- 5: —D: In Tape&Reel

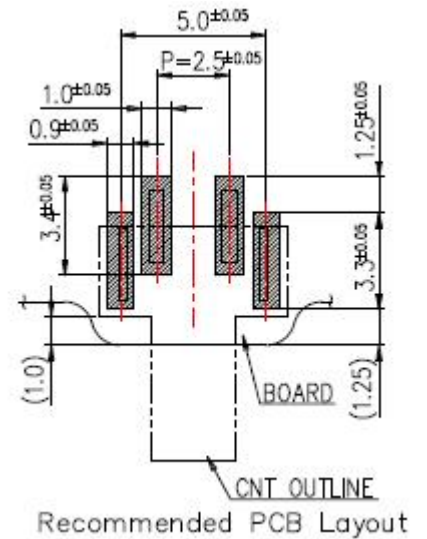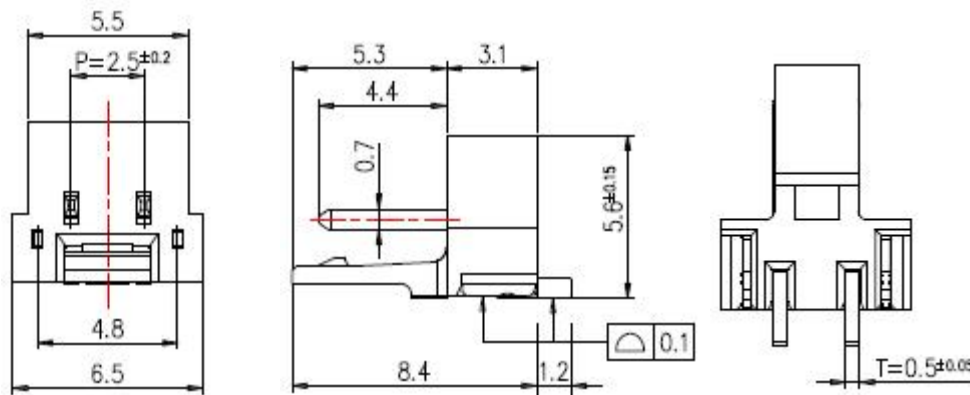

Specifications:

Material And Finish:

Insulator: Nylon 6T UL94V-0 Color: Natural

Contact: Copper Alloy

Plated: See Ordering Information

Rating:

Current Rating: 3.0 Amp

Voltage Rating: 250V AC/DC


Operating Temperature Range: $-40^{\circ}\sim+125^{\circ}\text{C}$

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 800V AC/Minute



Ordering Information

A2581M-02S-01-F

1 2 3 4 5

- 1: —Series No.
- 2: —H: SMT Type
- 3: —No. of Positions
- 4: —S: Matte Tin Plated
- 5: —F: W/Cap In Tape&Reel

