


.138"(3.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.138"(3.50mm) Connectors



.138" (3.50mm) Pitch Housing

Specifications:

Material And Finish:

Insulator:PBT ,Color:Black

Rating:

Current Rating:22.0 Amp(16AWG)

Voltage Rating:14V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:8m Ohm Max

Insulator resistance:100M ohm min.



Withstanding Voltage:1000V AC/Minute



Ordering Information

H35000F-08P-01-A

- 1:—Series No.
2:—F:Female
3:—No. of Positions
4:—A:In Bag

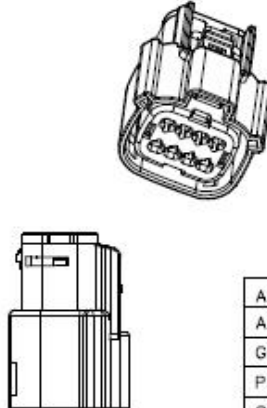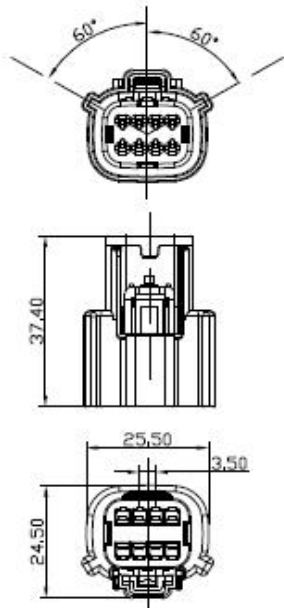

Abbreviation	Description	Color	Material
A Type Housing	Housing,Keying Optiong A	Black	PBT
Grommet Cap	Grommet Cap(Open)	Black	PBT
Plr	Plr	Natural	PBT
Cap	Cap	Red	PBT
Mat seal	Mat seal	Blue	Silicone
RR	RR	Red	Silicone

Specifications:

Material And Finish:

Insulator:PBT ,Color:Black

Rating:

Current Rating:22.0 Amp(16AWG)

Voltage Rating:14V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:8m Ohm Max

Insulator resistance:100M ohm min.




Withstanding Voltage:1000V AC/Minute



Ordering Information

H35000M-08P-01-A

- 1:—Series No.
2:—M:Male
3:—No. of Positions
4:—A:In Bag

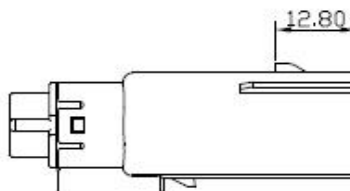

Abbreviation	Description	Color	Material
A Type Housing	Housing,Keying Optiong A	Black	PBT
Grommet Cap	Grommet Cap(Open)	Black	PBT
Plr	Plr	Natural	PBT
Mat Seal	Mat Seal	Red	Silicone

.138" (3.50mm) Pitch Terminal

Specifications:

Material And Finish:

Contact: Copper alloy

Rating:

Current Rating: 22 Amp (16AWG)

Voltage Rating: 14V AC/DC

Operating Temperature Range: -40°~+125°C

Electrical:

Contact resistance: 8m Ohm Max

Wire Gauge: #16~20AWG

HJBRIGHT®

Ordering Information

H35000TF-PX
1 23 4





1:—Series No.

2:—T:Terminal

3:—F:Female

4:—A:Gold Flash

Q: Tin Plated

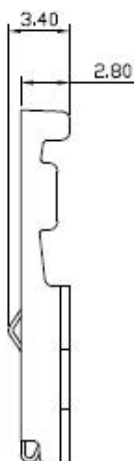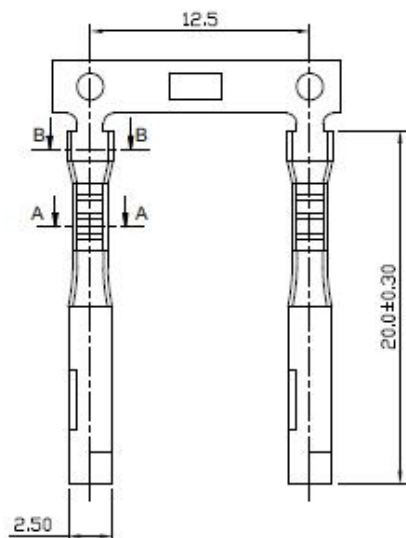

Specifications:

Material And Finish:

Contact: Copper alloy

Rating:

Current Rating: 22 Amp (16AWG)

Voltage Rating: 14V AC/DC

Operating Temperature Range: -40°~+125°C

Electrical:

Contact resistance: 8m Ohm Max

Wire Gauge: #16~20AWG

Ordering Information

H35000TM-PX
1 23 4





1:—Series No.

2:—T:Terminal

3:—M:Male

4:—A:Gold Flash

Q: Tin Plated

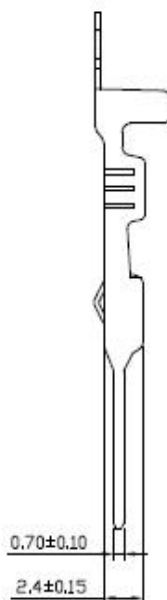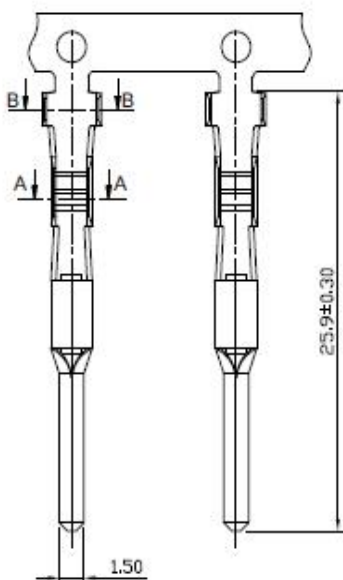

东莞市华晶电子有限公司
<http://www.hjbright.com>