

.138"(3.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.138"(3.50mm) Connectors



.138" (3.50mm) Pitch 90° Wafer

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:White

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:10.0 Amp(18AWG)

Voltage Rating:12V~250V AC/DC

Operating Temperature Range:-30°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1800V AC/Minute



HJBRIGHT®

Ordering Information

A3501R-03S-01-X
1 2 3 4 5

1:—Series No.





2:—R:R/A Type

3:—No. of Positions

4:—S:Matte Tin Plated

5:—A:In Bag

C:In Tray

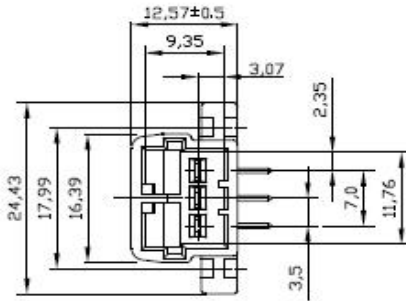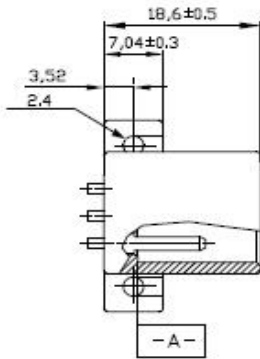

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Nature

Contact:Brass

Rating:

Current Rating:10.0 Amp(18AWG)

Voltage Rating:12V~250V AC/DC

Operating Temperature Range:-30°C~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1800V AC/Minute



Ordering Information

A3501R-06S-01-C
1 2 3 4 5




1:—Series No.

2:—R:R/A Type

3:—No. of Positions

4:—S:Matte Tin plated

5:—C:In Tray

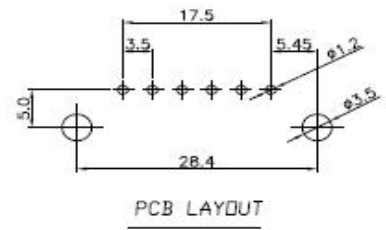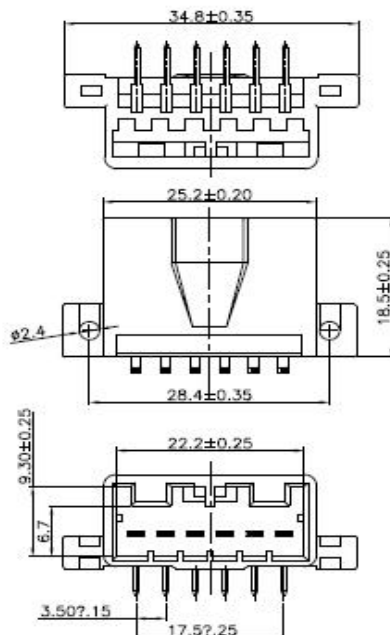

.138" (3.5mm) Pitch 180° Wafer

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:White

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:10.0 Amp(18AWG)

Voltage Rating:12V ~250V AC/DC

Operating Temperature Range:-30°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1800V AC/Minute




HJBRIGHT®

Ordering Information

A3501S-03S-02-X
1 2 3 4 5

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— S: Matte Tin Plated
5:— A: In Bag
C: In Tray

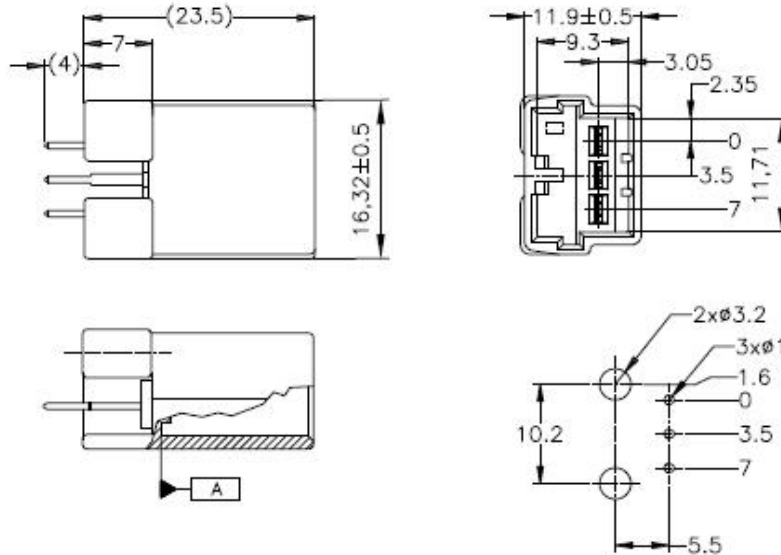

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color: White

Contact:Brass

Plated:See Ordering Information

Rating:

Current Rating:10.0Amp(18AWG)

Voltage Rating:12V~250V AC/DC


Operating Temperature Range:-30°C~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.


Withstanding Voltage:1800V AC/Minute



Ordering Information

A3501S-06S-01-C
1 2 3 4 5

- 1:— Series No.
2:— S: Straight Type
3:— No. of Positions
4:— S: Matte Tin Plated
5:— C: In Tray

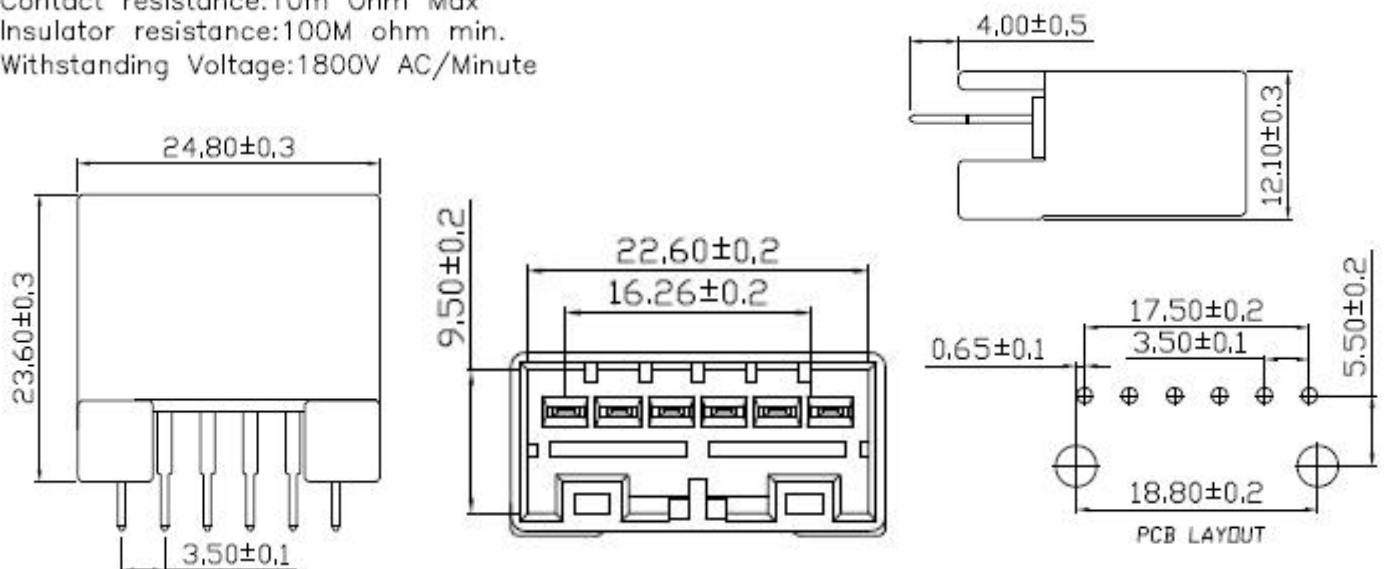

东莞市华晶电子有限公司
<http://www.hjbright.com>

.138" (3.50mm) Pitch Housing

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color: White

Rating:

Current Rating:10 Amp(18AWG)

Voltage Rating:12V~250V AC/DC

Operating Temperature Range:-30°~+105°C

Celectrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1800V AC/Minute

HJBRIGHT®

Ordering Information





H3501-03P-A

1 2 3

1:—Series No.

2:—No. of Positions

3:—A: In Bag

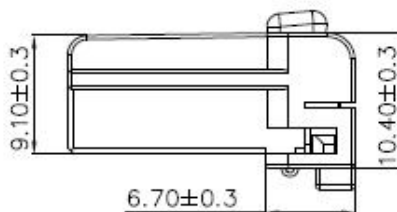

Specifications:

Material:

Insulator:PBT UL94V-0 Color White

Rating:

Current Rating:10.0Amp(18AWG)

Voltage Rating:12V~250V AC/DC

Operating Temperature

Range:-30°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1800V AC/Minute

Ordering Information





H3501-06P-A

1 2 3

1:—Series No.

2:—No. of Positions

3:—A:In Bag

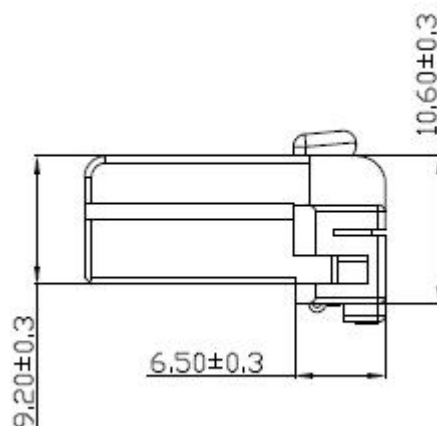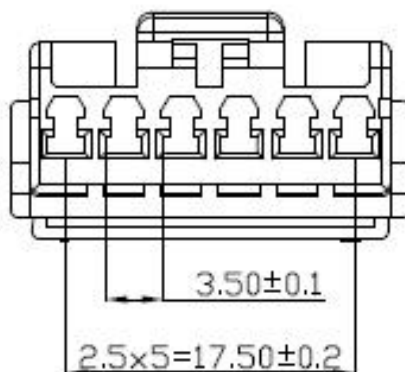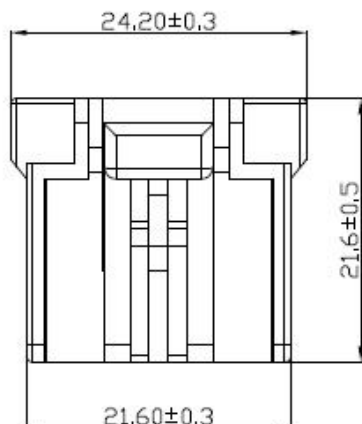

东莞市华晶电子有限公司
<http://www.hjbright.com>

.138" (3.50mm) Pitch Housing / Terminal

Specifications:

Material:

Insulator:PBT UL94V-0 Color White

Rating:

Current Rating:10 Amp(18AWG)

Voltage Rating:12V ~250V AC/DC

Operating Temperature Range:-30°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Withstanding Voltage:1800V AC/Minute

HJBRIGHT®

Ordering Information


H3502-03P-A

1 2 3

1:—Series No.

2:—No. of Positions

3:—A:In Bag

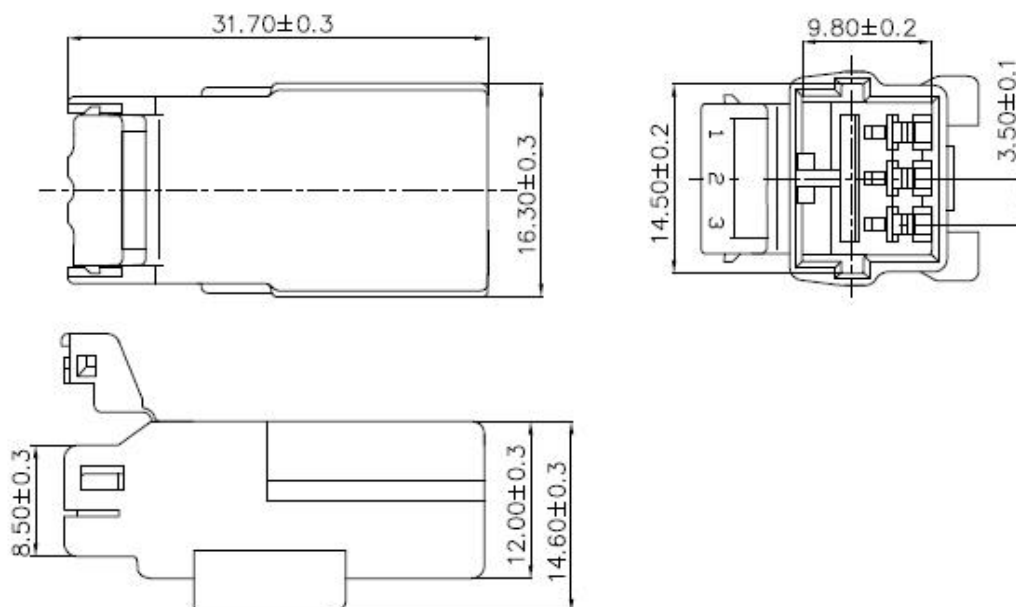


Note:

Material : Phosphor bronze

Plating : Terminal Finish:Pre-Tin

Wire Range: 0.5~1.25MM²

Qty/Reel:3000 PCS



Ordering Information

H3501TF-PQ


1 23 4

1:—Series No.

2:—Terminal

3:—F: Female Terminal

4:—Q: Tin plated

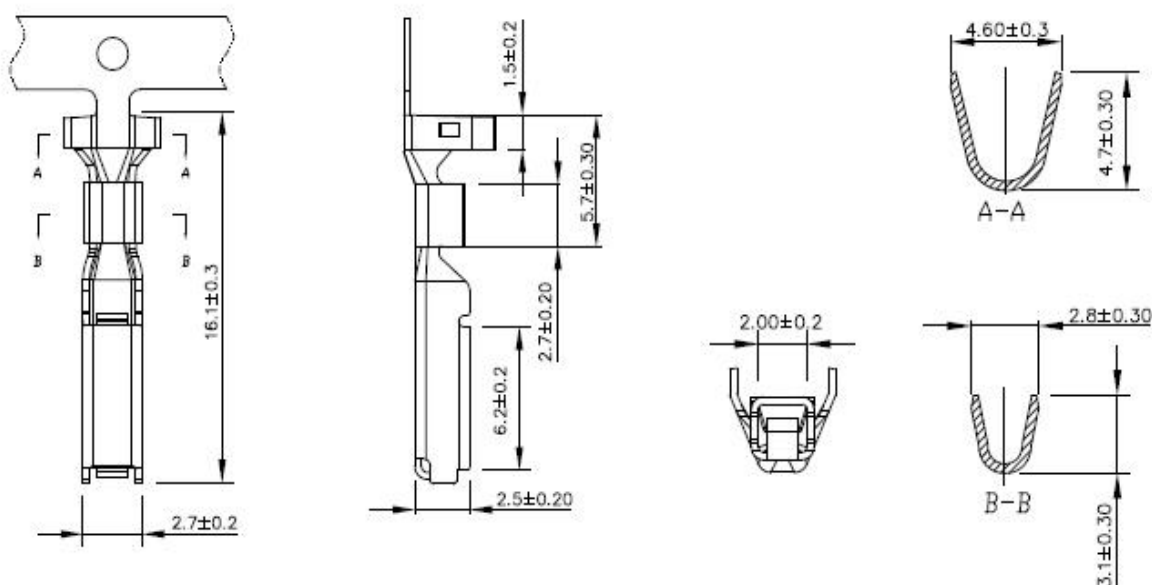

东莞市华晶电子有限公司
<http://www.hjbright.com>

.138" (3.50mm) Pitch Terminal

Note:

Material : Phosphor bronze

Plating : Terminal Finish:Pre-Tin

Wire Range: 0.5~1.25MM²

Qty/Reel:3000 PCS



HJBRIGHT®

Ordering Information

H3501TM-XXQ

1 2 3 4 5

1:—Series No.

2:—Terminal

3:—M: Male Terminal

4:—01:#20-#22

02:#22-#24

5:—Q: Tin plated

