


.156" (3.96mm) Pitch/Disconnectable Insulation Displacement Connectors

.156" (3.96mm) Connectors

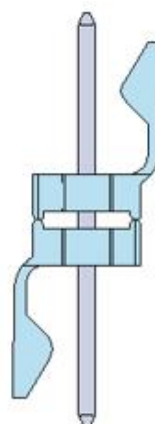

.156" (3.96mm) Pitch 180° Wafer

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Black

Contact:Brass

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC





Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

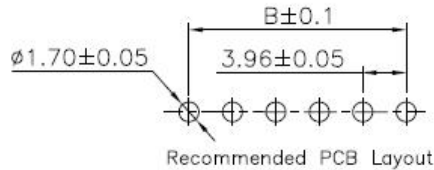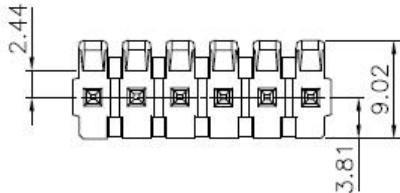

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Black

Contact:Brass

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC





Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

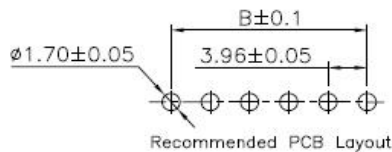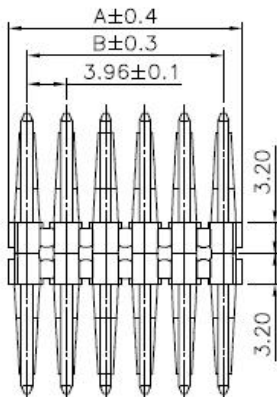

Ordering Information

A3962S-XXX-01-A

1 2 3 4 5

- 1:—Series No.
- 2:—S: Straight Type
- 3:—No. of Positions
- 4:—A: Gold Flash
Q: Tin Plated
W: Matte Tin Plated
- 5:—A: In Bag

Circuits	Dimension mm	
	A	B
02	6.78	3.96
03	10.74	7.92
04	14.70	11.88
05	18.66	15.84
06	22.62	19.80
07	26.58	23.76
08	30.54	27.72
09	34.50	31.68
10	38.46	35.64
11	42.42	39.60
12	46.38	43.56
13	50.34	47.52
14	54.30	51.48
15	58.26	55.44
16	62.22	59.40
17	66.18	63.36
18	70.14	67.32
19	74.10	71.28
20	78.06	75.24
21	82.02	79.20
22	85.98	83.16
23	89.94	87.12
24	93.90	91.08

Ordering Information

A3962SD-XXX-01-A

1 23 4 5 6

- 1:—Series No.
- 2:—S: Straight Type
- 3:—D: Single row double plastic
- 4:—No. of Positions
- 5:—A: Gold Flash
Q: Tin Plated
S: Matte Tin Plated
- 6:—A: In Bag

Circuits	Dimension mm	
	A	B
02	6.78	3.96
03	10.74	7.92
04	14.70	11.88
05	18.66	15.84
06	22.62	19.80
07	26.58	23.76
08	30.54	27.72
09	34.50	31.68
10	38.46	35.64
11	42.42	39.60
12	46.38	43.56
13	50.34	47.52
14	54.30	51.48
15	58.26	55.44
16	62.22	59.40
17	66.18	63.36
18	70.14	67.32
19	74.10	71.28
20	78.06	75.24
21	82.02	79.20
22	85.98	83.16
23	89.94	87.12
24	93.90	91.08

.156" (3.96mm) Pitch 90° Wafer / Housing

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 Color:Black

Contact:Brass

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC





Operating Temperature Range:-25°~+85°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

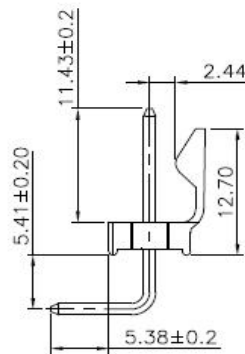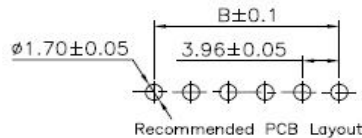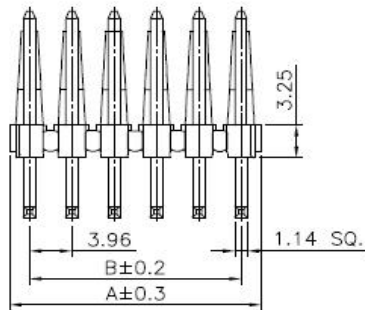

HJBRIGHT®

Ordering Information

A3962R-XXX-01-A

1 2 3 4 5

1:—Series No.

2:—R:R/A Type

3:—No. of Positions

4:—A:Gold Flash

Q:Tin Plated

S:Matte Tin Plated

5:—A:In Bag

Circuits	Dimension mm	
	A	B
02	6.78	3.96
03	10.74	7.92
04	14.70	11.88
05	18.66	15.84
06	22.62	19.80
07	26.58	23.76
08	30.54	27.72
09	34.50	31.68
10	38.46	35.64
11	42.42	39.60
12	46.38	43.56
13	50.34	47.52
14	54.30	51.48
15	58.26	55.44
16	62.22	59.40
17	66.18	63.36
18	70.14	67.32
19	74.10	71.28
20	78.06	75.24
21	82.02	79.20
22	85.98	83.16
23	89.94	87.12
24	93.90	91.08

Specifications:

Material And Finish:

Insulator:PA66 UL94V-2 Color:Red or Yellow

Contact:Copper Alloy

Plated:See Ordering Information

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-25°~+85°C




Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1000V AC/Minute

Wire Range:AWG#20~#22

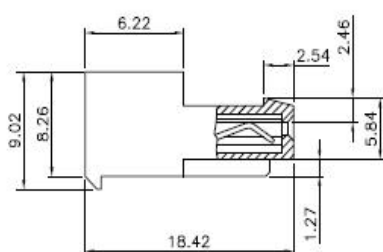

Ordering Information

H3962-XXX-01-XA

1 2 3 4 5

1:—Series No.

2:—No. of Positions

3:—Q:Tin Plated

4:—S:Matte Tin Plated

R:Red

Y:Yellow

5:—A:In bag

Circuits	Dimension mm		Circuits	Dimension mm	
	A	B		A	B
02	7.92	3.96	14	55.47	51.48
03	11.89	7.92	15	59.44	55.44
04	15.85	11.88	16	63.40	59.40
05	19.81	15.84	17	67.36	63.36
06	23.77	19.80	18	71.32	67.32
07	27.74	23.76	19	75.29	71.28
08	31.70	27.72	20	79.25	75.24
09	35.66	31.68	21	83.21	79.20
10	39.62	35.64	22	87.17	83.16
11	43.59	39.60	23	91.13	87.12
12	47.55	43.56	24	95.10	91.08
13	51.51	47.52			

东莞市华晶电子有限公司
<http://www.hjbright.com>