

.165"(4.20mm) Pitch/Disconnectable Insulation Displacement Connectors

.165"(4.20mm) Connectors



.165" (4.20mm) Pitch Housing / Terminal

Specifications:

Material And Finish:

Insulator:PBT+10GF UL94V-0

Color:Black

Rating:

Current Rating:7.5 Amp(Power)

Operating Temperature Range:-40~+120°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:50M ohm min.

Withstanding Voltage:500V AC/Minute



Ordering Information

H4203M-04P-01-BA

1 2 3 4 5


1: Series No.

2: M:Male Housing




3: No. of Positions

4: B:Black

5: A:In Bag

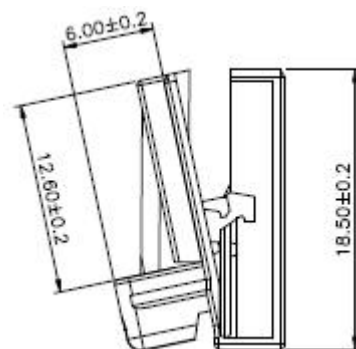

Locked Position

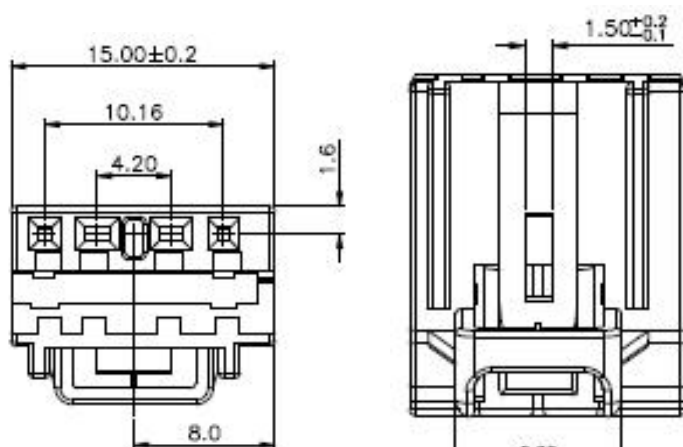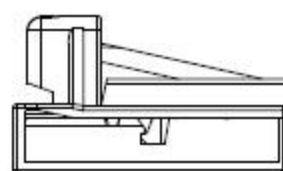

Material:

Terminal:Copper alloy

Rating:

Current Rating:25 Amp

Temperature Range:-40°C~+130°C

Wire Range:0.13mm²~1.5mm²



Ordering Information

H4001TF-PX-XX-A

1 2 3 4

1: Series No.

2: T:Female Terminal

3: Q: Tin Plated

AG: Silver plated



A2: 30u"Gold on contact; Tin on tail

4: 01: 0.13mm²~0.22mm²


02: 0.25mm²~0.35mm²

03: 0.50mm²~0.75mm²

04: 1.0mm²~1.50mm²

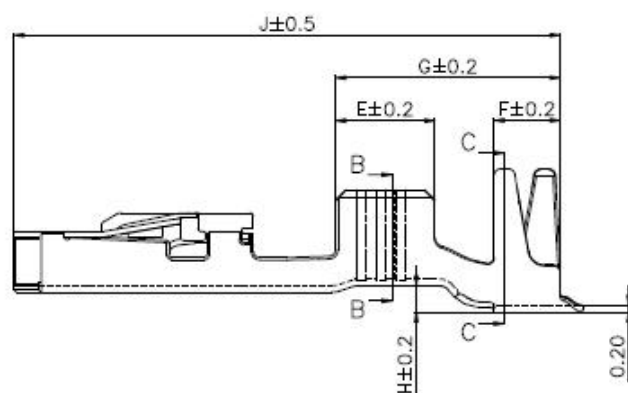

B-B



C-C

.165" (4.20mm) Pitch Terminal

Specifications:

Material And Finish:

Material : Copper alloy

Wire Rang: 0.35mm²(AWG#22)

HJBRIGHT®

Ordering Information

H25082TL-PQ

1 2 3

1:—Series No.

2:—Terminal

3:—Q: Tin Plated

