

.138''(3.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.138''(3.50mm) Connectors




Specifications:

Material And Finish:

Insulator:PBT+30%GF **Color:**Black

Contact:Copper Alloy

Plated:See Ordering Information



Rating:

Current Rating:10 Amp/Pin

Voltage Rating:14V DC

Operating Temperature

Range:-40°~+125°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:500M ohm min.

Withstanding Voltage:500V AC/Minute

Ordering Information

A35008S-12S-01-C

1 2 3 4 5








1:—Series No.

2:—S: Straight Type

3:—No. of Positions

4:—S: Matte Tin Plated

5:—C: In Tray

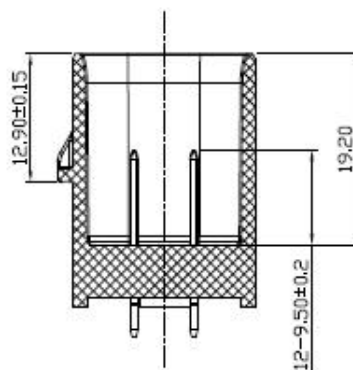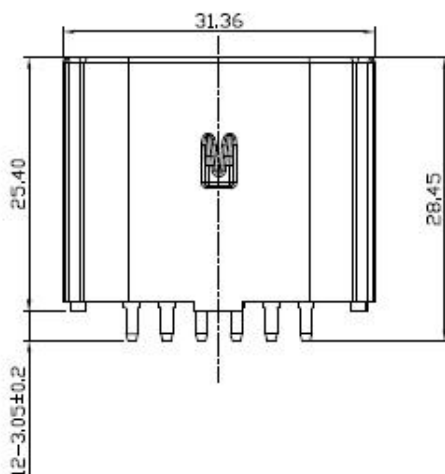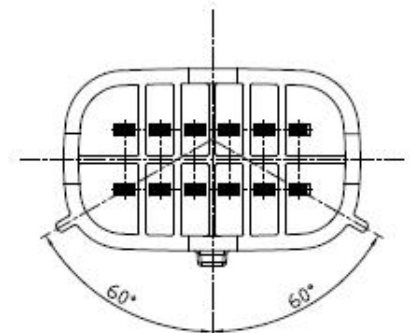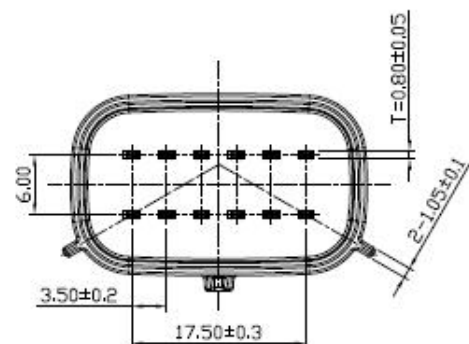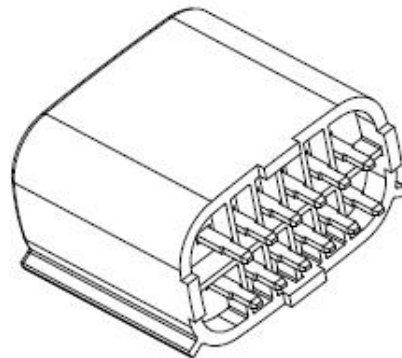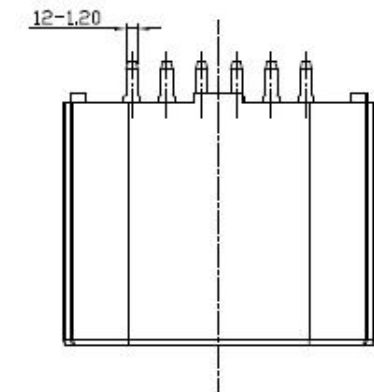

PCB LAYOUT (TOP VIEW)

Tolerance:±0.05mm