

.175"(4.45mm) Pitch/Disconnectable Insulation Displacement Connectors

.175"(4.45mm) Connectors



.175" (4.45mm) Pitch Housing

Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 ,Color:Grey

Rating:

Current Rating:13.0 Amp(14AWG)

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.




Withstanding Voltage:2000V AC/Minute




Ordering Information

H445001F-XXP-A

- 1:— Series No.
2:— F:Female
3:— No. of Positions
4:— A:In Bag



RECOMMENDED PANEL CUTOUT



Specifications:

Material And Finish:

Insulator:PA66 UL94V-0 ,Color:Grey

Rating:

Current Rating:14.0 Amp

Voltage Rating:250V AC/DC

Operating Temperature Range:-40°~+105°C

Electrical:

Contact resistance:20m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:2000V AC/Minute






Ordering Information

H445001M-XXP-A

1 2 3 4

- 1:— Series No.
2:— M:Male
3:— No. of Positions
4:— A:In Bag

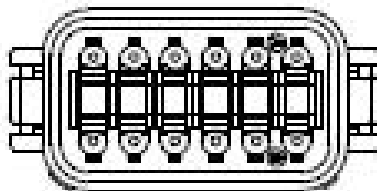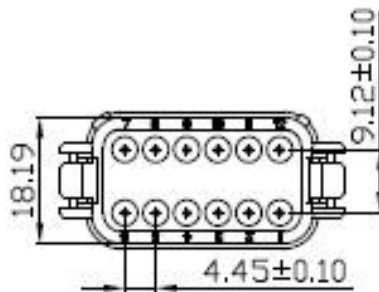


Specifications:
Material And Finish:
Insulator:PA66-GF15,UL94V-0,Color:Gray
Temperature Range:-55°C~+125°C



Ordering Information
H445001 M - 03 P - 01 - A
 1 2 3 4

- 1:—Series No.
2:—M:Male Housing
3:—No. of Positions
4:—A:In Bag

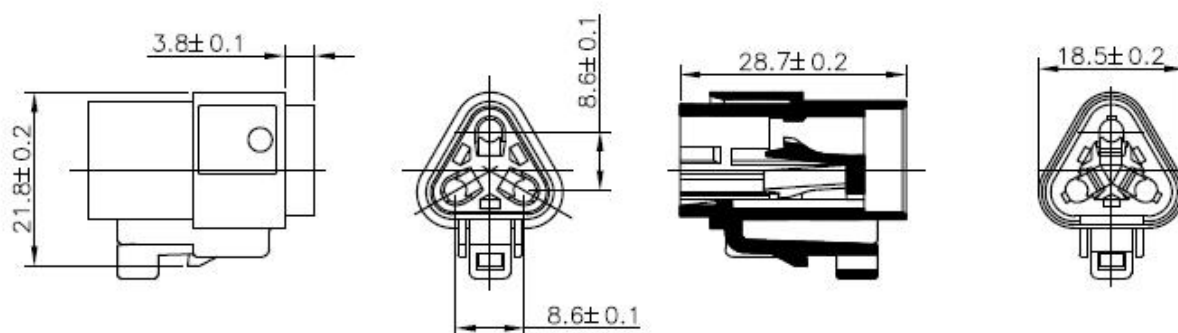


Specifications:
Material And Finish:
Insulator:PA66-GF15,UL94V-0,Color:Gray
Temperature Range:-55°C~+125°C



Ordering Information
H445001M-04P-01-A
 1 2 3 4

- 1: — Series No.
2: — Male Housing
3: — No. of Positions
4: — A:In Bag

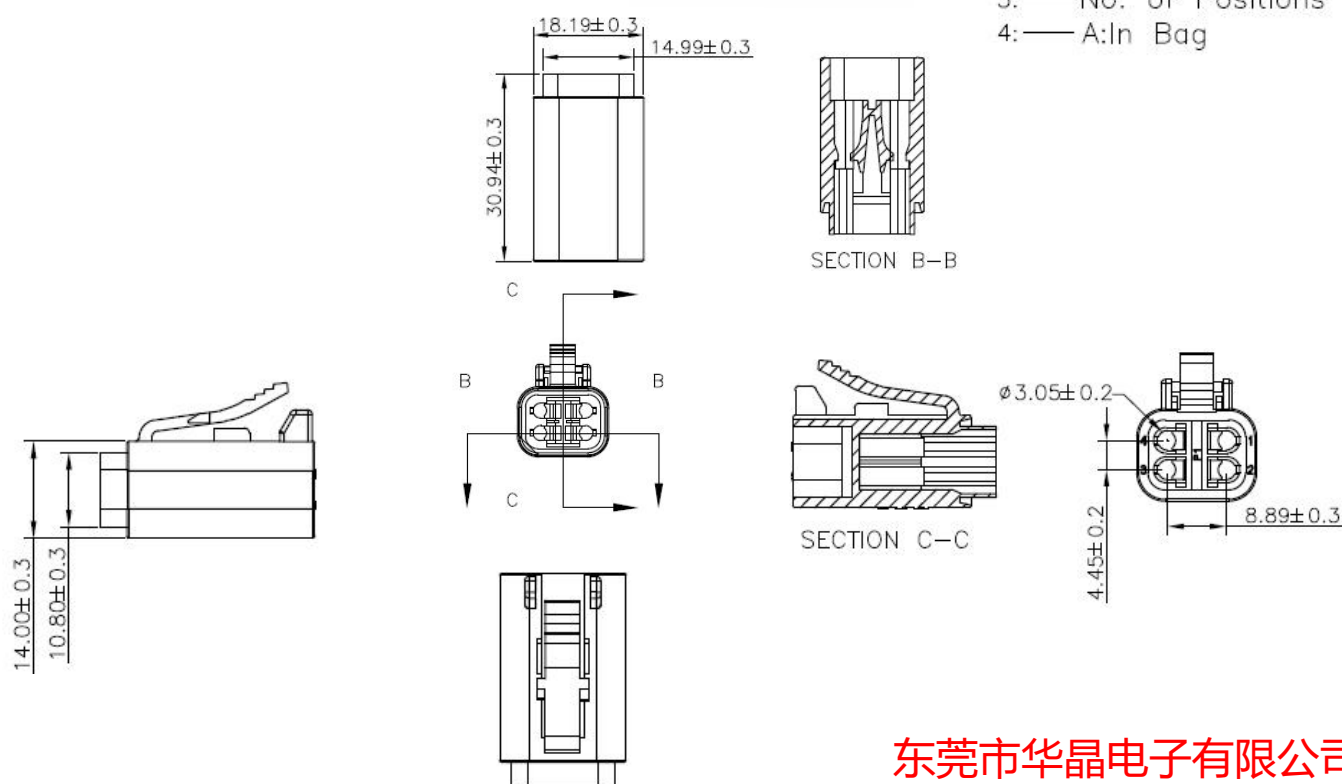



.175" (4.45mm) Pitch Terminal

Specifications:
 Material And Finish:
 Contact: Copper alloy
 Rating:
 Current Rating: 14 Amp (14AWG)
 Voltage Rating: 250V AC/DC
 Operating Temperature Range: -40°~+105°C
 Electrical:
 Contact resistance: 20m Ohm Max
 Wire Gauge: #14~20AWG



Ordering Information
 H445001TF-PQ
 1 23 4

1:— Series No.
 2:— T: Terminal
 3:— F: Female Terminal
 4:— Q: Tin Plated

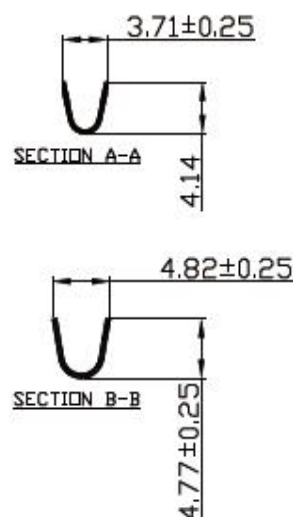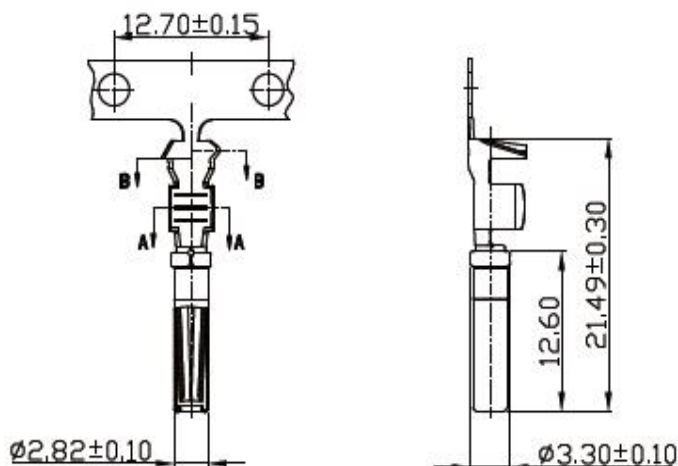

Specifications:
 Material And Finish:
 Contact: Copper alloy
 Rating:
 Current Rating: 14 Amp (14AWG)
 Voltage Rating: 250V AC/DC
 Operating Temperature Range: -40°~+105°C
 Electrical:
 Wire Gauge: #14~20AWG



Ordering Information
 H445001TM-PQ
 1 23 4

1:— Series No.
 2:— T: Terminal
 3:— M: Male Terminal
 4:— Q: Tin Plated

