

.350" (8.90mm) Pitch/Disconnectable Insulation Displacement Connectors

.350" (8.90mm) Connectors



.350" (8.90mm) Pitch 90° Wafer

HJBRIGHT®

Specifications:

Material And Finish:

Insulator: Nylon 66 UL94V-0 Color: Beige
Contact: Brass
Plated: Tin 100u"~150u" Plated, Over Nickel
30u"~50u" Plated

Rating:

Current Rating: 25A AC,DC
Voltage Rating: 250V AC,DC
Operating Temperature Range: -25°~+85°C

Electrical:

Contact resistance: 20m Ohm Max
Insulator resistance: 1000M ohm min.
Withstanding Voltage: 1500V AC/Minute




Ordering Information




A8902R-06Q-01-X

1 2 3 4 5

- 1: — Series No.
- 2: — R: R/A Type
- 3: — No. of Positions
- 4: — Q: Tin Plated
- 5: — A: In Bag
B: In Tube
C: In Tray

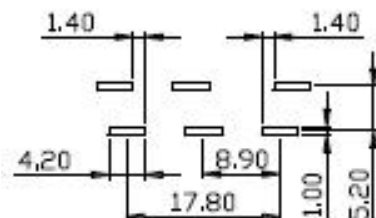

P.C.B LAYOUT

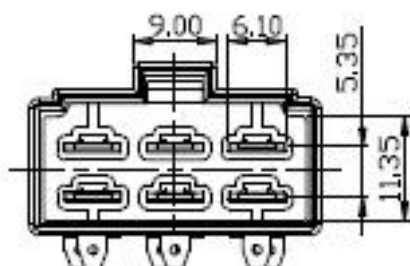

Specifications:

Material And Finish:

Insulator: Nylon 66 UL94V-0 Color: Black
Contact: Brass
Plated: Tin 100u"~150u" Plated, Over Nickel
30u"~50u" Plated

Rating:

Current Rating: 25A AC,DC
Voltage Rating: 250V AC,DC
Operating Temperature Range: -25°~+85°C

Electrical:

Contact resistance: 20m Ohm Max
Insulator resistance: 1000M ohm min.
Withstanding Voltage: 1500V AC/Minute




Ordering Information





A8902R-06Q-03-X

1 2 3 4 5

- 1: — Series No.
- 2: — R: R/A Type
- 3: — No. of Positions
- 4: — Q: Tin Plated
- 5: — A: In Bag
B: In Tube
C: In Tray



P.C.B LAYOUT

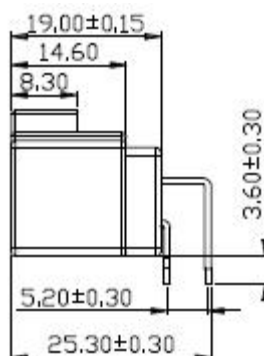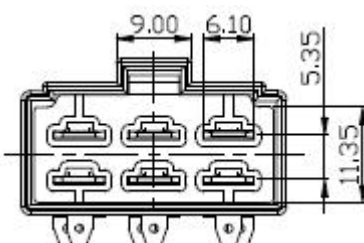

东莞市华晶电子有限公司
<http://www.hjbright.com>

Specifications:

Material And Finish:

Insulator: Nylon 66 UL94V-0

Contact: Barss

Plated: See Ordering Information

Rating:

Current Rating: 25.0 Amp

Voltage Rating: 250V AC/DC

Operating Temperature Range: -25°~+85°C

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 1500V AC/Minute




Ordering Information

A89002R-XXX-01-X

1 2 3 4 5

- 1: — Series No.
- 2: — R: R/A Type
- 3: — No. of Positions
- 4: — A: Gold Flash
Q: Tin Plated
- 5: — A: In Bag
B: In Tube
C: In Tray

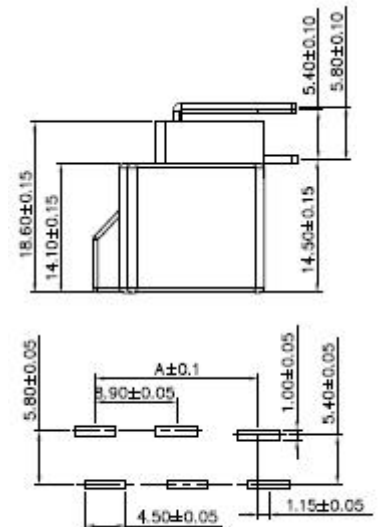

Recommended PCB Layout

Specifications:

Material And Finish:

Insulator: Nylon 66 UL94V-0

Contact: Barss

Plated: See Ordering Information

Rating:

Current Rating: 25.0 Amp

Voltage Rating: 250V AC/DC

Operating Temperature Range: -25°~+85°C

Electrical:

Contact resistance: 20m Ohm Max

Insulator resistance: 1000M ohm min.

Withstanding Voltage: 1500V AC/Minute




Ordering Information

A89002S-XXX-01-X

1 2 3 4 5

- 1: — Series No.
- 2: — S: Straight Type
- 3: — No. of Positions
- 4: — A: Gold Flash
Q: Tin Plated
- 5: — A: In Bag
B: In Tube
C: In Tray

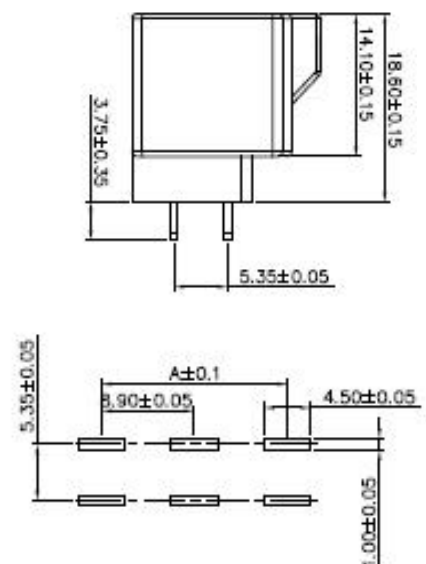

Recommended PCB Layout