





.098''(2.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.098''(2.50mm) Connectors



Specifications:

Material And Finish:

Insulator:PA66 UL94V-0

Color:Natural

Rating:

Current Rating:3.0 Amp

Voltage Rating:250V AC/DC


Operating Temperature Range:-25~+85°C

Electrical:

Contact resistance:30m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:800V AC/Minute



Ordering Information




H25001-XXP-01-A

1 2 3




1: — Series No.

2: — No. of Positions

3: — A:In Bag

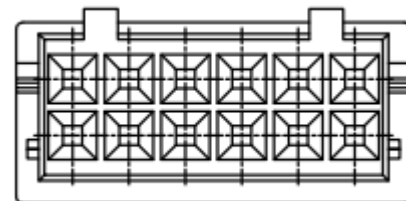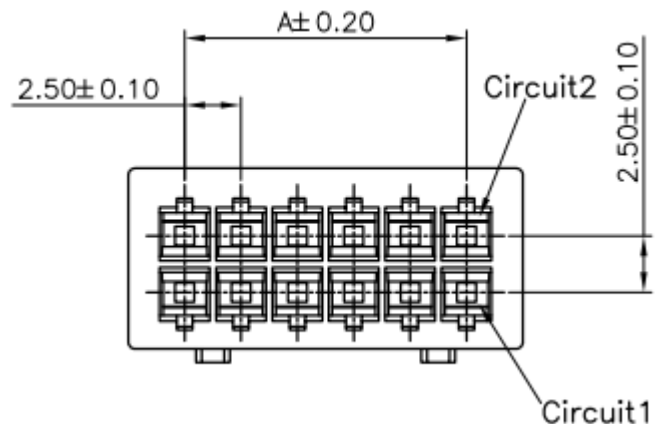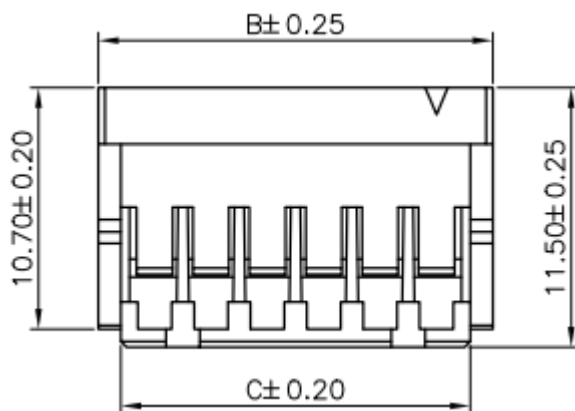

PIN	Dimension(mm)		
	A	B	C
2*2P	2.50	7.50	5.50
2*3P	5.00	10.00	8.00
2*4P	7.50	12.50	10.50
2*5P	10.00	15.00	13.00
2*6P	12.50	17.50	15.50
2*7P	15.00	20.00	18.00
2*8P	17.50	22.50	20.50
2*9P	20.00	25.00	23.00
2*10P	22.50	27.50	25.50
2*11P	25.00	30.00	28.00
2*12P	27.50	32.50	30.50
2*13P	30.00	35.00	33.00
2*14P	32.50	37.50	35.50
2*15P	35.00	40.00	38.00
2*16P	37.50	42.50	40.50
2*17P	40.00	45.00	43.00
2*18P	42.50	47.50	45.50
2*19P	45.00	50.00	48.00
2*20P	47.50	52.50	50.50

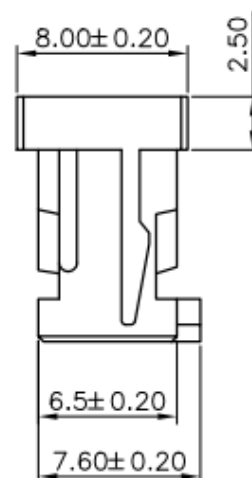


2*2P

Specifications:
Material And Finish:
Insulator:PA66 UL94V-0
Contact:Brass
Plated:See Ordering Information






Rating:
Current Rating:3.0 Amp
Voltage Rating:250V AC DC
Operating Temperature Range:-25°~+85°C

Electrical:
Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min
Withstanding Voltage:800V AC/Minute




Ordering Information
A25001R-XXQ-01-A

- 1:— Series No.
2:— R:R/A Type
3:— No. of Positions
4:— Q:Tin plated
5:— A:In bag

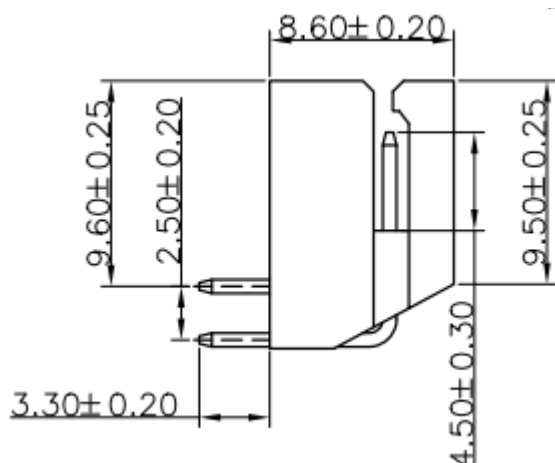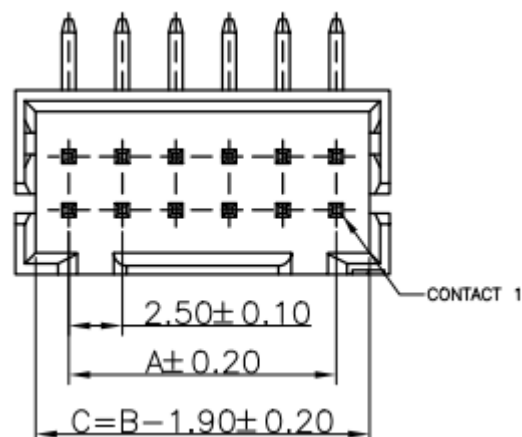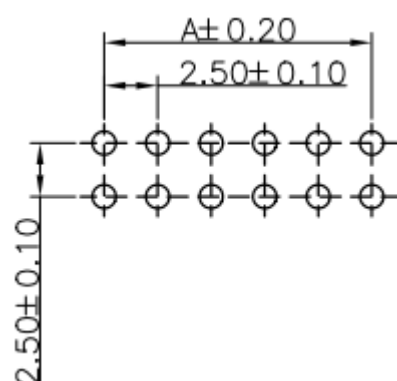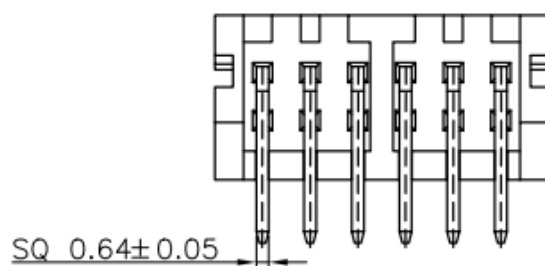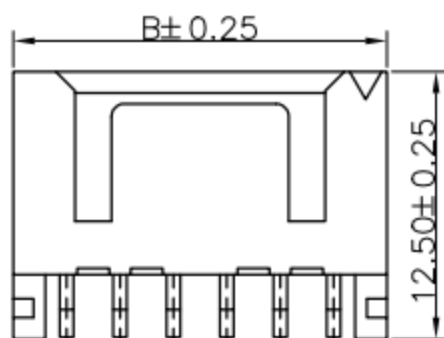

编号	尺寸 (mm)	
	A	B
2*2P	2.50	7.50
2*3P	5.00	10.00
2*4P	7.50	12.50
2*5P	10.00	15.00
2*6P	12.50	17.50
2*7P	15.00	20.00
2*8P	17.50	22.50
2*9P	20.00	25.00
2*10P	22.50	27.50
2*11P	25.00	30.00
2*12P	27.50	32.50
2*20P	47.50	52.50

Specifications:
Material And Finish:
Insulator:PA66 UL94V-0
Contact:Brass
Plated:See Ordering Information








Rating:
Current Rating:3.0 Amp
Voltage Rating:250V AC DC
Operating Temperature Range:-25~+85°C

Electrical:
Contact resistance:30m Ohm Max
Insulator resistance:1000M ohm min
Withstanding Voltage:800V AC/Minute

Ordering Information

A25001S-XXQ-01-A

- 1:— Series No.
2:— S:Straight Type
3:— No. of Positions
4:— Q:Tin plated
5:— A:In bag

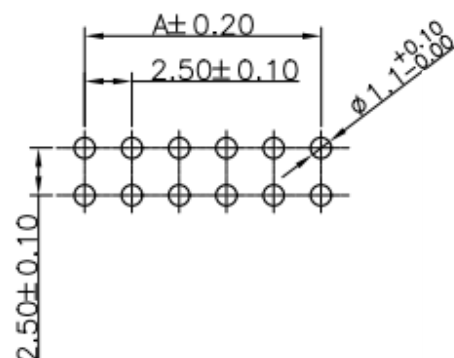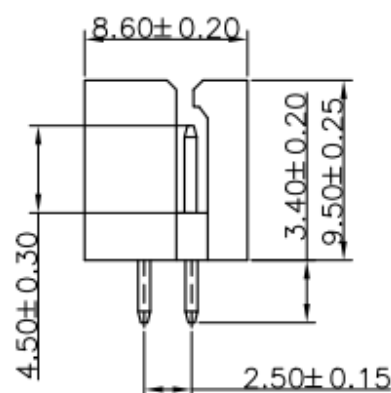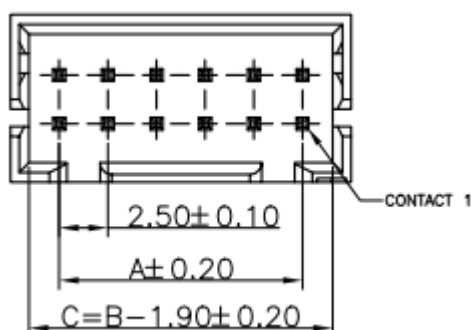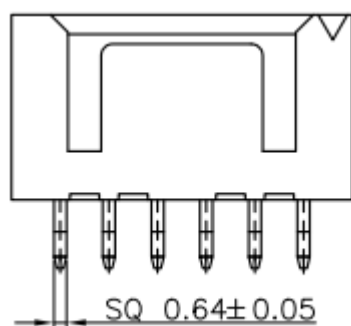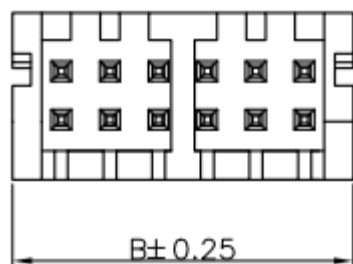

编号	尺寸 (mm)	
	A	B
2*2P	2.50	7.50
2*3P	5.00	10.00
2*4P	7.50	12.50
2*5P	10.00	15.00
2*6P	12.50	17.50
2*7P	15.00	20.00
2*8P	17.50	22.50
2*9P	20.00	25.00
2*10P	22.50	27.50
2*11P	25.00	30.00
2*12P	27.50	32.50
2*20P	47.50	52.50

Material:

Terminal: Phosphor Bronze

Wire Range: AWG#24~28

Rating:

Current Rating: 3.0 Amp


Voltage Rating: 250V AC/DC

Operating Temperature Range: -25°C ~ +85°C

Contact Resistance: 30mΩ Max

Insulation Resistance 1000MΩ Min

Withstanding Voltage: 800V AC/minute






Ordering Information
H25001T-PX

1 2 3


1: — Series No.

2: — T: Terminal


3: — A: Gold flash

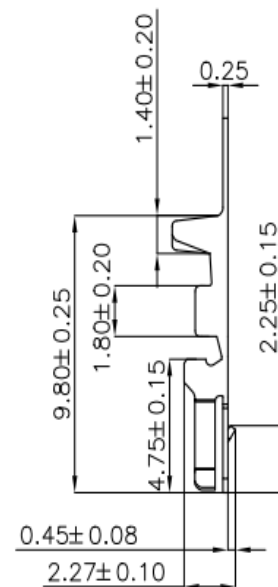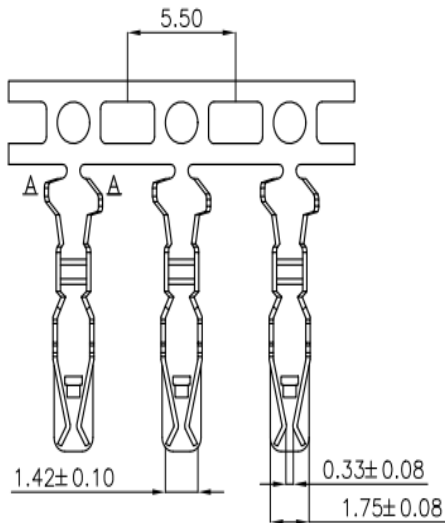

SEC:A-A

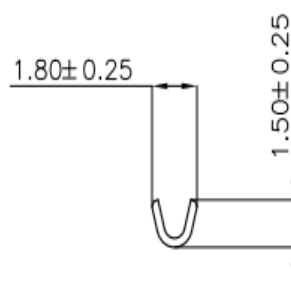

SEC:B-B



SEC:C-C