


.138''(3.50mm) Pitch/Disconnectable Insulation Displacement Connectors

.138''(3.50mm) Connectors

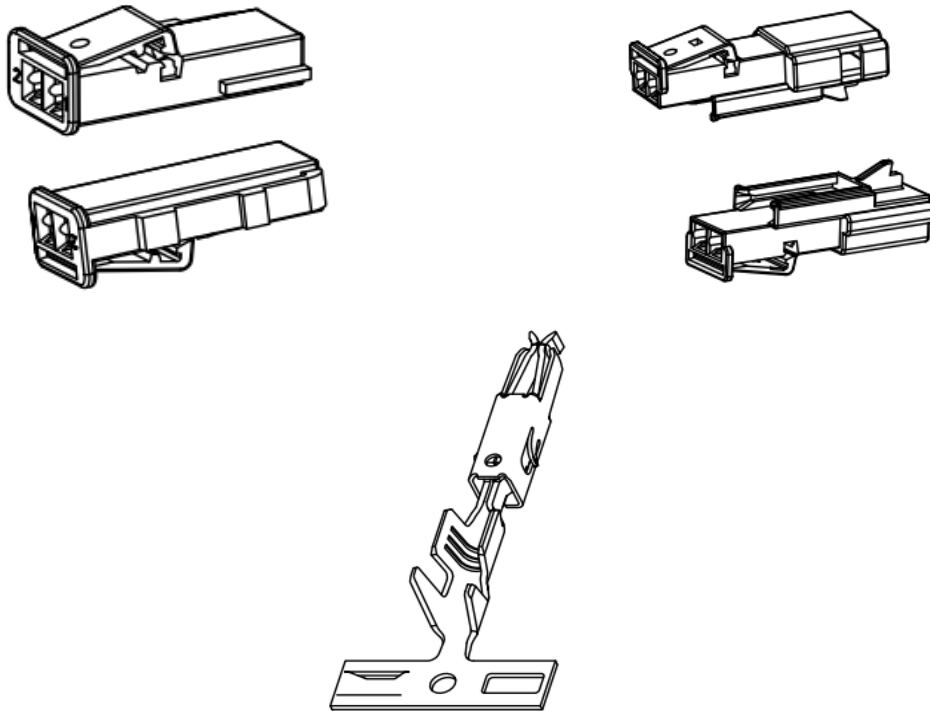

Specifications:

Material:

Insulator:PBT UL94V-0

Rating:

Current Rating:10.0Amp

Voltage Rating:14V AC/DC

Operating Temperature Range:-40°~+85°C


Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.

Dielectric Strength:1000V AC at 50 Hz

or 60 Hz/1600V DC



Ordering Information

H3509M-02P-XX-A

1 2 3 4 5






1: — Series No.

2: — M:Male

3: — No. of position

4: — 01:Type A Black
02:Type B Natural

5: — A:In Bag

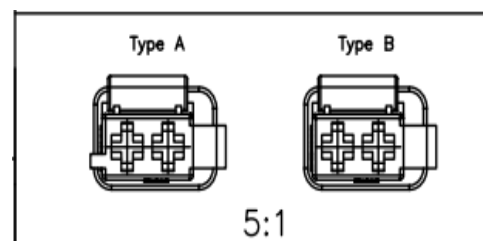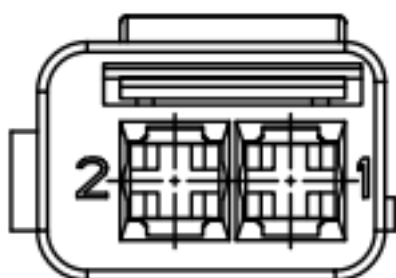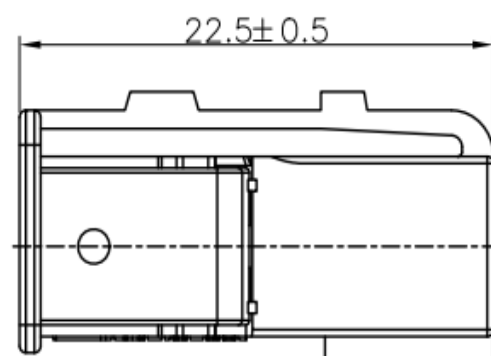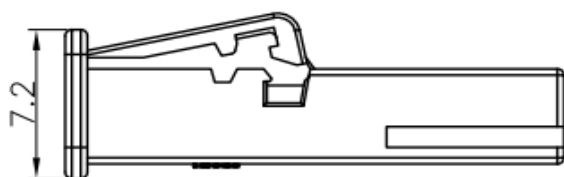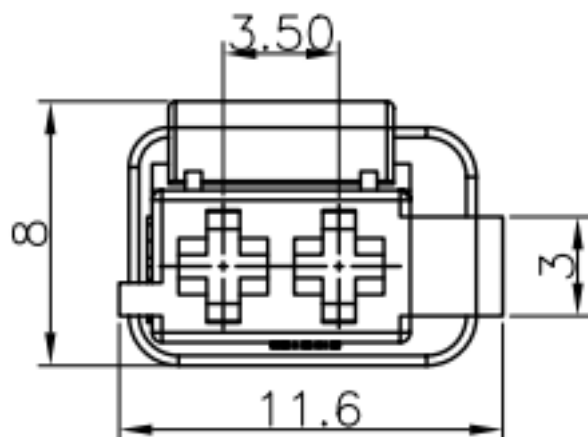

Specifications:

Material:

Insulator:PBT UL94V-0 Color: Black

Rating:

Current Rating:10.0Amp

Voltage Rating:14V AC/DC


Operating Temperature Range:-40°~+85°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:100M ohm min.






Dielectric Strength:1000V AC at 50 Hz
or 60 Hz/1600V DC




Ordering Information
H3509F-02P-01-A

1 2 3 4

- 1: — Series No.
- 2: — F:Female
- 3: — No. of Positions
- 4: — A:In Bag

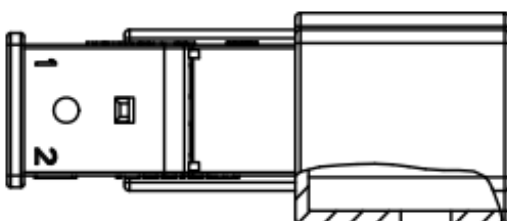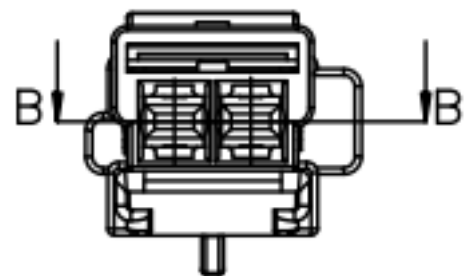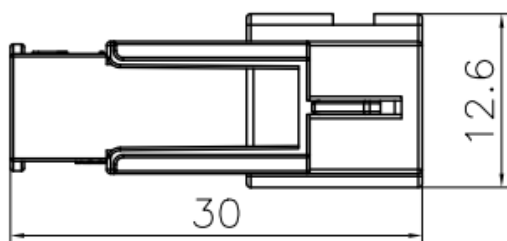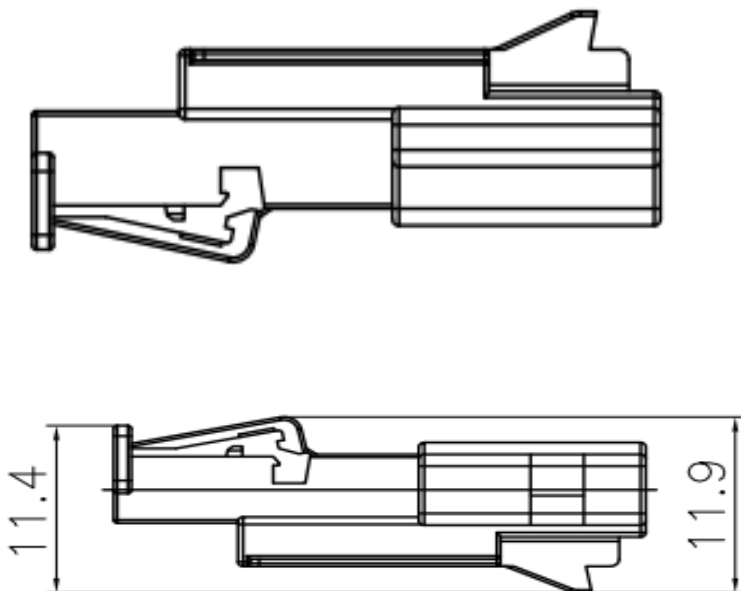

B-B



B-B

Material:

Terminal: Copper alloy

Wire Range: 0.5–1.0mm²

Insulation O.D.: 1.4–2.1mm²

Ordering Information

H3509TF-PQ

1 2 3

1:—Series No.

2:—TF:Female Terminal

3:—Plated:

Q: Tin Plated

