

.150''(3.81mm) Pitch/Disconnectable Insulation Displacement Connectors

.150''(3.81mm) Connectors



.150" (3.81mm) Pitch Wafer

Specifications:

Material And Finish:

Insulator:PBT UL94V-0 Color:Black

Contact:Copper alloy

Plated:See Ordering Information



Rating:

Current Rating:15 Amp Max

Voltage Rating:250V AC/DC

Operating Temperature Range:-55°~+105°C

Electrical:

Contact resistance:10m Ohm Max

Insulator resistance:1000M ohm min.

Withstanding Voltage:1500V AC/Minute

Ordering Information

H38101-XXP-XX-A

1 2 3 4 5

1: — Series No.






2: — No. of Positions

3: — P:PBT


4: — 01:X-KEY Type

02:Y-KEY Type


5: — A:In Bag

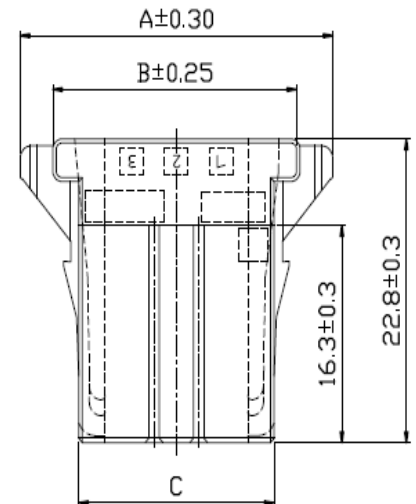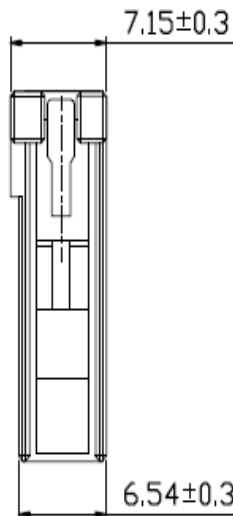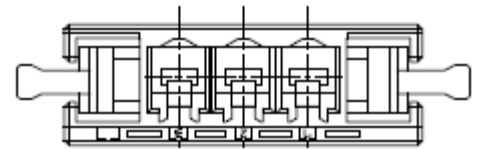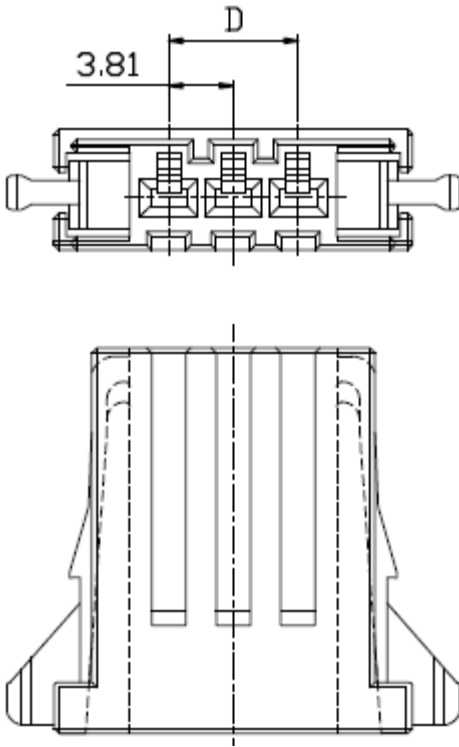


X-KEY Type 3P




Y-KEY Type 3P




X-KEY Type 4P



Y-KEY Type 4P



X-KEY Type 5P, 6P, 8P, 10P



Y-KEY Type 6P, 10P

KEY	PART NO	A	B	C	D
Y	3	26.76	21.16	16.7	7.62
X	3	26.76	21.16	16.7	7.62
Y	4	30.57	24.97	20.51	11.43
X	4	30.57	24.97	20.51	11.43
X	5	34.38	28.78	24.32	15.24
Y	6	38.19	32.59	28.13	19.05
X	6	38.19	32.59	28.13	19.05
X	8	45.81	40.12	35.97	26.67
Y	10	53.43	47.83	43.37	34.29
X	10	53.43	47.83	43.37	34.29

KEYING LOCATION