



.157”(4.00mm) Pitch/Disconnectable Insulation Displacement Connectors


.157”(4.00mm) Connectors



.157" (4.00mm) Pitch Housing






HJBRIGHT®

Specifications:
 Material And Finish:
 Female housing:PA66
 Female inner bladder:PA66
 Clip:PA66
 Seal ring:Silica gel
 Color:Black



Ordering Information
 H40012M-08P-01-A
 1 2 3 4

- 1: — Series No.
- 2: — M:Male Housing
- 3: — No. of Positions
- 4: — In Bag

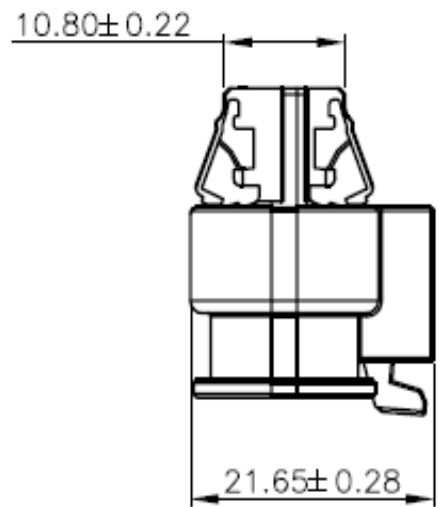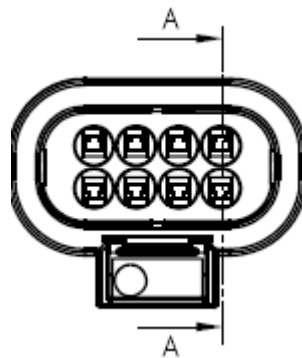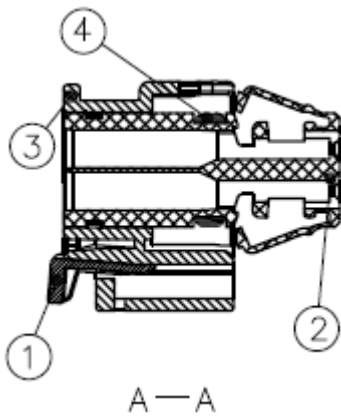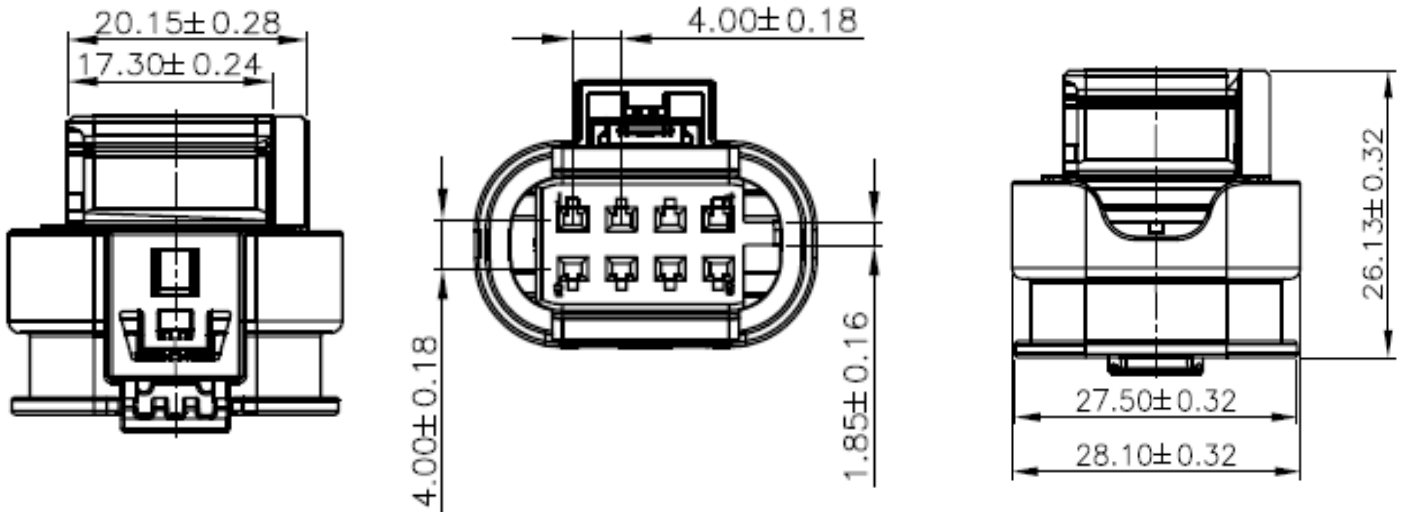


| 1 | 2 | 3 | 4 |
|------|----------------------|----------------|-----------------------|
| Clip | Female inner bladder | Female housing | silicone sealing ring |

东莞市华晶电子有限公司
<http://www.hjbright.com>

Material:
Terminal: Copper alloy

Rating:
Current Rating: 25 Amp
Temperature Range: -40°C ~ +130°C



Ordering Information
H40012TF-PQ-01

1 2 3

- 1: — Series No.
- 2: — TF: Female Terminal
- 3: — Q: Tin Plated

