





Specifications:
 Material And Finish:
 Insulator:Nylon 6T UL94V-0 Color:Black
 Contact:Brass
 Plated:See Ordering Information

Rating:
 Current Rating:3.0 Amp
 Voltage Rating:250V AC/DC
 Operating Temperature Range:-40~+105°C

Electrical:
 Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute

Ordering Information
 254114S-XXX235-NX
 1 2 3 4 5

- 1:— Series No.
- 2:— S: Straight Type
- 3:— No. of Positions
- 4:— A: Gold flash
Q: Tin Plated
S: Matte Tin Plated
- 5:— A: In bag
B: Tube
G: In Tape & Reel

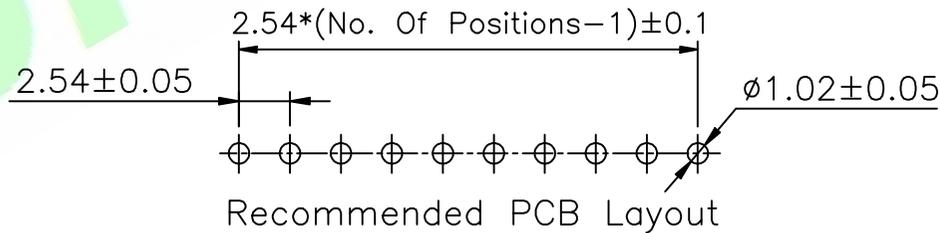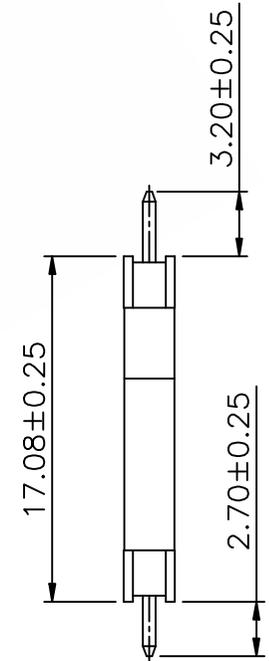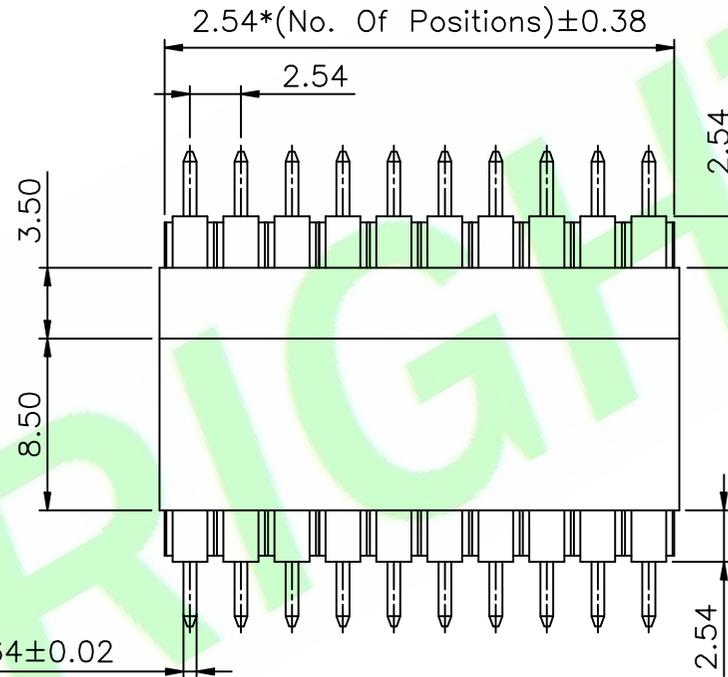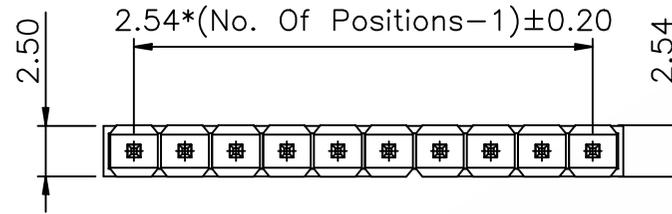

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : 254114S-XXX235-NX	
CHKD.: Hu.ch	LINEAR	ANGLES	DWG. NO.:	
	X.: ±0.30	X': ±5.0°	TITLE :	
APPD.: Billy	X.X: ±0.20	X.X': ±3.0°	2.54mm Pitch Pin Header Straight Type	
	X.XX: ±0.15	X.XX': ±2.0°	DATE: 26-Aug-2025	
	X.XXX: ±0.10	X.XXX': ±1.0°		

HJBRIGHT 東莞市華晶電子有限公司
 BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1
 SCALE: 1:1
 UNIT: mm

THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.