

RoHS Compliant

Automobile
Product




Specifications:
Material And Finish:
Insulator:PBT UL94V-0
Contact:Brass
Plated:Tin Plated

Rating:
Current Rating:3.0 Amp
Voltage Rating:250V AC/DC
Operating Temperature
Range:-40~+125°C





Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:1000M ohm min.
Dielectric Voltage:500V AC/Minute

Ordering Information
A25414RC-08X-XX-XX

- 1 2 3 4 5 6 7
- 1:— Series No.
2:— R:R/A Type
3:— No. of Positions
4:— Q:Tin Plated
S:Matte Tin Plated
5:— 01:A Type
02:B Type
6:— N:Natural
B:Black
LG:Light gray
R:Red
7:— C:In Tray
G:Tape&Reel

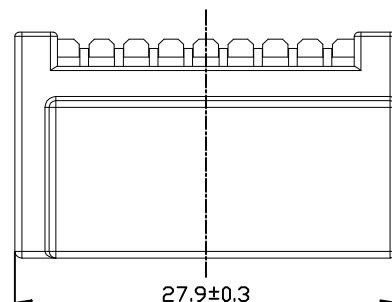


Section A-A

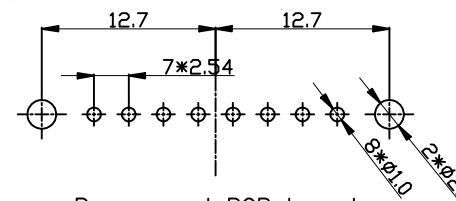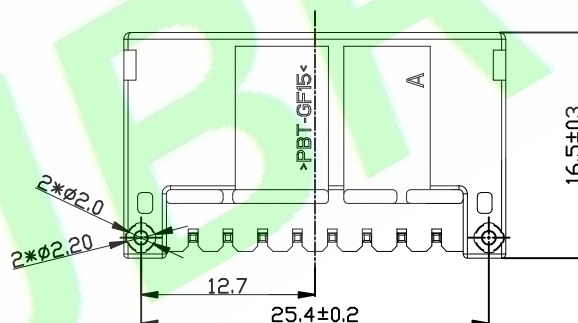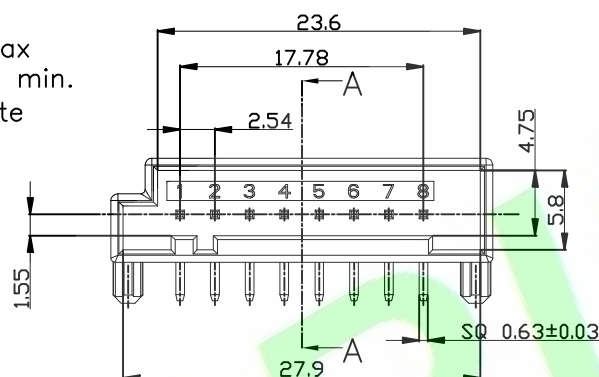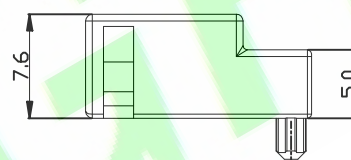


Recommend PCB Layout

A Type

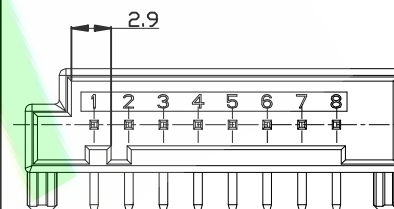

Natural/Black

B Type

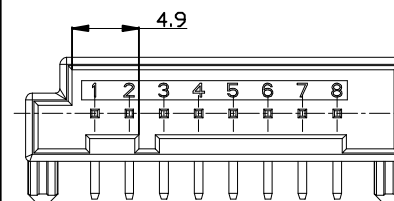

Black/Light gray/Red

DR.BY.:
Judyyan

CHKD.:
Hu.ch

APPD.:
Billy

GENERAL TOLERANCE:

LINEAR	ANGLES
X.: ±0.30	X': ±5.0°
X.X: ±0.20	X.X': ±3.0°
X.XX: ±0.15	X.XX': ±2.0°
X.XXX: ±0.10	X.XXX': ±1.0°

PART NO : A25414RC-08X-XX-XX

DWG. NO.:

TITLE :
2.54mm Pitch Wafer R/A Type

DATE: 4-Dec-2024

HJBRIGHT® 东莞市華晶電子有限公司

BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/1

SCALE: 1:1

UNIT: mm



THIRD ANGLE PROJECTION

A4

1X	ORIGINAL	Judyyan	
REV.	DESCRIPTION	DR.BY	ECN. NO.