
RoHS Compliant


Automobile Product


Specifications:
Material And Finish:
Insulator:PA9T UL94V-0
Color: Black
Contact:Brass
Plated:See Ordering information

Rating:
Current Rating:1.0 Amp
Voltage Rating:1000V AC/DC
Operating Temperature Range:-40°~+125°C

Electrical:
Contact resistance:20m Ohm Max
Insulator resistance:100M ohm min.
Withstanding Voltage:2000V AC/Minute

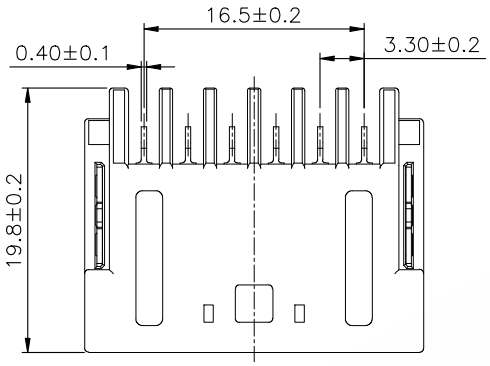


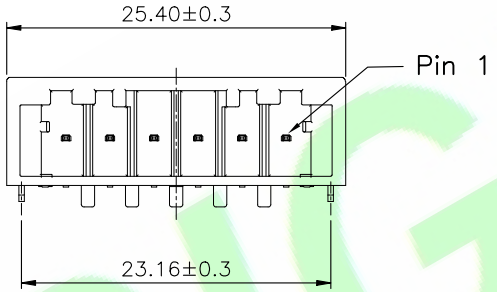


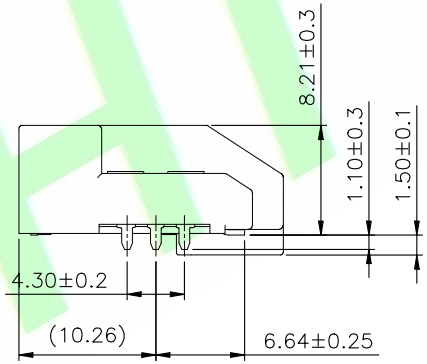

Ordering Information
A3300H-06Q-01-G
1 2 3 4 6

1:—Series No.
2:—H:Horizontal SMT Type
3:—No. of Positions
4:—Q:Tin Plated
6:—G:In Tape&Reel

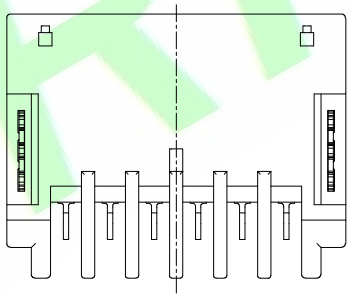

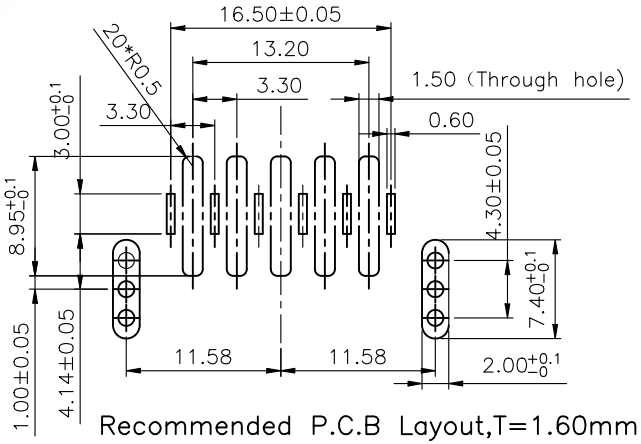

Recommended P.C.B Layout,T=1.60mm
Recommended tolerance: ±0.05

HJBRIGHT®

DR.BY.: Judyyan	GENERAL TOLERANCE:		PART NO : A3300H-06Q-01-G
	LINEAR	ANGLES	DWG. NO.:
CHKD.: Tony	X.: ±0.40	X°: ±5.0°	TITLE : 3.30mm Pitch Wafer Connector Horizontal SMT Type
	X.X: ±0.30	X.X°: ±3.0°	
APPD.: Billy	X.XX: ±0.20	X.XX°: ±2.0°	DATE: 20-Nov-2024
	X.XXX: ±0.10	X.XXX°: ±1.0°	

HJBRIGHT® 東莞市華晶電子有限公司
BRIGHT-E ELECTRONIC TECHNOLOGY LIMITED

SHEET: 1/3
SCALE: 1:1
UNIT: mm
THIRD ANGLE PROJECTION
A4

REV.	DESCRIPTION	DR.BY	ECN. NO.
1X	ORIGINAL	Judyyan	